

Altivar 1200

315 ... 16200 kVA

Catalogue

English

2014



8 P02 640 EN.00/01

www.schneider-electric.com

Schneider
 **Electric**

Important information

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. If you have any suggestions for improvements or amendments or have found errors in this publication, please notify us.

No part of this document may be reproduced in any form or by any means, electronic or mechanical, including photocopying, without express written permission of Schneider Electric.

All pertinent state, regional, and local safety regulations must be observed when installing and using this product. For reasons of safety and to help ensure compliance with documented system data, only the manufacturer should perform repairs to components.

When devices are used for applications with technical safety requirements, the relevant instructions must be followed.

Failure to use Schneider Electric software or approved software with our hardware products may result in injury, harm, or improper operating results.

Failure to observe this information can result in injury or equipment damage.

© 2014 Schneider Electric. All rights reserved.

Altivar 1200 Medium Voltage Drive Systems

| | |
|-------------------------------------|-----|
| ▪ Medium Voltage Drive Systems..... | 1 |
| ▫ Content..... | 1 |
| ▫ Overview..... | 2 |
| ▫ Presentation | 4 |
| ▫ Purchase order | 11 |
| ▫ Selection and ordering data | 12 |
| Output voltage 3.3 kV..... | 12 |
| Output voltage 4.16 kV..... | 13 |
| Output voltage 5.5 kV..... | 14 |
| Output voltage 6.0 kV..... | 15 |
| Output voltage 6.3 kV..... | 16 |
| Output voltage 6.6 kV..... | 17 |
| Output voltage 10 kV..... | 18 |
| ▫ General technical data | 19 |
| ▫ Standard wiring diagram..... | 21 |
| ▫ Technical data | 22 |
| Output voltage 3.3 kV..... | 22 |
| Output voltage 4.16 kV..... | 49 |
| Output voltage 5.5 kV..... | 76 |
| Output voltage 6.0 kV..... | 112 |
| Output voltage 6.3 kV..... | 148 |
| Output voltage 6.6 kV..... | 180 |
| Output voltage 10 kV..... | 212 |

Altivar 1200

Medium Voltage Drive Systems

| | |
|---------------|-----------------------------|
| Type of drive | Pumps, fans and compressors |
|---------------|-----------------------------|



| | |
|-------------------|--|
| Type | ATV 1200 |
| Brief description | Medium Voltage Drive System with multi-pulse transformer and low voltage inverter cascade provides a sinusoidal sine wave at both input and output with low THD(i). |
| Power ranges | 315 ... 16200 kVA |
| Voltage ranges | 2.4 kV <i>on request</i> 3.3 kV 4.16 kV 5.5 / 6.0 kV 6.3 / 6.6 kV 10 kV 11 kV <i>on request</i> |
| Output frequency | 0.5 ... 120 Hz for V/f characteristic 0.5 ... 70 Hz for vector control |
| Control method | V/f characteristic, flux vector control sensorless flux vector control closed-loop control with encoder |
| Interfaces | 10 inch LCD touch screen as operating panel in the enclosure door, I/O ports analog logic, Connection via Modbus, Modbus TCP, Ethernet IP, Profibus or DeviceNet |
| Protection degree | IP31 design of the enclosure IP41 enclosure design optional available IP42 enclosure design optional available |
| Further reading | Information about project planning and order can be found in this document. |

Altivar 1200

Medium Voltage Drive Systems


| | | |
|---------------|----------------|---|
| Type of drive | Pumps and fans | Drives with high performance in industry, machine building and automation |
|---------------|----------------|---|



| | | |
|-------------------|---|-------------|
| Type | ATV 61 Plus | ATV 71 Plus |
| Brief description | Altivar Drive Systems with increased protection degree, alternatively in the standard design, with additionally installed options or as a customized solution | |
| Power ranges | ATV61ES5●●●N4 90...630 kW ATV61EX●●●●●N4 90...1400 kW ATV61EX●●●●●N 90...1800 kW ATV61EX●●●●●Y 110...2400 kW | |
| Voltage ranges | ATV61ES5●●●N4 380...415 V ATV61EX●●●●●N4 400 (380, 415) V ATV61EX●●●●●N 500 (525) V ATV61EX●●●●●Y 690 V Other voltages are available on request. | |
| Output frequency | 0.1 ... 500 Hz | |
| Control method | V/f characteristic (2 or 5 points), vector-oriented flux control without feedback, energy saving system | |
| Interfaces | Operating panel in the enclosure door with a transparent cover, control terminals either directly in the inverter or in the enclosure, control terminals can be extended, fieldbus connection via Modbus or CANopen | |
| Protection degree | IP23 design of the enclosure IP54 design of the enclosure IP54 design of the enclosure with separated air flow | |
| Further reading | Information about project planning and order can be found in the product catalogue "Variable speed drives for asynchronous motors Altivar 61". | |

Altivar 1200

Medium Voltage Drive Systems

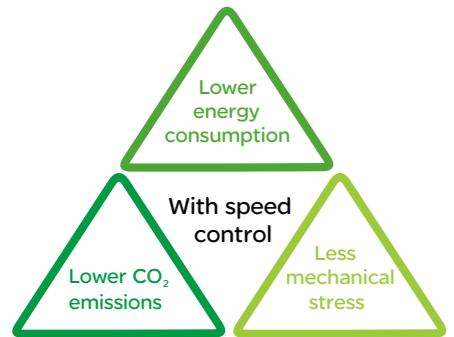**ATV1200 - Preference of energy-saving and efficiency-improving**

Schneider Electric, your energy management expert, can help you to identify potential energy savings according to your installation by performing an audit of your power distribution, motor control and control system etc. The results are presented by an audit report as well as recommendations to improve efficiency of your system.

The audit

- Identify opportunities for saving energy
- Fine-tune a selection of solutions for achievable savings
- Calculate the return on investment

Associated services available

- Measurement and analysis of your consumption (before and after modifications)
- Installation of variable speed drives
- Power factor correction
- Setup and training of your teams
- Follow-up and commitment on achievable savings


Energy demand is on the rise and so are federal and international regulations requiring the reduction in our global carbon footprint.

To do this, a variable energy management solution is paramount. This starts by better managing motors that control pump, fan and compressor. Research shows that these motors consume 70% of the energy of industries and infrastructures.

With Altivar® variable frequency drives from Schneider Electric you can achieve energy savings of up to 40%, depending on the type of installation.

Altivar 1200

Medium Voltage Drive Systems

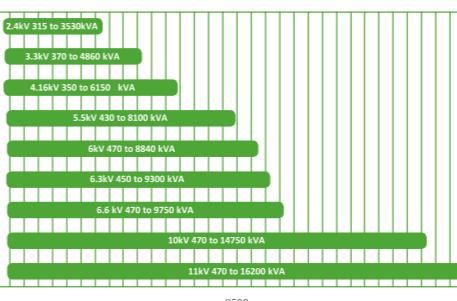

Range overview

Introduction

Altivar 1200 Medium Voltage Drive System is designed with high reliability, easy to use and good performance.

The Altivar 1200 can be applied to three-phase medium-voltage asynchronous motors (sensor/sensorless vector control mode) as well as synchronous motors (V/f mode). With the latest IGBT type, our drive can be used in applications which need higher precision requirements.

Benefits / features**Optimized cabinet**

- Up to 30% size reduction on the footprint thanks to combined cabinet
- Front access enables an easy access to the control and transformer cabinet. It makes the installation and maintenance operations easier to save time.
- Certified IP31, IP41 & IP42 cabinet (even on top cooling fans)

Well equipped as standard

The ATV1200 proposes high performance in the standard execution offering comfort and reliability such as:


- Protection: Interlocks system (according to customer requirements), special tool to open the door is needed, power off signal, handle lock
- Comfort: Large 10" HMI, new easy software configuration, internal lightening, free I/O)
- Reliability: UPS
- CE marking

Simple and well proven core design**Multi-level technology**


- Flexibility: This technology enables to operate very old direct on line motors without additional components. It allows to achieve significant energy saving as well as a quick return on investment.

Improve OPEX and CAPEX

- The low harmonics THDI<2% is obtained thanks to the multi-level technology that provides a clean sinusoidal waveform fulfilling major standards
- The quality of the output voltage creates no stress on motor shaft and terminals avoiding special isolation of the motor
- Long motor cable - up to 2000m without additional components
- No special motor cable required
- Increased motor lifetime due to low dv/dt and voltage steps

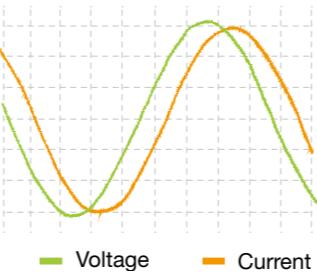

Input waveform

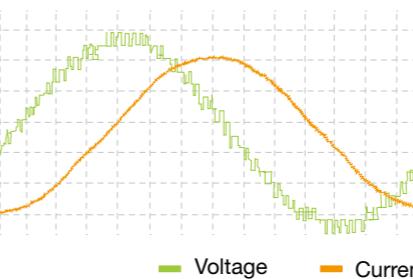

Output waveform

Applications**Cement**

- Kiln head exhaust fan
- Preheater fan
- Kiln filter fan
- Rotary kiln (single drive, multiple drives)
- Cement mill (multiple drives)

Water Industry

- Water suction pump
- Water supply pump
- Primary suction pump
- Secondary clean water pump

Coal Mine

- Belt conveyor (single drive, multiple drives)
- Mine ventilator

Power Plant

- Boiler induced draught fan
- Boiler forced draught fan
- Primary fan
- Condensate pump
- Sewage pump etc.

Petroleum and Petrifactions

- Kiln head exhaust fan
- Air compressor
- Water injection pump
- Submersible pump
- Desolvante raw material pump
- Distillation tower bottom pump
- Coking furnace radiation pump
- Diesel oil transfer pump

Metallurgy

- Kiln head exhaust fan
- Blast-furnace blower
- Primary dedusting fan
- Dry quenching circulating fan
- Main exhaust fan for sintering
- High-pressure phosphorous removal pump



Altivar 1200

Medium Voltage Drive Systems



Efficient cooling system

- Well arranged sharing of cooling air flow managed only by main cooling fans avoids bottom transformer fans and cooling fans on the electronic compartments.
- Improved Total Drive Efficiency as transformer bottom fans are removed. The energy savings are significant and the drive efficiency is improved by up to 0.3%

Inverter stage

- The drive's inverter is based on a modular architecture using low voltage IGBT which are widely used and proven for its reliability in the industry. The inverter stage is composed with modular that can be removed within a few minutes for maintenance
- Separated air flow in control cabinet: The conception of the control cabinet avoids any local fans inside the cabinet. The air flow circulates efficiently due to the ATV1200 design to cool down the control cabinet components. It avoids the need of maintenance operation and increase the reliability of drive

Standards and regulations

The entire ATV1200 range conforms to international requirements in order to provide efficient and appropriate usage of products by the end user, machine manufacturer or system integrator.

Low voltage directive (LCD)

As declared by the CE mark, the mechanical and electrical design of the Low voltage cabinet (control cabinet) meets the European Directive LVD 2006/95/EC IEC with regards to the IEC standards 61800-5-1.

Electromagnetic compatibility directive (EMC)


As declared by a Schneider Electric manufacturing certification, qualified testing lab and certification authority, the ATV1200 range fulfills the conformity to electromagnetic directive EMC 2004/108/EC with regards to the IEC standards 61800-3.

Machine directive

The ATV1200 drive is to be installed as a part of a machine, system or plant. The responsibility of the machine manufacturer or system integrator is involved as it refers to the method of installation. An appropriate usage of products ensures the compliance to the machine directive with regards to the IEC standards 61800-5-1, 60204-1, 60204-11. Drive operation remains totally prohibited without prior establishment of conformity by the machine manufacturer or integrator.

Altivar 1200

Medium Voltage Drive Systems

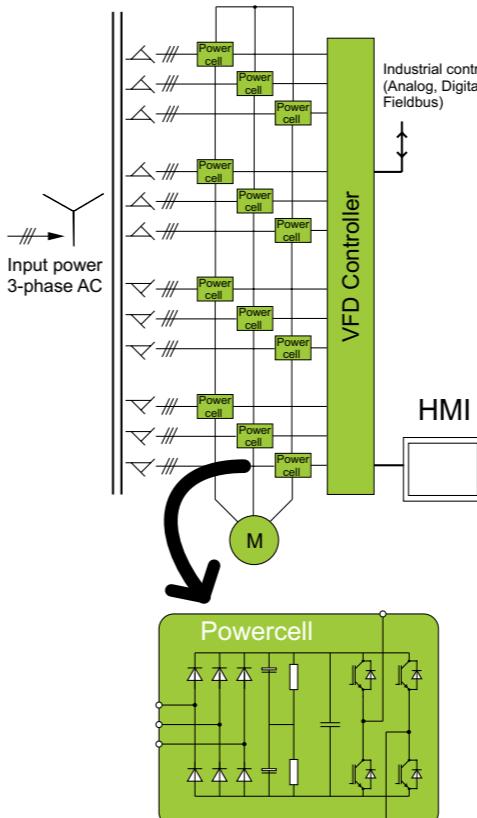

ATV1200 multilevel architecture

Drive topology

Its simple two level power cell design takes away the complexity of multilevel architecture and makes it into a clear and easy understandable technology. This saves your maintenance cost because the crew will easily understand Altivar 1200.

The core component of ATV1200 is the "Power cell". This "Power cell" is a single phase, two level output switching device, supplied by a 700V low voltage winding of a transformer.

The big advantage of this is, that the switching elements are state-of-the-art LV components. By putting this AC - supplies in series, higher voltages are achieved. The number of "Power cells" determines the output voltage. Every cell provides a small step of motor supply, resulting in a smooth waveform. Phase shifting can be done on the secondary windings of transformer, allowing an elimination of harmonics of input.

The cells create the right part of the drive and the transformer the left section of the drive. The drives regulation system and control is installed in front of the drive to provide an optimized footprint. The transformer and cell section can be separated for easy installation. Adequate cooling fans on top of the panel are supplied by additional secondary windings of the integrated transformer. This avoids additional 3phase supplies for the drive.

Schneider Electric offers this transformer in a standard efficiency as well as in increased high efficiency.

Benefits

- Easy understandable multilevel architecture saves money in case of maintenance
- Less spare parts because only one power cell design is needed for the whole drive
- Smooth output voltage because each power cell provides only a small step of the voltage



Typical output waveform of a single power cell

Altivar 1200

Medium Voltage Drive Systems



Control- and transformer cabinet

Control- and Transformer cabinet

Clever and modular arrangement of control section in front of transformer. This section with independent access allows the integration of additional components according to your personal needs.

Benefits

- Space optimized dimensions without squeezing components in small compartments, granting you a very long lifetime avoiding any hot spot inside the system
- The integrated transformer and multilevel structure helps to avoid bearing currents in existing motors. This results in a capability to run your very old motor on a very new MV drive, leading to a drastic reduction of energy costs where your damper controlled fan or throttle controlled pump is concerned


Altivar 1200

Medium Voltage Drive Systems


**Cooling concept**

Innovative transformer design with optimized cooling arrangement without the need of additional bottom blowers, keeping maintenance costs very low and increasing the availability due to reduced number of fans. A reduced number of fans in ATV1200 also improves the total efficiency. Small fans should be avoided.

The bottom transformer blowers are replaced by an innovative air duct system for a better cooling system. The airflow circulation inside the transformer cabinet becomes more efficient avoiding hotspots. This increases the transformer lifetime.

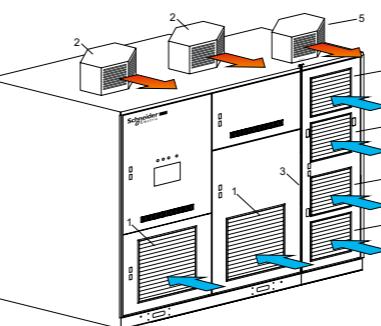**Standard cooling**


- 1.....Air inlet grid for transformer cabinet
- 2.....Air outlet with fans
- 3.....Guided air flow to avoid internal air short-circuit between transformer- and power cell cabinet
- 4.....Air inlet grid for power cell cabinet
- 5.....Air outlet with fans

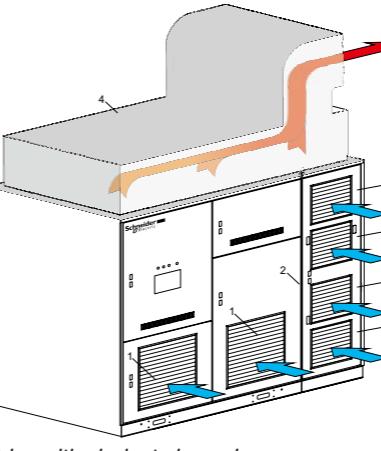

Drive with air duct channel

Cooling with air duct channel (as an option)


The ATV1200 can be equipped with the air duct system to exhaust losses outside the electrical room. This solution optimizes the design of the air conditioning system. Clean air has to be provided in the drive air inlets.

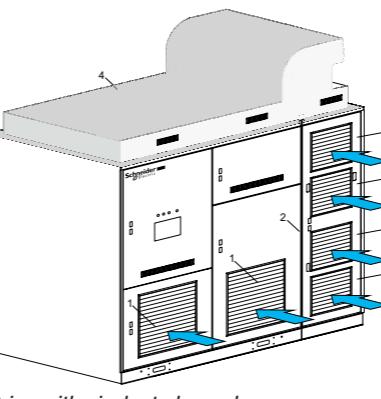

Drive with air duct channel

Audible noise silencer (as an option)

The ATV1200 can be equipped with a silencer to reduce the audible noise generated by the drive. This solution mitigates the noise generated by the fan cooling system (on the top) and provides a better comfort to the surroundings. With this option the audible noise reaches 76db(A) during drive operation.

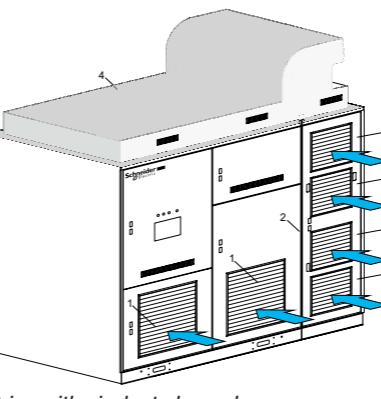

- 1.....Air inlet grid for transformer cabinet
- 2.....Guided air flow to avoid internal air short-circuit between transformer- and power cell cabinet
- 3.....Air inlet grid for power cell cabinet
- 4.....Air duct channel with audible noise silencer



Power cells cabinet



Power cell

Altivar 1200

Medium Voltage Drive Systems



Friendly user interface



Intuitive windows arrangement

Control features

Friendly and easy-to-use interface with LCD touch-screen. Windows arrangement to guide you in few touches to the required result.

- Motor control mode
V/f control, sensor/sensorless flux vector control, closed-loop control with encoder
- Number of quadrant
2Q
- Steady operation
Speed precision in steady state: $\pm 0.5\%$
Closed-loop speed precision: $\pm 0.1\%$
- Protection
Overcurrent, overvoltage, undervoltage, controller shutdown, cooling fan stop, overload, overtemperature, communication interruption, ground fault, phase lose
- Interface
10 inch large LCD touch-screen
Visual and audible alarm for drive status
- Communication
Modbus, Modbus TCP, Ethernet IP, Profibus or DeviceNet
- PID function
Integrated PID regulator, and parameters can be set
- I/O function
I/O ports can be expanded according to user's requirements
- Operation mode
Local / remote
- Frequency setting
Manual operation, analogue/digital reference setting
- Human-Machine interface display
Output frequency, voltage, current, power and input voltage, current, power, power factor, parameters setting, voltage and current waveform, transformer temperature, drive status and records.



SM6 modular units

Altivar 1200

Medium Voltage Drive Systems

The product designation of the Altivar frequency inverters consists of several points of reference (characters and figures). The meaning of each point is illustrated in the following example.

ATV1200 -A 470 - 66 66 A 3 S

| Serial Name | Cooling type: | Drive(kVA) | Input voltage*: | Output voltage: | Style: | IP: | Drive efficiency: |
|--------------------|---------------|------------|-----------------|-----------------|---------------------------|----------|--|
| "A" for air cooled | | | "24"…2.4 kV | "24"…2.4 kV | "A"… Async. motor control | "3"…IP31 | Drive efficiency |
| | | | "30"…3.0 kV | "30"…3.0 kV | "B"… Async. motor control | "4"…IP41 | "S"… Standard efficiency ($\geq 96\%$) |
| | | | "33"…3.3 kV | "33"…3.3 kV | with Powercell bypass | "5"…IP42 | "H"… High efficiency ($\geq 96.5\%$) |
| | | | "42"…4.16 kV | "42"…4.16 kV | "S"… Sync. motor control | | |
| | | | "55"…5.5 kV | "55"…5.5 kV | "Y"… Sync. motor control | | |
| | | | "60"…6.0 kV | "60"…6.0 kV | with Powercell bypass | | |
| | | | "63"…6.3 kV | "63"…6.3 kV | | | |
| | | | "66"…6.6 kV | "66"…6.6 kV | | | |
| | | | "69"…6.9 kV | "69"…6.9 kV | | | |
| | | | "10"…10 kV | "10"…10 kV | | | |
| | | | "11"…11 kV | "11"…11 kV | | | |
| | | | "14"…13.8 kV | | | | |

*) Input voltage must be higher than or equal to the output voltage

Key functions

- Soft start function (including synchronization and bypass)
- Multi pump (cascade mode)
- Multi motors control (cascade motors)
- Catch on fly (low and high inertia)
- Simulation mode for commissioning
- Master slave function up to 3 drives (1 master, 2 slaves)
- Speed synchronized control (load sharing)
- Motor autotuning
- Auto restart (after input voltage drop)

SM6 - Modular units (as option)

SM6 switchgear has been specifically designed on the basis of that extensive experience.

The SM6 can easily integrate the captive key of interlock system which employed by ATV1200 into its system.

A comprehensive solution

SM6 switchgear is fully compatible with

- Power Meter metering units.
- Sepam multi-function protection relays for protection, measurements and diagnosis.
- VIP protection self powered relay for protection.

**Selection and ordering
data**

Altivar 1200
Medium Voltage Drive Systems
Output voltage 3.3 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|---------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 3.3 kV | | | | | | | | |
| ATV1200-A370-3333••• | 370 | 309 | 65 | 52 | 65 | 9 | 18 | 2200 |
| ATV1200-A470-3333••• | 470 | 393 | 82 | 66 | 100 | 9 | 18 | 2400 |
| ATV1200-A570-3333••• | 570 | 477 | 100 | 80 | 100 | 9 | 18 | 2600 |
| ATV1200-A660-3333••• | 660 | 552 | 116 | 93 | 135 | 9 | 18 | 3200 |
| ATV1200-A770-3333••• | 770 | 644 | 135 | 108 | 135 | 9 | 18 | 3200 |
| ATV1200-A860-3333••• | 860 | 719 | 150 | 120 | 150 | 9 | 18 | 3400 |
| ATV1200-A1000-3333••• | 1000 | 836 | 175 | 140 | 200 | 9 | 18 | 4300 |
| ATV1200-A1140-3333••• | 1140 | 953 | 200 | 160 | 200 | 9 | 18 | 4600 |
| ATV1200-A1250-3333••• | 1250 | 1045 | 220 | 176 | 220 | 9 | 18 | 4700 |
| ATV1200-A1400-3333••• | 1400 | 1170 | 245 | 196 | 280 | 9 | 18 | 5000 |
| ATV1200-A1600-3333••• | 1600 | 1338 | 280 | 224 | 280 | 9 | 18 | 5400 |
| ATV1200-A1830-3333••• | 1830 | 1530 | 320 | 256 | 320 | 9 | 18 | 6400 |
| ATV1200-A2000-3333••• | 2000 | 1672 | 350 | 280 | 410 | 9 | 18 | 6500 |
| ATV1200-A2340-3333••• | 2340 | 1956 | 410 | 328 | 410 | 9 | 18 | 7100 |
| ATV1200-A2800-3333••• | 2800 | 2341 | 490 | 392 | 490 | 9 | 18 | 7800 |
| ATV1200-A3150-3333••• | 3150 | 2633 | 550 | 440 | 550 | 9 | 18 | 9800 |
| ATV1200-A3500-3333••• | 3500 | 2926 | 612 | 490 | 720 | 9 | 18 | 10200 |
| ATV1200-A3780-3333••• | 3780 | 3160 | 661 | 529 | 720 | 9 | 18 | 10600 |
| ATV1200-A4120-3333••• | 4120 | 3444 | 720 | 576 | 720 | 9 | 18 | 11100 |
| ATV1200-A4460-3333••• | 4460 | 3729 | 780 | 624 | 850 | 9 | 18 | 11800 |
| ATV1200-A4860-3333••• | 4860 | 4063 | 850 | 680 | 850 | 9 | 18 | 12400 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

**Selection and ordering
data**

Altivar 1200
Medium Voltage Drive Systems
Output voltage 4.16 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|-------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|---------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 4.16 kV | | | | | | | | |
| ATV1200-A350-4242••• | 350 | 293 | 49 | 39 | 65 | 12 | 24 | 2400 |
| ATV1200-A470-4242••• | 470 | 393 | 65 | 52 | 65 | 12 | 24 | 2600 |
| ATV1200-A560-4242••• | 560 | 468 | 78 | 62 | 100 | 12 | 24 | 2800 |
| ATV1200-A720-4242••• | 720 | 602 | 100 | 80 | 100 | 12 | 24 | 3100 |
| ATV1200-A790-4242••• | 790 | 660 | 109 | 87 | 150 | 12 | 24 | 3800 |
| ATV1200-A940-4242••• | 940 | 786 | 130 | 104 | 150 | 12 | 24 | 4000 |
| ATV1200-A1080-4242••• | 1080 | 903 | 150 | 120 | 150 | 12 | 24 | 4400 |
| ATV1200-A1190-4242••• | 1190 | 995 | 165 | 132 | 200 | 12 | 24 | 5000 |
| ATV1200-A1450-4242••• | 1450 | 1212 | 200 | 160 | 200 | 12 | 24 | 5300 |
| ATV1200-A1585-4242••• | 1585 | 1325 | 220 | 176 | 220 | 12 | 24 | 5600 |
| ATV1200-A1750-4242••• | 1750 | 1463 | 243 | 194 | 280 | 12 | 24 | 5800 |
| ATV1200-A2020-4242••• | 2020 | 1689 | 280 | 224 | 280 | 12 | 24 | 6300 |
| ATV1200-A2310-4242••• | 2310 | 1931 | 320 | 256 | 320 | 12 | 24 | 7700 |
| ATV1200-A2500-4242••• | 2500 | 2090 | 347 | 278 | 410 | 12 | 24 | 7900 |
| ATV1200-A2960-4242••• | 2960 | 2475 | 410 | 328 | 410 | 12 | 24 | 8500 |
| ATV1200-A3130-4242••• | 3130 | 2617 | 434 | 347 | 490 | 12 | 24 | 8800 |
| ATV1200-A3530-4242••• | 3530 | 2951 | 490 | 392 | 490 | 12 | 24 | 9600 |
| ATV1200-A4000-4242••• | 4000 | 3344 | 550 | 440 | 550 | 12 | 24 | 12100 |
| ATV1200-A4400-4242••• | 4400 | 3678 | 611 | 489 | 720 | 12 | 24 | 12500 |
| ATV1200-A4760-4242••• | 4760 | 3979 | 661 | 529 | 720 | 12 | 24 | 13000 |
| ATV1200-A5200-4242••• | 5200 | 4347 | 720 | 576 | 720 | 12 | 24 | 13800 |
| ATV1200-A5650-4242••• | 5650 | 4723 | 784 | 627 | 850 | 12 | 24 | 14200 |
| ATV1200-A6150-4242••• | 6150 | 5141 | 850 | 680 | 850 | 12 | 24 | 14700 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

**Selection and ordering
data**

Altivar 1200
Medium Voltage Drive Systems
Output voltage 5.5 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|------------------------------|------------------------------------|-----------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|------------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 5.5 kV | | | | | | | | |
| ATV1200-A430-5555••• | 430 | 359 | 45 | 36 | 65 | 15 | 30 | 2900 |
| ATV1200-A520-5555••• | 520 | 435 | 55 | 44 | 65 | 15 | 30 | 2900 |
| ATV1200-A620-5555••• | 620 | 518 | 65 | 52 | 65 | 15 | 30 | 3300 |
| ATV1200-A730-5555••• | 730 | 610 | 76 | 61 | 100 | 15 | 30 | 3300 |
| ATV1200-A860-5555••• | 860 | 719 | 90 | 72 | 100 | 15 | 30 | 3600 |
| ATV1200-A960-5555••• | 960 | 803 | 100 | 80 | 100 | 15 | 30 | 3800 |
| ATV1200-A1090-5555••• | 1090 | 911 | 114 | 91 | 135 | 15 | 30 | 4100 |
| ATV1200-A1290-5555••• | 1290 | 1078 | 135 | 108 | 135 | 15 | 30 | 5100 |
| ATV1200-A1430-5555••• | 1430 | 1195 | 150 | 120 | 150 | 15 | 30 | 5300 |
| ATV1200-A1610-5555••• | 1610 | 1346 | 168 | 135 | 200 | 15 | 30 | 5500 |
| ATV1200-A1910-5555••• | 1910 | 1597 | 200 | 160 | 200 | 15 | 30 | 6600 |
| ATV1200-A2100-5555••• | 2100 | 1756 | 220 | 176 | 220 | 15 | 30 | 6900 |
| ATV1200-A2300-5555••• | 2300 | 1923 | 241 | 192 | 280 | 15 | 30 | 7200 |
| ATV1200-A2670-5555••• | 2670 | 2232 | 280 | 224 | 280 | 15 | 30 | 7800 |
| ATV1200-A2870-5555••• | 2870 | 2399 | 301 | 241 | 320 | 15 | 30 | 8100 |
| ATV1200-A3050-5555••• | 3050 | 2550 | 320 | 256 | 320 | 15 | 30 | 10000 |
| ATV1200-A3210-5555••• | 3210 | 2684 | 337 | 269 | 410 | 15 | 30 | 10300 |
| ATV1200-A3610-5555••• | 3610 | 3018 | 379 | 303 | 410 | 15 | 30 | 10900 |
| ATV1200-A3910-5555••• | 3910 | 3269 | 410 | 328 | 410 | 15 | 30 | 11100 |
| ATV1200-A4100-5555••• | 4100 | 3428 | 430 | 344 | 490 | 15 | 30 | 11300 |
| ATV1200-A4680-5555••• | 4680 | 3912 | 490 | 392 | 490 | 15 | 30 | 12500 |
| ATV1200-A5250-5555••• | 5250 | 4389 | 550 | 440 | 550 | 15 | 30 | 15300 |
| ATV1200-A5810-5555••• | 5810 | 4857 | 611 | 489 | 720 | 15 | 30 | 15600 |
| ATV1200-A6300-5555••• | 6300 | 5267 | 660 | 528 | 720 | 15 | 30 | 16500 |
| ATV1200-A6900-5555••• | 6900 | 5768 | 720 | 576 | 720 | 15 | 30 | 18400 |
| ATV1200-A7450-5555••• | 7450 | 6228 | 780 | 624 | 850 | 15 | 30 | 19900 |
| ATV1200-A8100-5555••• | 8100 | 6772 | 850 | 680 | 850 | 15 | 30 | 20300 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

**Selection and ordering
data**

Altivar 1200
Medium Voltage Drive Systems
Output voltage 6.0 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|------------------------------|------------------------------------|-----------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|------------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 6.0 kV | | | | | | | | |
| ATV1200-A470-6060••• | 470 | 393 | 45 | 36 | 65 | 15 | 30 | 2900 |
| ATV1200-A570-6060••• | 570 | 477 | 55 | 44 | 65 | 15 | 30 | 2900 |
| ATV1200-A670-6060••• | 670 | 560 | 65 | 52 | 65 | 15 | 30 | 3300 |
| ATV1200-A790-6060••• | 790 | 660 | 76 | 61 | 100 | 15 | 30 | 3300 |
| ATV1200-A940-6060••• | 940 | 786 | 90 | 72 | 100 | 15 | 30 | 3600 |
| ATV1200-A1040-6060••• | 1040 | 869 | 100 | 80 | 100 | 15 | 30 | 3800 |
| ATV1200-A1190-6060••• | 1190 | 995 | 114 | 91 | 135 | 15 | 30 | 4100 |
| ATV1200-A1400-6060••• | 1400 | 1170 | 135 | 108 | 135 | 15 | 30 | 5100 |
| ATV1200-A1560-6060••• | 1560 | 1304 | 150 | 120 | 150 | 15 | 30 | 5300 |
| ATV1200-A1750-6060••• | 1750 | 1463 | 168 | 135 | 200 | 15 | 30 | 5500 |
| ATV1200-A2080-6060••• | 2080 | 1739 | 200 | 160 | 200 | 15 | 30 | 6600 |
| ATV1200-A2290-6060••• | 2290 | 1914 | 220 | 176 | 220 | 15 | 30 | 6900 |
| ATV1200-A2500-6060••• | 2500 | 2090 | 241 | 192 | 280 | 15 | 30 | 7200 |
| ATV1200-A2910-6060••• | 2910 | 2433 | 280 | 224 | 280 | 15 | 30 | 7800 |
| ATV1200-A3130-6060••• | 3130 | 2617 | 301 | 241 | 320 | 15 | 30 | 8100 |
| ATV1200-A3325-6060••• | 3325 | 2780 | 320 | 256 | 320 | 15 | 30 | 10000 |
| ATV1200-A3500-6060••• | 3500 | 2926 | 337 | 269 | 410 | 15 | 30 | 10300 |
| ATV1200-A3940-6060••• | 3940 | 3294 | 379 | 303 | 410 | 15 | 30 | 10900 |
| ATV1200-A4260-6060••• | 4260 | 3561 | 410 | 328 | 410 | 15 | 30 | 11100 |
| ATV1200-A4470-6060••• | 4470 | 3737 | 430 | 344 | 490 | 15 | 30 | 11300 |
| ATV1200-A5100-6060••• | 5100 | 4264 | 490 | 392 | 490 | 15 | 30 | 12500 |
| ATV1200-A5720-6060••• | 5720 | 4782 | 550 | 440 | 550 | 15 | 30 | 15300 |
| ATV1200-A6350-6060••• | 6350 | 5309 | 611 | 489 | 720 | 15 | 30 | 15600 |
| ATV1200-A6860-6060••• | 6860 | 5735 | 660 | 528 | 720 | 15 | 30 | 16500 |
| ATV1200-A7500-6060••• | 7500 | 6270 | 720 | 576 | 720 | 15 | 30 | 18400 |
| ATV1200-A8110-6060••• | 8110 | 6780 | 780 | 624 | 850 | 15 | 30 | 19900 |
| ATV1200-A8840-6060••• | 8840 | 7390 | 850 | 680 | 850 | 15 | 30 | 20300 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

Selection and ordering
data

Altivar 1200
Medium Voltage Drive Systems
Output voltage 6.3 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|---------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 6.3 kV | | | | | | | | |
| ATV1200-A450-6363••• | 450 | 376 | 41 | 33 | 65 | 18 | 36 | 3100 |
| ATV1200-A530-6363••• | 530 | 443 | 49 | 39 | 65 | 18 | 36 | 3300 |
| ATV1200-A720-6363••• | 720 | 602 | 65 | 52 | 65 | 18 | 36 | 3500 |
| ATV1200-A820-6363••• | 820 | 686 | 75 | 60 | 100 | 18 | 36 | 3600 |
| ATV1200-A900-6363••• | 900 | 752 | 82 | 66 | 100 | 18 | 36 | 3800 |
| ATV1200-A1020-6363••• | 1020 | 853 | 94 | 75 | 100 | 18 | 36 | 4100 |
| ATV1200-A1100-6363••• | 1100 | 920 | 100 | 80 | 100 | 18 | 36 | 4200 |
| ATV1200-A1190-6363••• | 1190 | 995 | 109 | 87 | 135 | 18 | 36 | 5000 |
| ATV1200-A1480-6363••• | 1480 | 1237 | 135 | 108 | 135 | 18 | 36 | 5500 |
| ATV1200-A1640-6363••• | 1640 | 1371 | 150 | 120 | 150 | 18 | 36 | 5800 |
| ATV1200-A1970-6363••• | 1970 | 1647 | 180 | 144 | 200 | 18 | 36 | 7200 |
| ATV1200-A2190-6363••• | 2190 | 1831 | 200 | 160 | 200 | 18 | 36 | 7500 |
| ATV1200-A2400-6363••• | 2400 | 2006 | 220 | 176 | 220 | 18 | 36 | 7800 |
| ATV1200-A2670-6363••• | 2670 | 2232 | 245 | 196 | 280 | 18 | 36 | 8300 |
| ATV1200-A3050-6363••• | 3050 | 2550 | 280 | 224 | 280 | 18 | 36 | 8700 |
| ATV1200-A3490-6363••• | 3490 | 2918 | 320 | 256 | 320 | 18 | 36 | 11200 |
| ATV1200-A3760-6363••• | 3760 | 3143 | 345 | 276 | 410 | 18 | 36 | 11800 |
| ATV1200-A4240-6363••• | 4240 | 3545 | 388 | 311 | 410 | 18 | 36 | 12400 |
| ATV1200-A4470-6363••• | 4470 | 3737 | 410 | 328 | 410 | 18 | 36 | 12400 |
| ATV1200-A4770-6363••• | 4770 | 3988 | 437 | 350 | 490 | 18 | 36 | 13300 |
| ATV1200-A5350-6363••• | 5350 | 4473 | 490 | 392 | 490 | 18 | 36 | 13800 |
| ATV1200-A6000-6363••• | 6000 | 5016 | 550 | 440 | 550 | 18 | 36 | 16700 |
| ATV1200-A6660-6363••• | 6660 | 5568 | 612 | 490 | 720 | 18 | 36 | 18300 |
| ATV1200-A7200-6363••• | 7200 | 6019 | 660 | 528 | 720 | 18 | 36 | 19000 |
| ATV1200-A7860-6363••• | 7860 | 6571 | 720 | 576 | 720 | 18 | 36 | 20800 |
| ATV1200-A8550-6363••• | 8550 | 7148 | 783 | 626 | 850 | 18 | 36 | 21400 |
| ATV1200-A9300-6363••• | 9300 | 7775 | 850 | 680 | 850 | 18 | 36 | 22300 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

Selection and ordering
data

Altivar 1200
Medium Voltage Drive Systems
Output voltage 6.6 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|---------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 6.6 kV | | | | | | | | |
| ATV1200-A470-6666••• | 470 | 393 | 41 | 33 | 65 | 18 | 36 | 3100 |
| ATV1200-A560-6666••• | 560 | 468 | 49 | 39 | 65 | 18 | 36 | 3300 |
| ATV1200-A750-6666••• | 750 | 627 | 65 | 52 | 65 | 18 | 36 | 3500 |
| ATV1200-A860-6666••• | 860 | 719 | 75 | 60 | 100 | 18 | 36 | 3600 |
| ATV1200-A940-6666••• | 940 | 786 | 82 | 66 | 100 | 18 | 36 | 3800 |
| ATV1200-A1070-6666••• | 1070 | 895 | 94 | 75 | 100 | 18 | 36 | 4100 |
| ATV1200-A1150-6666••• | 1150 | 961 | 100 | 80 | 100 | 18 | 36 | 4200 |
| ATV1200-A1250-6666••• | 1250 | 1045 | 109 | 87 | 135 | 18 | 36 | 5000 |
| ATV1200-A1550-6666••• | 1550 | 1296 | 135 | 108 | 135 | 18 | 36 | 5500 |
| ATV1200-A1715-6666••• | 1715 | 1434 | 150 | 120 | 150 | 18 | 36 | 5800 |
| ATV1200-A2060-6666••• | 2060 | 1722 | 180 | 144 | 200 | 18 | 36 | 7200 |
| ATV1200-A2290-6666••• | 2290 | 1914 | 200 | 160 | 200 | 18 | 36 | 7500 |
| ATV1200-A2515-6666••• | 2515 | 2103 | 220 | 176 | 220 | 18 | 36 | 7800 |
| ATV1200-A2800-6666••• | 2800 | 2341 | 245 | 196 | 280 | 18 | 36 | 8300 |
| ATV1200-A3200-6666••• | 3200 | 2675 | 280 | 224 | 280 | 18 | 36 | 8700 |
| ATV1200-A3660-6666••• | 3660 | 3060 | 320 | 256 | 320 | 18 | 36 | 11200 |
| ATV1200-A3940-6666••• | 3940 | 3294 | 345 | 276 | 410 | 18 | 36 | 11800 |
| ATV1200-A4440-6666••• | 4440 | 3712 | 388 | 311 | 410 | 18 | 36 | 12400 |
| ATV1200-A4685-6666••• | 4685 | 3917 | 410 | 328 | 410 | 18 | 36 | 12400 |
| ATV1200-A5000-6666••• | 5000 | 4180 | 437 | 350 | 490 | 18 | 36 | 13300 |
| ATV1200-A5600-6666••• | 5600 | 4682 | 490 | 392 | 490 | 18 | 36 | 13800 |
| ATV1200-A6300-6666••• | 6300 | 5267 | 550 | 440 | 550 | 18 | 36 | 16700 |
| ATV1200-A7000-6666••• | 7000 | 5852 | 612 | 490 | 720 | 18 | 36 | 18300 |
| ATV1200-A7550-6666••• | 7550 | 6312 | 660 | 528 | 720 | 18 | 36 | 19000 |
| ATV1200-A8250-6666••• | 8250 | 6897 | 720 | 576 | 720 | 18 | 36 | 20800 |
| ATV1200-A8950-6666••• | 8950 | 7482 | 783 | 626 | 850 | 18 | 36 | 21400 |
| ATV1200-A9750-6666••• | 9750 | 8151 | 850 | 680 | 850 | 18 | 36 | 22300 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.

4)... Values valid only for standard efficiency.

Altivar 1200
Medium Voltage Drive Systems
Output voltage 10 kV

| Model ¹⁾ | Type rating ²⁾ [kVA] | Motor power ³⁾ [kW] | Nominal Continuous current [A] | | Power cell current [A] | Number of Power cells | Number of Input Pulses | Weight ⁴⁾ [kg] |
|-----------------------------|------------------------------------|-----------------------------------|--------------------------------|--------------------|------------------------|-----------------------|------------------------|------------------------------|
| | | | Standard overload 120% | High overload 150% | | | | |
| Voltage class: 10 kV | | | | | | | | |
| ATV1200-A470-1010••• | 470 | 393 | 27 | 22 | 35 | 24 | 48 | 4100 |
| ATV1200-A610-1010••• | 610 | 510 | 35 | 28 | 35 | 24 | 48 | 4300 |
| ATV1200-A700-1010••• | 700 | 585 | 40 | 32 | 65 | 24 | 48 | 4400 |
| ATV1200-A790-1010••• | 790 | 660 | 46 | 36 | 65 | 24 | 48 | 4500 |
| ATV1200-A940-1010••• | 940 | 786 | 54 | 43 | 65 | 24 | 48 | 4700 |
| ATV1200-A1070-1010••• | 1070 | 895 | 62 | 49 | 65 | 24 | 48 | 4900 |
| ATV1200-A1130-1010••• | 1130 | 945 | 65 | 52 | 65 | 24 | 48 | 5000 |
| ATV1200-A1250-1010••• | 1250 | 1045 | 72 | 58 | 100 | 24 | 48 | 5100 |
| ATV1200-A1570-1010••• | 1570 | 1313 | 91 | 73 | 100 | 24 | 48 | 5500 |
| ATV1200-A1730-1010••• | 1730 | 1446 | 100 | 80 | 100 | 24 | 48 | 5700 |
| ATV1200-A2000-1010••• | 2000 | 1672 | 115 | 92 | 135 | 24 | 48 | 6900 |
| ATV1200-A2340-1010••• | 2340 | 1956 | 135 | 108 | 135 | 24 | 48 | 7300 |
| ATV1200-A2600-1010••• | 2600 | 2174 | 150 | 120 | 150 | 24 | 48 | 7900 |
| ATV1200-A2800-1010••• | 2800 | 2341 | 162 | 129 | 200 | 24 | 48 | 9100 |
| ATV1200-A3130-1010••• | 3130 | 2617 | 181 | 145 | 200 | 24 | 48 | 9400 |
| ATV1200-A3470-1010••• | 3470 | 2901 | 200 | 160 | 200 | 24 | 48 | 9900 |
| ATV1200-A3810-1010••• | 3810 | 3185 | 220 | 176 | 220 | 24 | 48 | 10300 |
| ATV1200-A4440-1010••• | 4440 | 3712 | 256 | 205 | 280 | 24 | 48 | 11500 |
| ATV1200-A4850-1010••• | 4850 | 4055 | 280 | 224 | 280 | 24 | 48 | 12000 |
| ATV1200-A5000-1010••• | 5000 | 4180 | 289 | 231 | 320 | 24 | 48 | 14800 |
| ATV1200-A5540-1010••• | 5540 | 4631 | 320 | 256 | 320 | 24 | 48 | 15200 |
| ATV1200-A6250-1010••• | 6250 | 5225 | 361 | 289 | 410 | 24 | 48 | 16700 |
| ATV1200-A7100-1010••• | 7100 | 5936 | 410 | 328 | 410 | 24 | 48 | 18300 |
| ATV1200-A7900-1010••• | 7900 | 6604 | 456 | 365 | 490 | 24 | 48 | 20100 |
| ATV1200-A8500-1010••• | 8500 | 7106 | 490 | 392 | 490 | 24 | 48 | 20100 |
| ATV1200-A9530-1010••• | 9530 | 7967 | 550 | 440 | 550 | 24 | 48 | 26200 |
| ATV1200-A10600-1010••• | 10600 | 8862 | 612 | 490 | 720 | 24 | 48 | 26700 |
| ATV1200-A11500-1010••• | 11500 | 9614 | 664 | 531 | 720 | 24 | 48 | 28400 |
| ATV1200-A12500-1010••• | 12500 | 10450 | 720 | 576 | 720 | 24 | 48 | 30400 |
| ATV1200-A13500-1010••• | 13500 | 11286 | 779 | 624 | 850 | 24 | 48 | 32000 |
| ATV1200-A14750-1010••• | 14750 | 12331 | 850 | 680 | 850 | 24 | 48 | 37400 |

1)... Please contact Schneider Electric for other combinations of input and output voltage.

2)... For higher drive capacity please contact Schneider Electric.

3)... Values are calculated with a power factor of 0.88 and efficiency of 95%. The real value must come from the used equipment.


4)... Values valid only for standard efficiency.

General technical data



| General technical data | |
|---|---|
| Input | 18-54 pulse diode rectifier bridge |
| Output | Multilevel PWM with 2 level low-voltage IGBT inverter cells |
| Input voltage | <ul style="list-style-type: none"> ■ 2.4kV, 3.0kV, 3.3kV, 4.16kV, 5.5kV, 6.0kV, 6.3kV, 6.6kV, 6.9kV, 10kV, 11kV, 13.8 kV ■ Variation: standard±10% |
| Allowable voltage fluctuation | The drive is subject to de-rating operation when the voltage drop of power supply is within -25% |
| Input frequency | 50/60 Hz ±5% |
| Acceleration / deceleration time | 0-3200 s |
| Overload capability | <ul style="list-style-type: none"> ■ Standard overload 120% 60s/10 min and 150% 3s/10 min, instant trip threshold 200% ■ High overload 150% 60s/10 min, 185% 3s/10 min, instant trip threshold 250% |
| Total harmonics THD(i) | Comply with the requirements of power quality standard of IEEE519-1992 |
| Frequency resolution | 0.01 Hz |
| Trigger signal transmission | Fiber optic transmission |
| Input power factor | ≥ 0.96 from 20 % to 100 % of speed |
| Efficiency at rated power | The efficiency of the drive including input transformer 96% or over 96.5% depending on product Inverter efficiency without transformer is 98.5% |
| Type of motor | Asynchronous motor, synchronous motor |
| Three-phase output voltage for motor connection | 0...2400V - 0...3000V - 0...3300V - 0...4160V - 0...5500V - 0...6000V 0...6300V - 0...6600V - 0...6900V - 0...10000V - 0...11000V |
| Output frequency | 120Hz for V/f, 70Hz for Vector Control |
| Input transformer | Indoor type integrated in the frequency variable device, the dry phase-shifting transformer can be supplied with 18 – 54 pulse rectifier |
| Control power supply | 220 VAC, 3 kVA capacity, other voltage on request, with UPS 30 min autonomy |
| Protection class | <ul style="list-style-type: none"> ■ Standard: IP31 ■ Option: IP41, IP42 |
| Cooling fan power supply | Internal from the drive transformer secondary (does not require additional auxiliary supply) |
| Paint | RAL 7032 |
| Cooling | Forced air ventilation |
| Reference standard | IEC EN 61800-3, IEC EN 61800-4, IEC EN 61800-5-1, IEC EN 60204-11, IEC EN 60529, IEEE 519 and other optional ones |
| Environment features | |
| Storage temperature | -10°C to 60°C |
| Working temperature | 0-40°C, up to 50°C possible with derating |
| Cooling method | Forced air cooling |
| Relative humidity | 90% (without condensate), Optional: maximum up to 95% |
| Altitude | ≤ 1000 m without derating. With derating of 0.6% every 100m up to 2000 meters, can be customized for high altitude |
| Vibration | Acceleration: 4.9 m/s ² acceptable (10-50 Hz) |
| Noise level | ≤ 80 dB (A) (including the noise of the cooling fans on the cabinet top) |
| Pollution Degree | Degree 2 of IEC61800 (Adjustable speed electrical power drive systems – Part 5-1:Safety requirements –Electrical, thermal and energy) |
| Over Voltage Category | Category II of IEC61800 (Adjustable speed electrical power drive systems – Part 5-1:Safety requirements –Electrical, thermal and energy) |

Altivar 1200

Medium Voltage Drive Systems

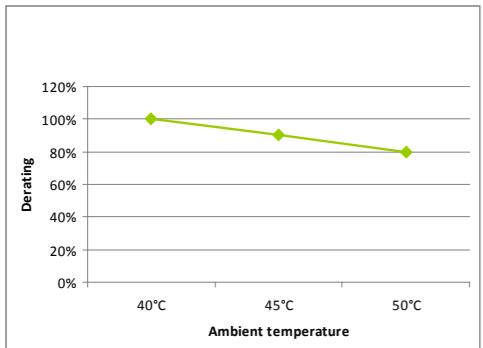

Derating at higher ambient temperature

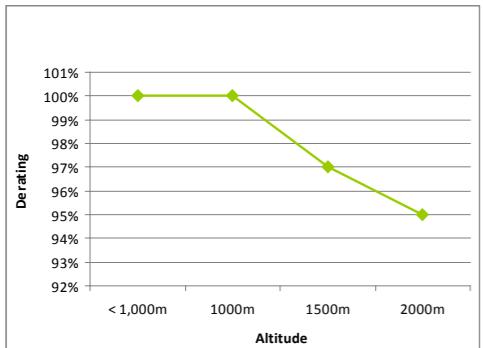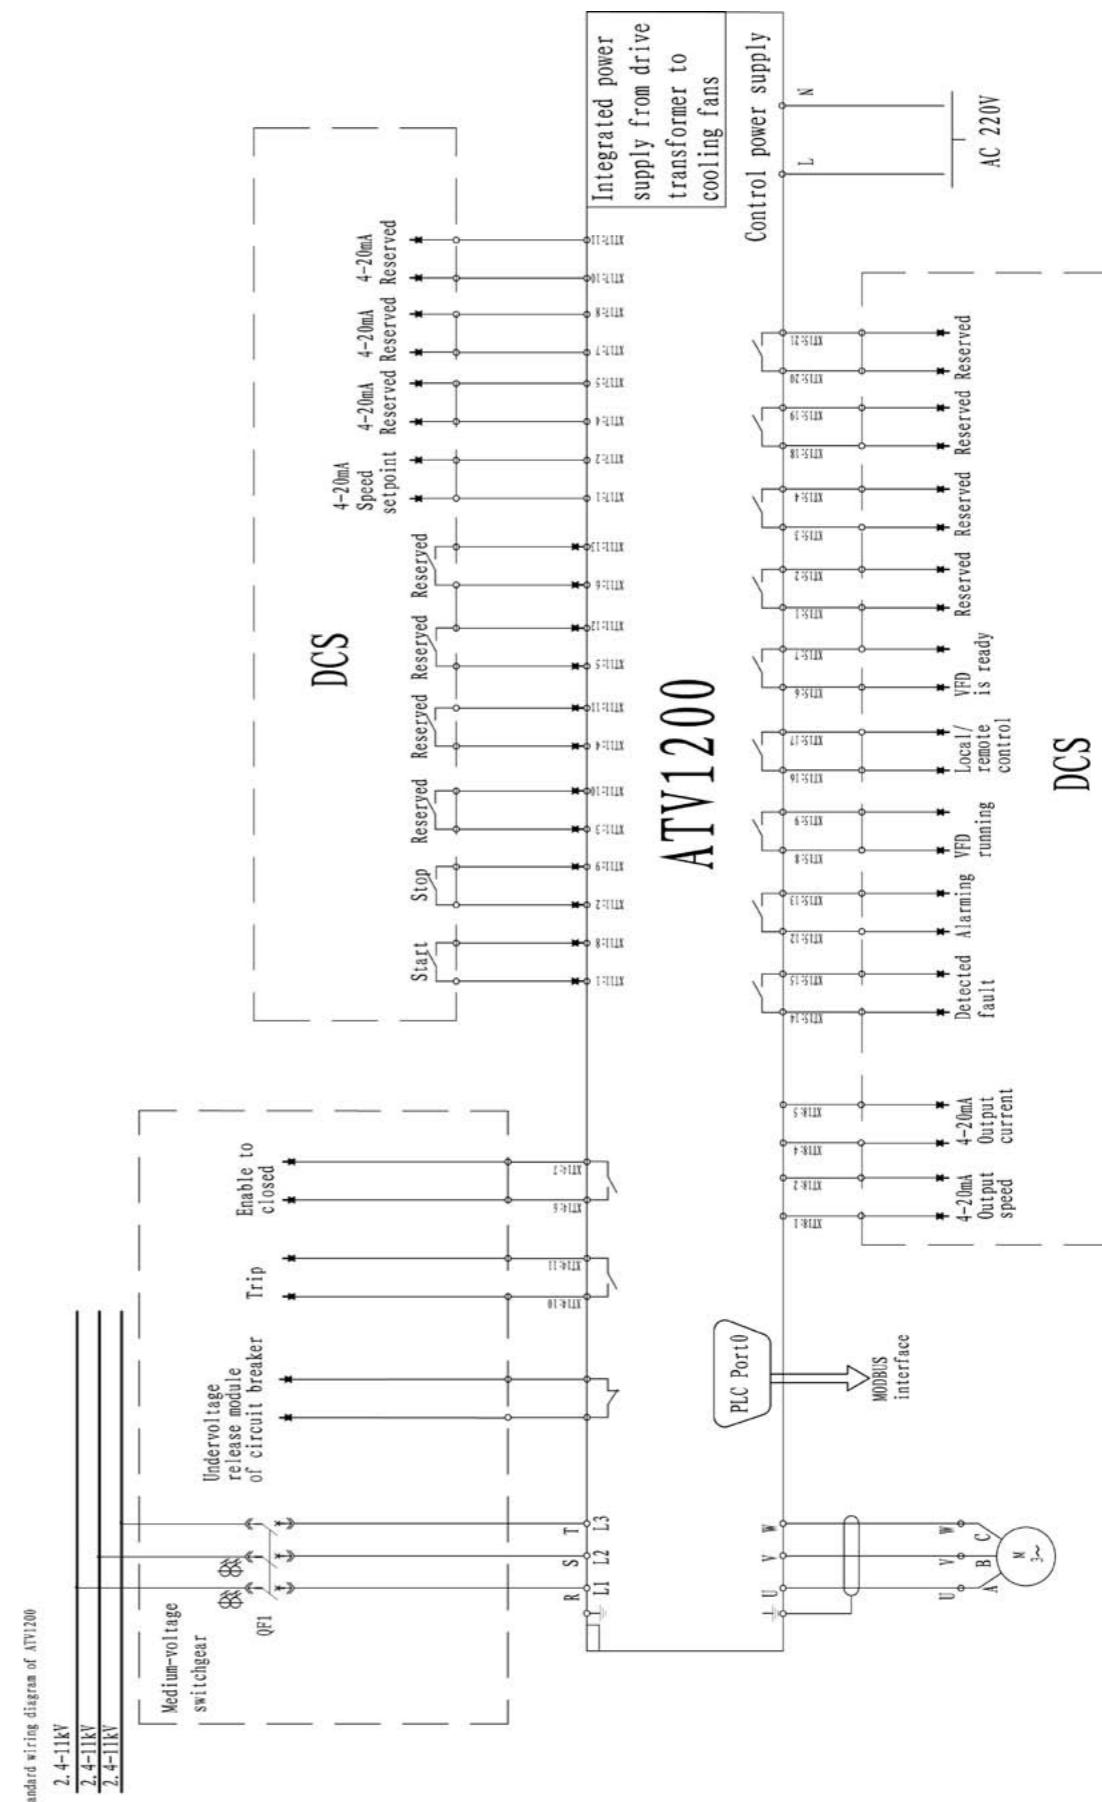Derating at higher altitude
(Above 2000 m on request)

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A370-3333••• | A470-3333••• | A570-3333••• |
| Nominal data | | | |
| Type rating [kVA] | 370 | 470 | 570 |
| Motor power [kW] | 309 | 393 | 477 |
| Continuous output current [A] | | | |
| With 120 % overload | 65 | 82 | 100 |
| With 150 % overload | 52 | 66 | 80 |
| Max. output current [A] | | | |
| 1 min/10 min | 78 | 98 | 120 |
| Power cells | | | |
| Number of cells per phase | 3 | 3 | 3 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 12 (incl. fan power) | ≤ 16 (incl. fan power) | ≤ 19 (incl. fan power) |
| High efficiency | ≤ 11 (incl. fan power) | ≤ 14 (incl. fan power) | ≤ 17 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 9900 | 9900 | 9900 |
| High efficiency | 13200 | 13200 | 13200 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 2200 | 2400 | 2600 |
| High efficiency | 3300 | 3500 | 3800 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 2460x1400x2520 | 2460x1400x2520 | 2460x1400x2520 |
| High efficiency | 2760x1500x2670 | 2760x1500x2670 | 2760x1500x2670 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

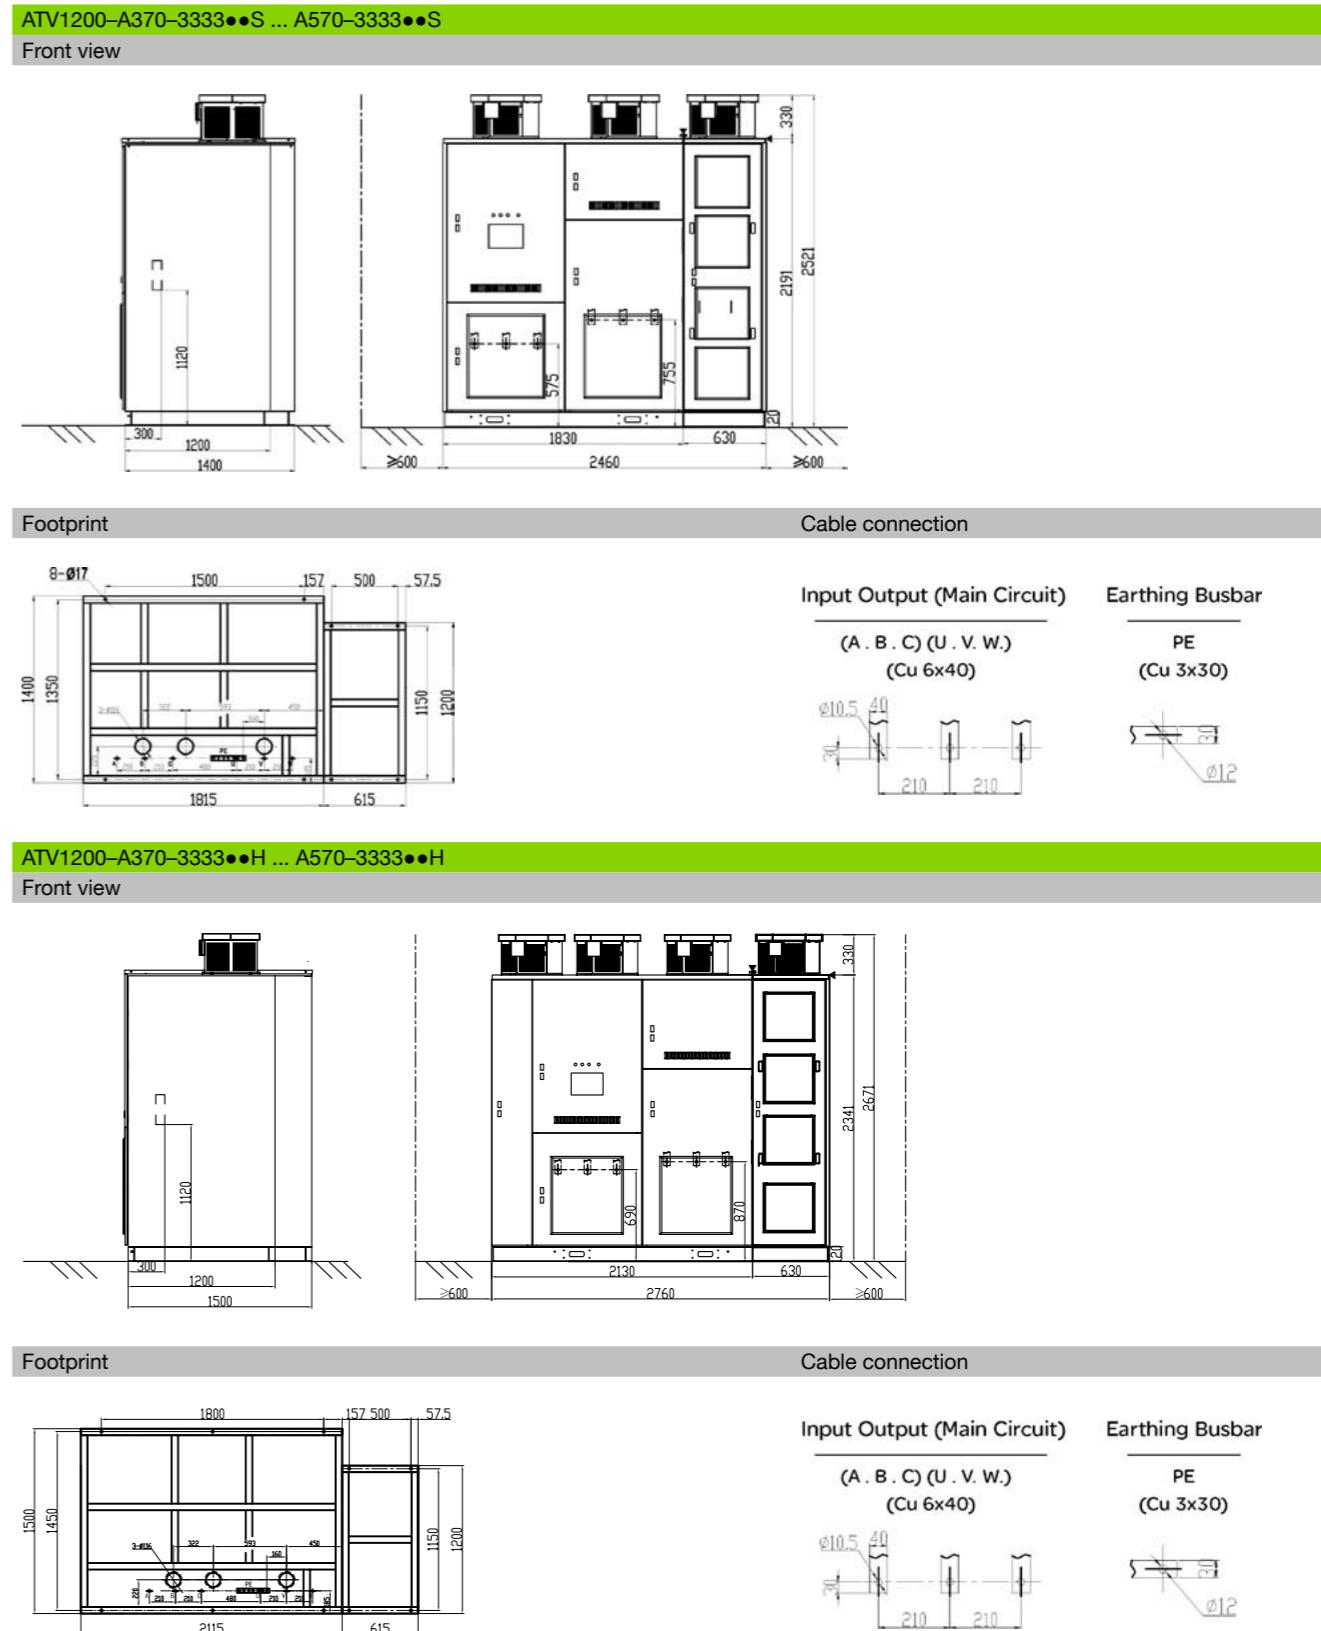

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A660-3333••• |
| Nominal data | |
| Type rating [kVA] | 660 |
| Motor power [kW] | 552 |
| Continuous output current [A] | |
| With 120 % overload | 116 |
| With 150 % overload | 93 |
| Max. output current [A] | |
| 1 min/10 min | 139 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 22 (incl. fan power) |
| High efficiency | ≤ 19 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 9900 |
| High efficiency | 13200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3200 |
| High efficiency | 4100 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 2760x1400x2520 |
| High efficiency | 3060x1500x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

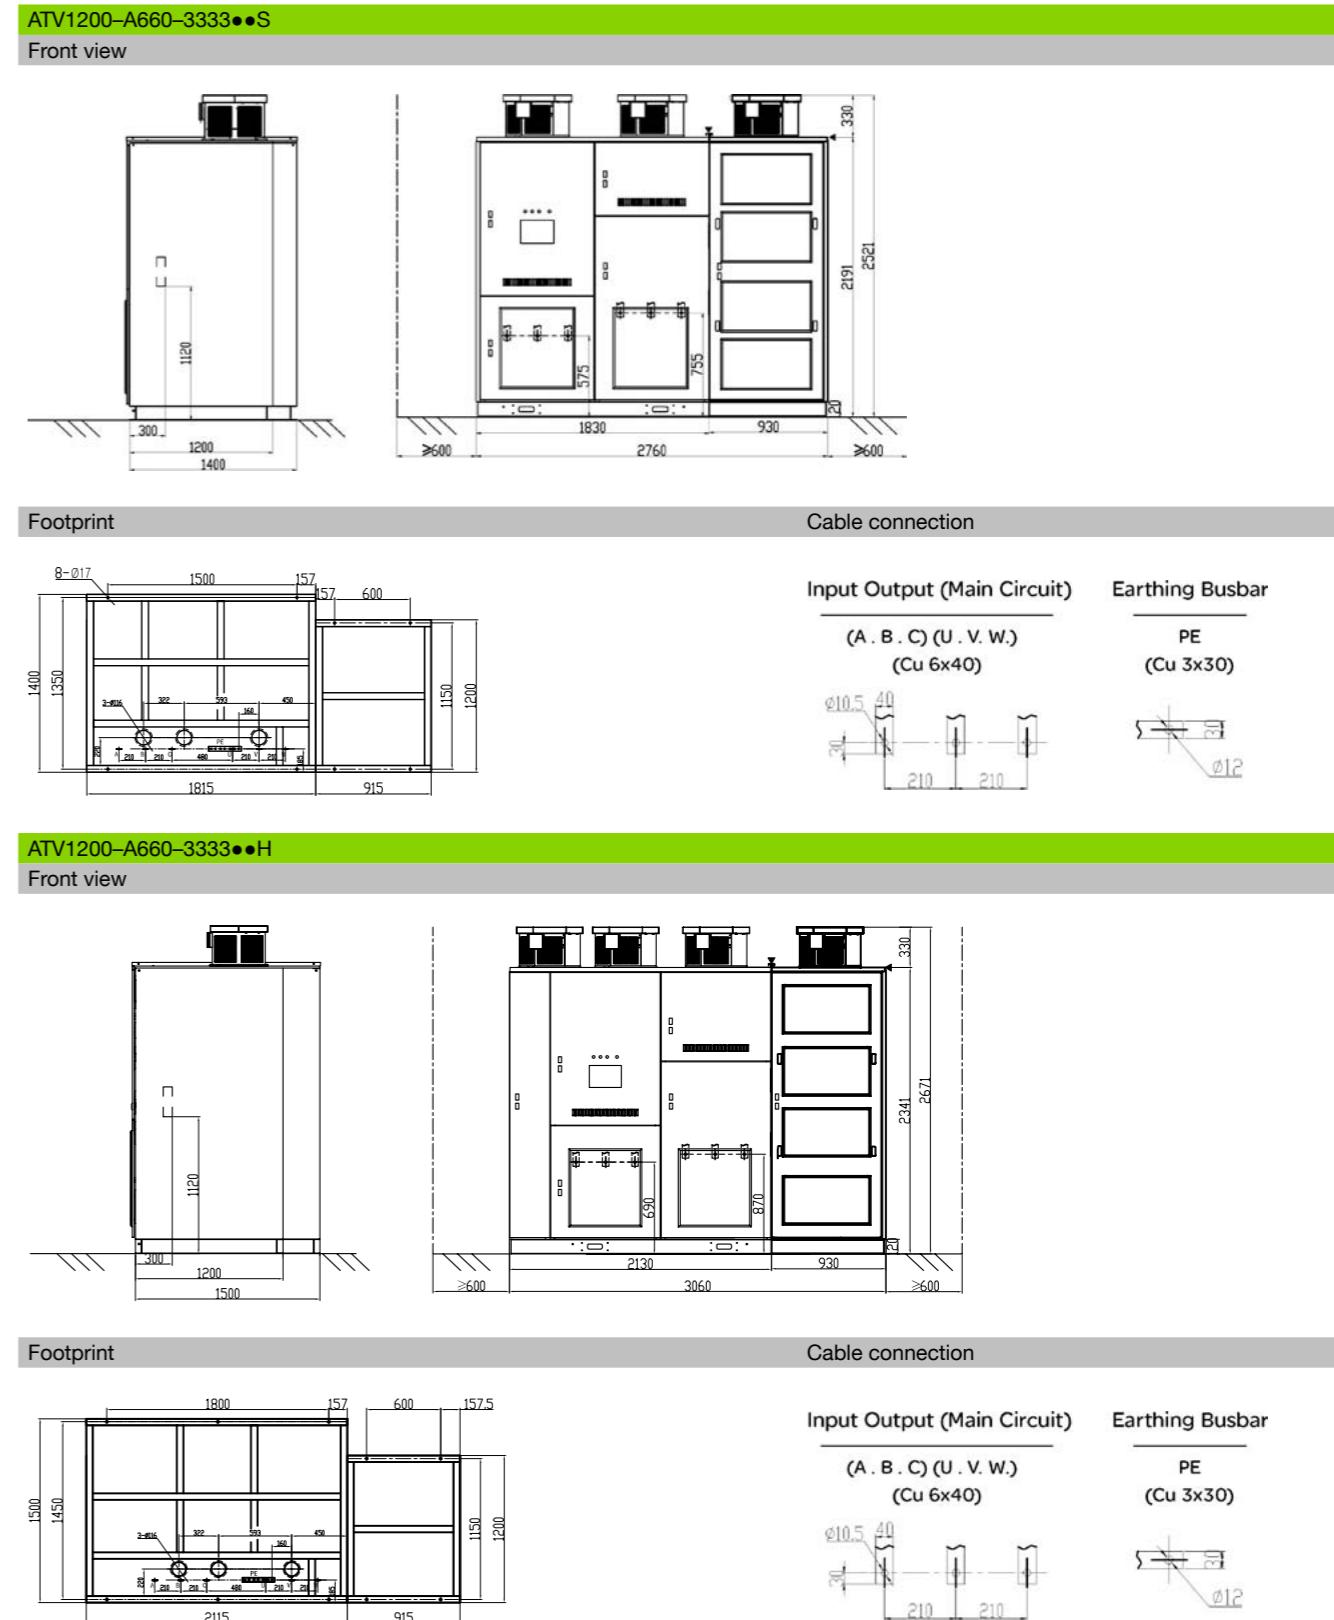

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A770-3333••• |
| Nominal data | |
| Type rating [kVA] | 770 |
| Motor power [kW] | 644 |
| Continuous output current [A] | |
| With 120 % overload | 135 |
| With 150 % overload | 108 |
| Max. output current [A] | |
| 1 min/10 min | 162 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 26 (incl. fan power) |
| High efficiency | ≤ 23 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 9900 |
| High efficiency | 16500 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3200 |
| High efficiency | 4400 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 2760x1400x2520 |
| High efficiency | 3360x1500x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

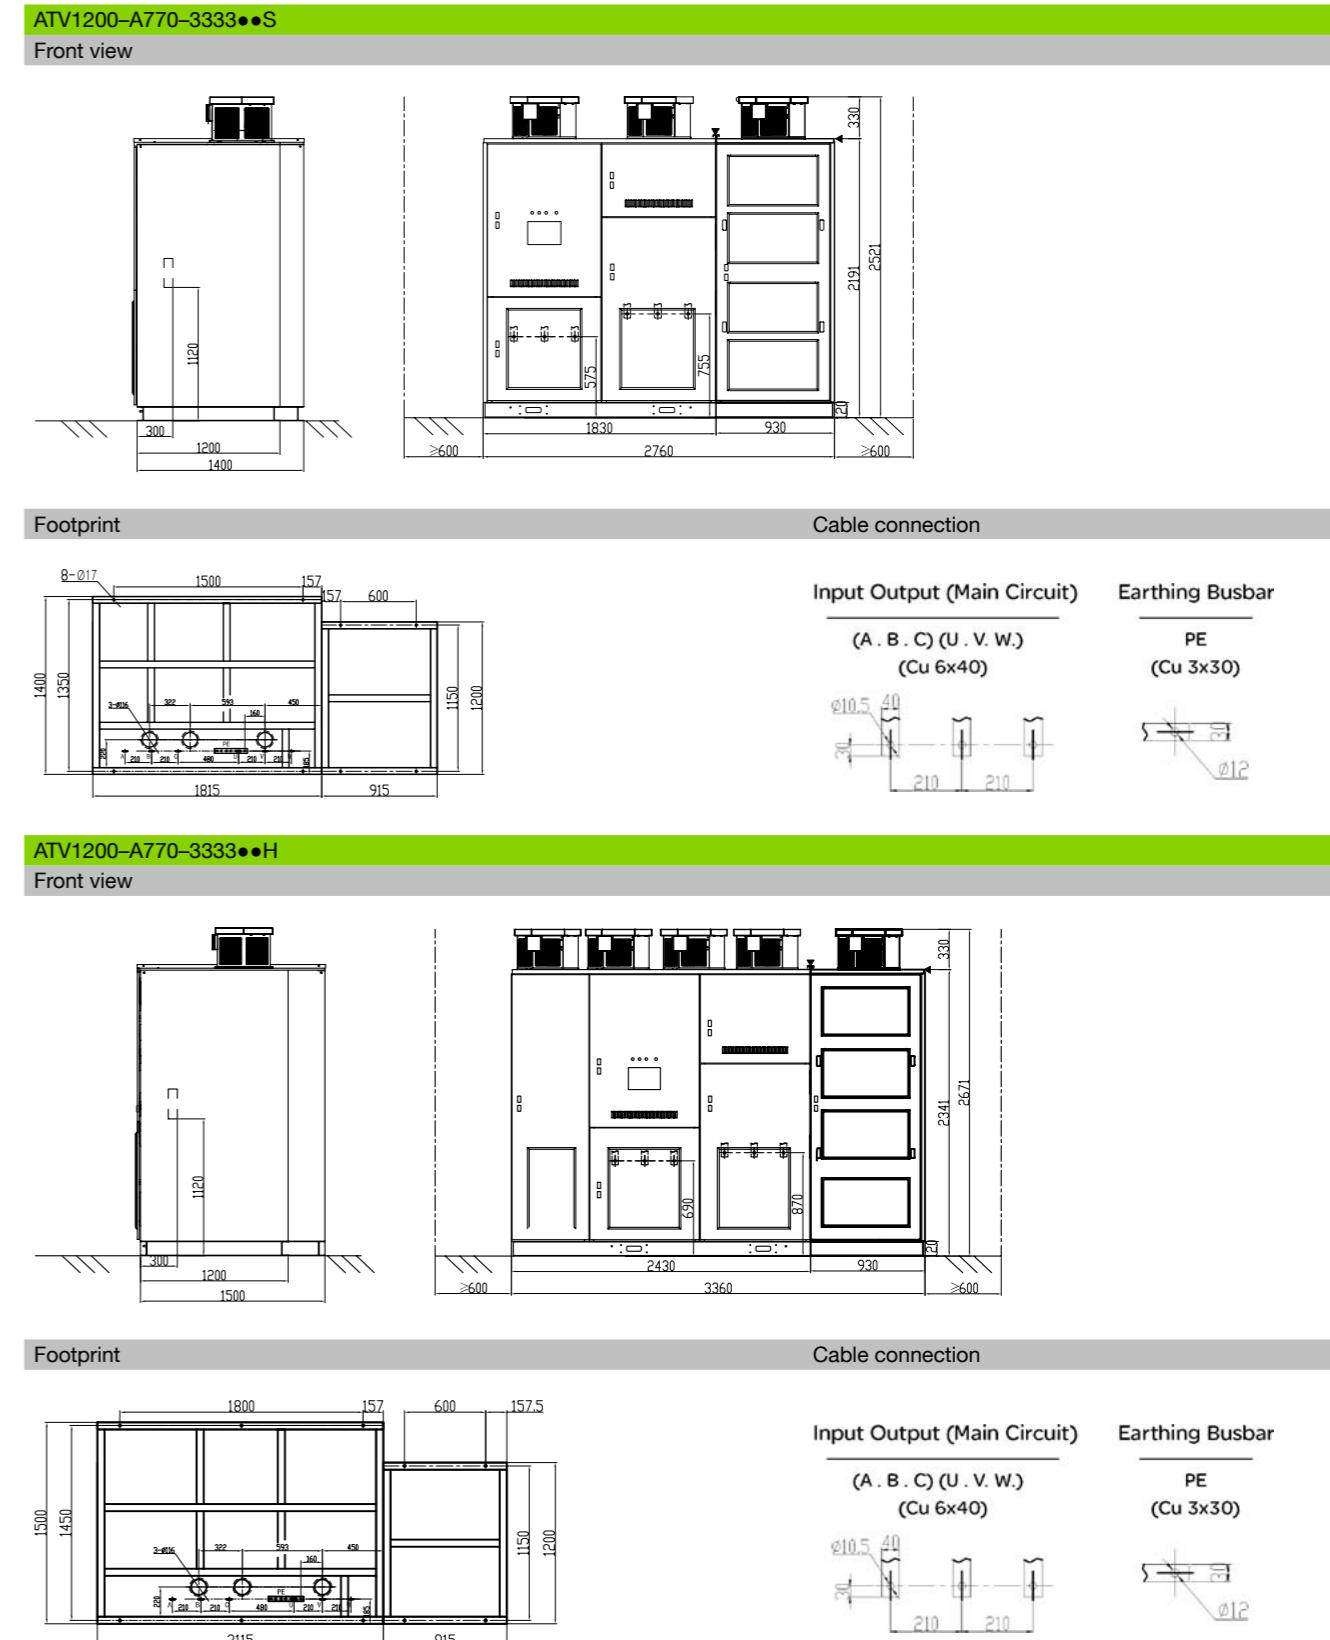

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A860-3333••• |
| Nominal data | |
| Type rating [kVA] | 860 |
| Motor power [kW] | 719 |
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 29 (incl. fan power) |
| High efficiency | ≤ 25 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 16600 |
| High efficiency | 23200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3400 |
| High efficiency | 4500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 2760x1400x2590 |
| High efficiency | 3360x1500x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

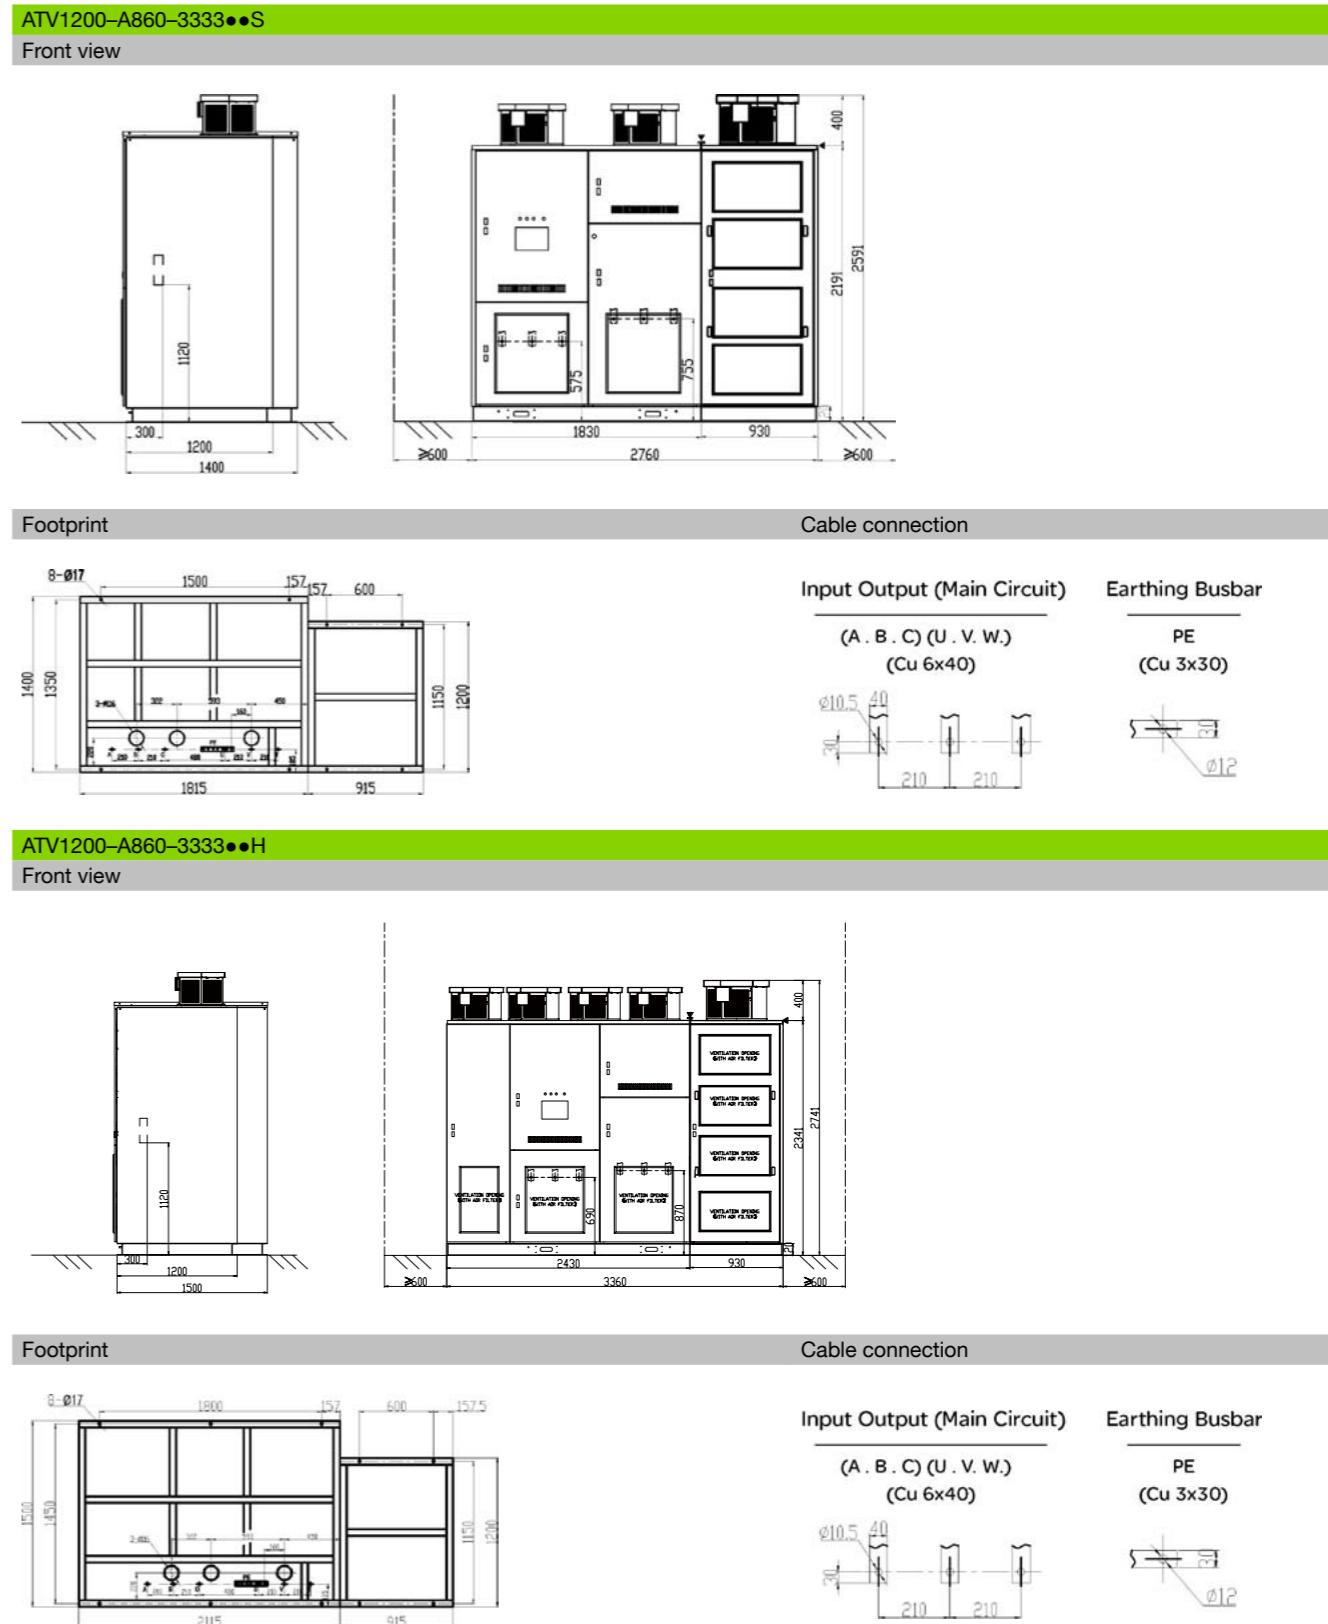

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A1000-3333••• |
| Nominal data | |
| Type rating [kVA] | 1000 |
| Motor power [kW] | 836 |
| Continuous output current [A] | |
| With 120 % overload | 175 |
| With 150 % overload | 140 |
| Max. output current [A] | |
| 1 min/10 min | 210 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 33 (incl. fan power) |
| High efficiency | ≤ 29 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 13200 |
| High efficiency | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 4300 |
| High efficiency | 5200 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3560x1400x2670 |
| High efficiency | 3860x1500x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

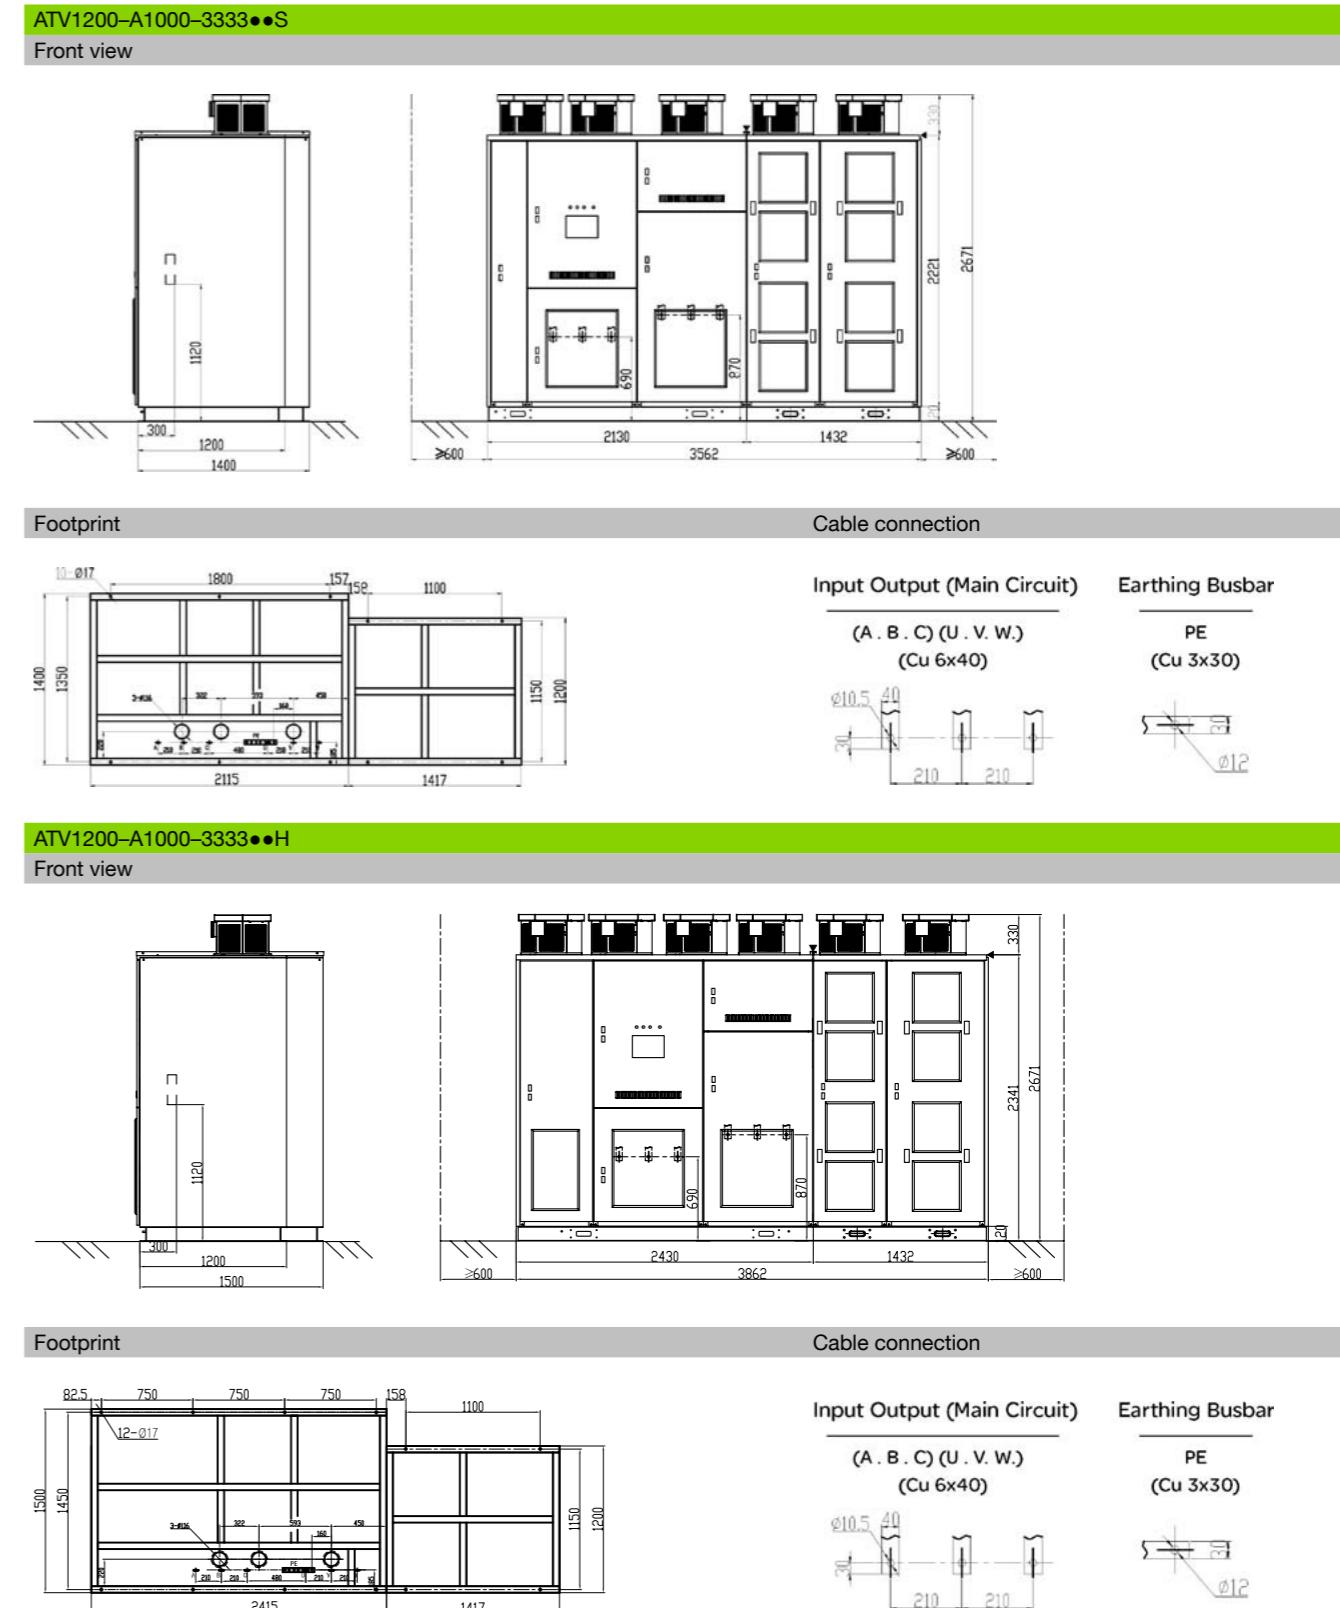

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

Technical data for output voltage 3.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1140-3333••• | A1250-3333••• |
| Nominal data | | |
| Type rating [kVA] | 1140 | 1250 |
| Motor power [kW] | 953 | 1045 |
| Continuous output current [A] | | |
| With 120 % overload | 200 | 220 |
| With 150 % overload | 160 | 176 |
| Max. output current [A] | | |
| 1 min/10 min | 240 | 264 |
| Power cells | | |
| Number of cells per phase | 3 | 3 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 38 (incl. fan power) | ≤ 42 (incl. fan power) |
| High efficiency | ≤ 33 (incl. fan power) | ≤ 37 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 4600 | 4700 |
| High efficiency | 5500 | 5800 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3560x1400x2670 | 3560x1400x2670 |
| High efficiency | 3860x1600x2670 | 3860x1600x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 3.3 kV

ATV1200-A1140-3333••S ... A1250-3333••S



Front view

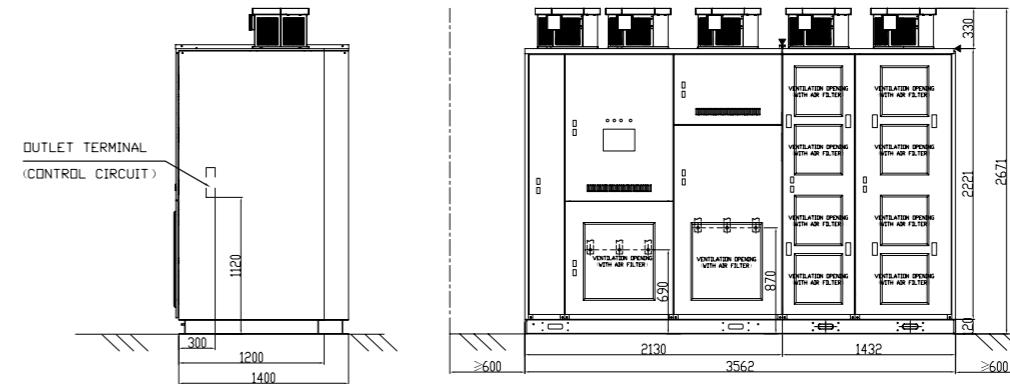

Footprint

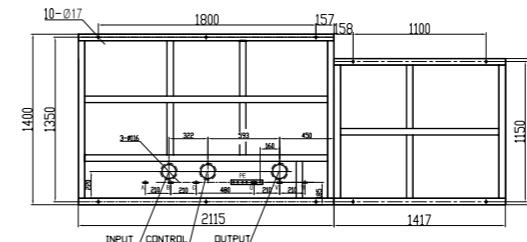


Cable connection




ATV1200-A1140-3333••H ... A1250-3333••H



Front view

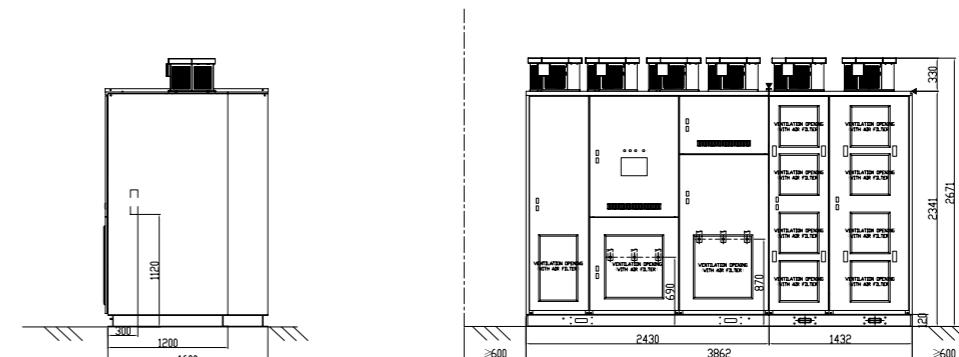

Footprint

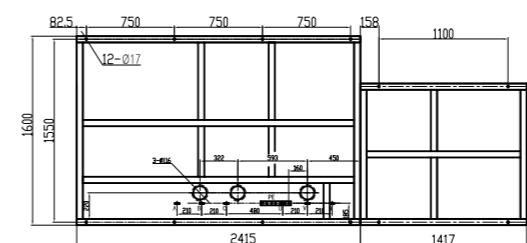

Cable connection



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A1400-3333••• |
| Nominal data | |
| Type rating [kVA] | 1400 |
| Motor power [kW] | 1170 |
| Continuous output current [A] | |
| With 120 % overload | 245 |
| With 150 % overload | 196 |
| Max. output current [A] | |
| 1 min/10 min | 294 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 47 (incl. fan power) |
| High efficiency | ≤ 41 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5000 |
| High efficiency | 6100 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3560x1400x2820 |
| High efficiency | 3860x1600x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A1600-3333••• |
| Nominal data | |
| Type rating [kVA] | 1600 |
| Motor power [kW] | 1338 |
| Continuous output current [A] | |
| With 120 % overload | 280 |
| With 150 % overload | 224 |
| Max. output current [A] | |
| 1 min/10 min | 336 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 54 (incl. fan power) |
| High efficiency | ≤ 47 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5400 |
| High efficiency | 6200 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3560x1500x2820 |
| High efficiency | 3860x1600x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

Technical data for output voltage 3.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1830-3333••• | A2000-3333••• |
| Nominal data | | |
| Type rating [kVA] | 1830 | 2000 |
| Motor power [kW] | 1530 | 1672 |
| Continuous output current [A] | | |
| With 120 % overload | 320 | 350 |
| With 150 % overload | 256 | 280 |
| Max. output current [A] | | |
| 1 min/10 min | 384 | 420 |
| Power cells | | |
| Number of cells per phase | 3 | 3 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 61 (incl. fan power) | ≤ 67 (incl. fan power) |
| High efficiency | ≤ 54 (incl. fan power) | ≤ 59 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 19800 | 19800 |
| High efficiency | 23100 | 23100 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 6400 | 6500 |
| High efficiency | 7500 | 7700 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 4560x1500x2670 | 4560x1500x2670 |
| High efficiency | 4860x1700x2670 | 4860x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 3.3 kV

ATV1200-A1830-3333••S ... A2000-3333••S


Front view

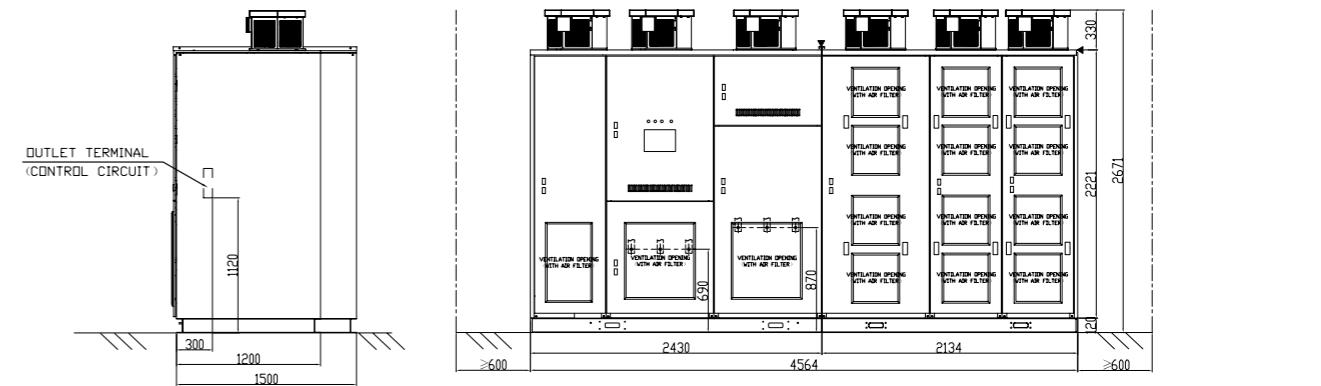

Footprint

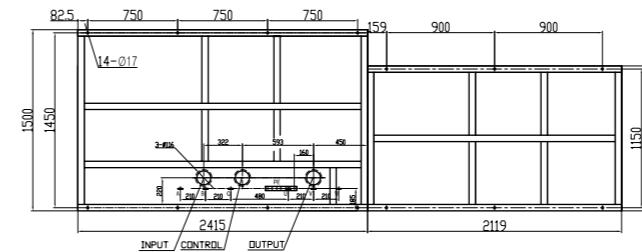


Cable connection

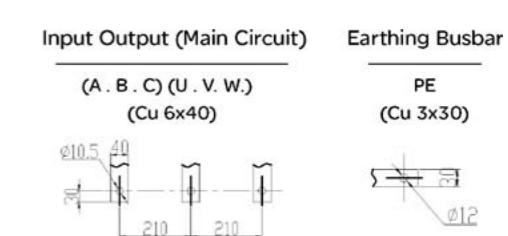


ATV1200-A1830-3333••H ... A2000-3333••H


Front view

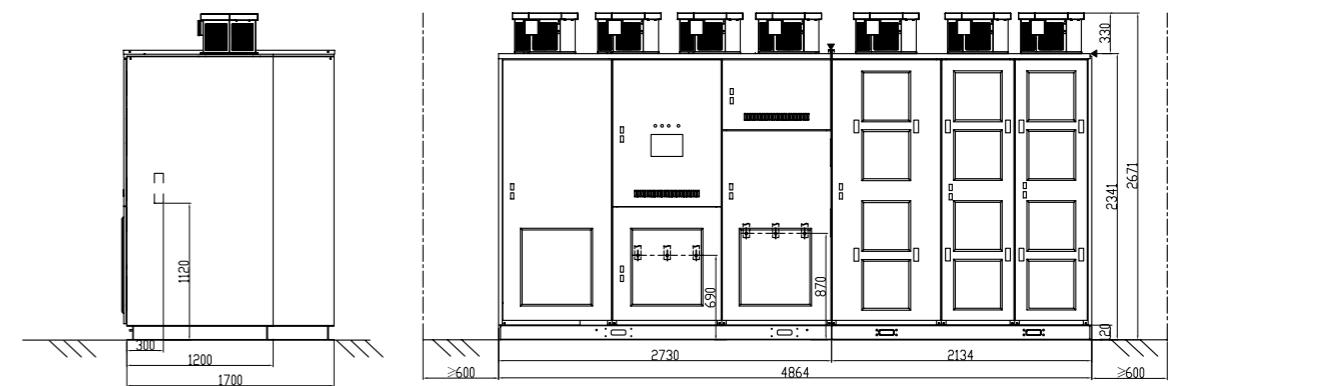

Footprint

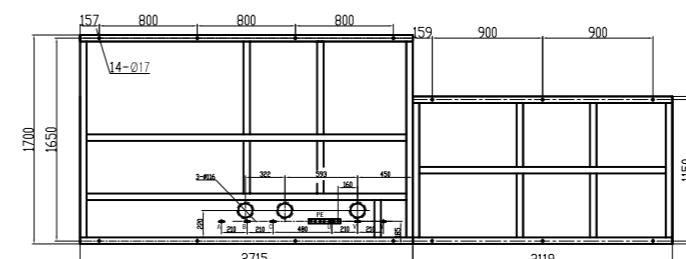

Cable connection

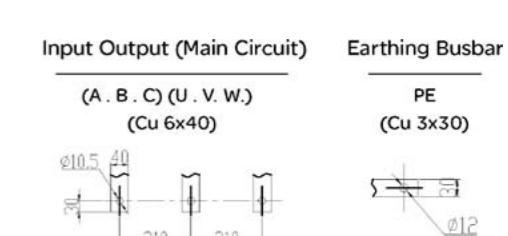

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A2340-3333••• |
| Nominal data | |
| Type rating [kVA] | 2340 |
| Motor power [kW] | 1956 |
| Continuous output current [A] | |
| With 120 % overload | 410 |
| With 150 % overload | 328 |
| Max. output current [A] | |
| 1 min/10 min | 492 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 78 (incl. fan power) |
| High efficiency | ≤ 68 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 23100 |
| High efficiency | 23100 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 7100 |
| High efficiency | 8200 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4560x1600x2670 |
| High efficiency | 4860x1700x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

| Technical data for output voltage 3.3 kV | |
|--|-----------------------------|
| ATV1200 | A2800-3333••• |
| Nominal data | |
| Type rating [kVA] | 2800 |
| Motor power [kW] | 2341 |
| Continuous output current [A] | |
| With 120 % overload | 490 |
| With 150 % overload | 392 |
| Max. output current [A] | |
| 1 min/10 min | 588 |
| Power cells | |
| Number of cells per phase | 3 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 94 (incl. fan power) |
| High efficiency | ≤ 82 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 33200 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 7800 |
| High efficiency | 9100 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4560x1600x2820 |
| High efficiency | 4860x1700x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A3150-3333••• | A3500-3333••• | A3780-3333••• |
| Nominal data | | | |
| Type rating [kVA] | 3150 | 3500 | 3780 |
| Motor power [kW] | 2633 | 2926 | 3160 |
| Continuous output current [A] | | | |
| With 120 % overload | 550 | 612 | 661 |
| With 150 % overload | 440 | 490 | 529 |
| Max. output current [A] | | | |
| 1 min/10 min | 660 | 735 | 794 |
| Power cells | | | |
| Number of cells per phase | 3 | 3 | 3 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.1 (incl. fan power) | ≥ 96.2 (incl. fan power) | ≥ 96.2 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 103 (incl. fan power) | ≤ 111 (incl. fan power) | ≤ 120 (incl. fan power) |
| High efficiency | ≤ 92 (incl. fan power) | ≤ 102 (incl. fan power) | ≤ 111 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 60000 | 60000 | 60000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 9800 | 10200 | 10600 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 5870x1700x2740 | 5870x1700x2740 | 5870x1700x2740 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

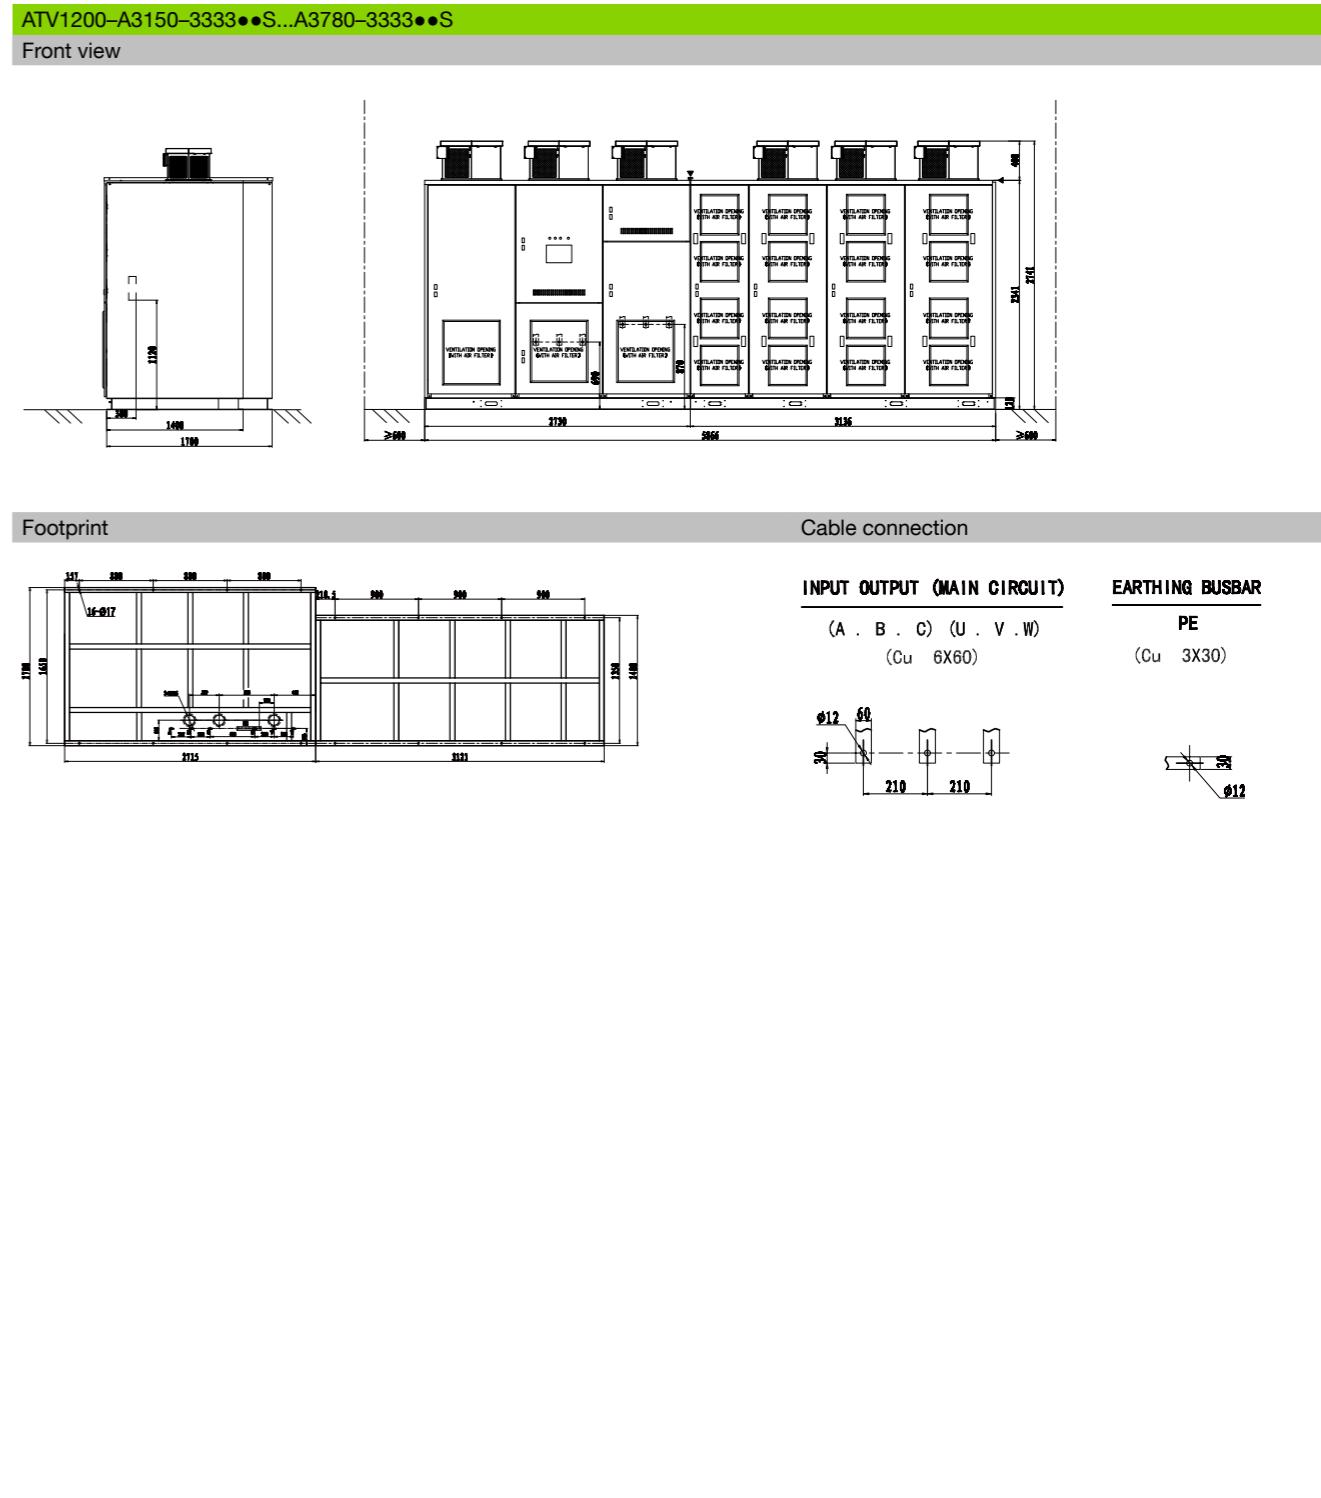

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV


| Technical data for output voltage 3.3 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A4120-3333••• | A4460-3333••• | A4860-3333••• |
| Nominal data | | | |
| Type rating [kVA] | 4120 | 4460 | 4860 |
| Motor power [kW] | 3444 | 3729 | 4063 |
| Continuous output current [A] | | | |
| With 120 % overload | 720 | 780 | 850 |
| With 150 % overload | 576 | 624 | 680 |
| Max. output current [A] | | | |
| 1 min/10 min | 864 | 936 | 1020 |
| Power cells | | | |
| Number of cells per phase | 3 | 3 | 3 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.3 (incl. fan power) | ≥ 96.3 (incl. fan power) | ≥ 96.4 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 127 (incl. fan power) | ≤ 138 (incl. fan power) | ≤ 146 (incl. fan power) |
| High efficiency | ≤ 121 (incl. fan power) | ≤ 130 (incl. fan power) | ≤ 142 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 60000 | 60000 | 60000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 11100 | 11800 | 12400 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 5870x1700x2740 | 5870x1700x2740 | 5870x1700x2740 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 3.3 kV

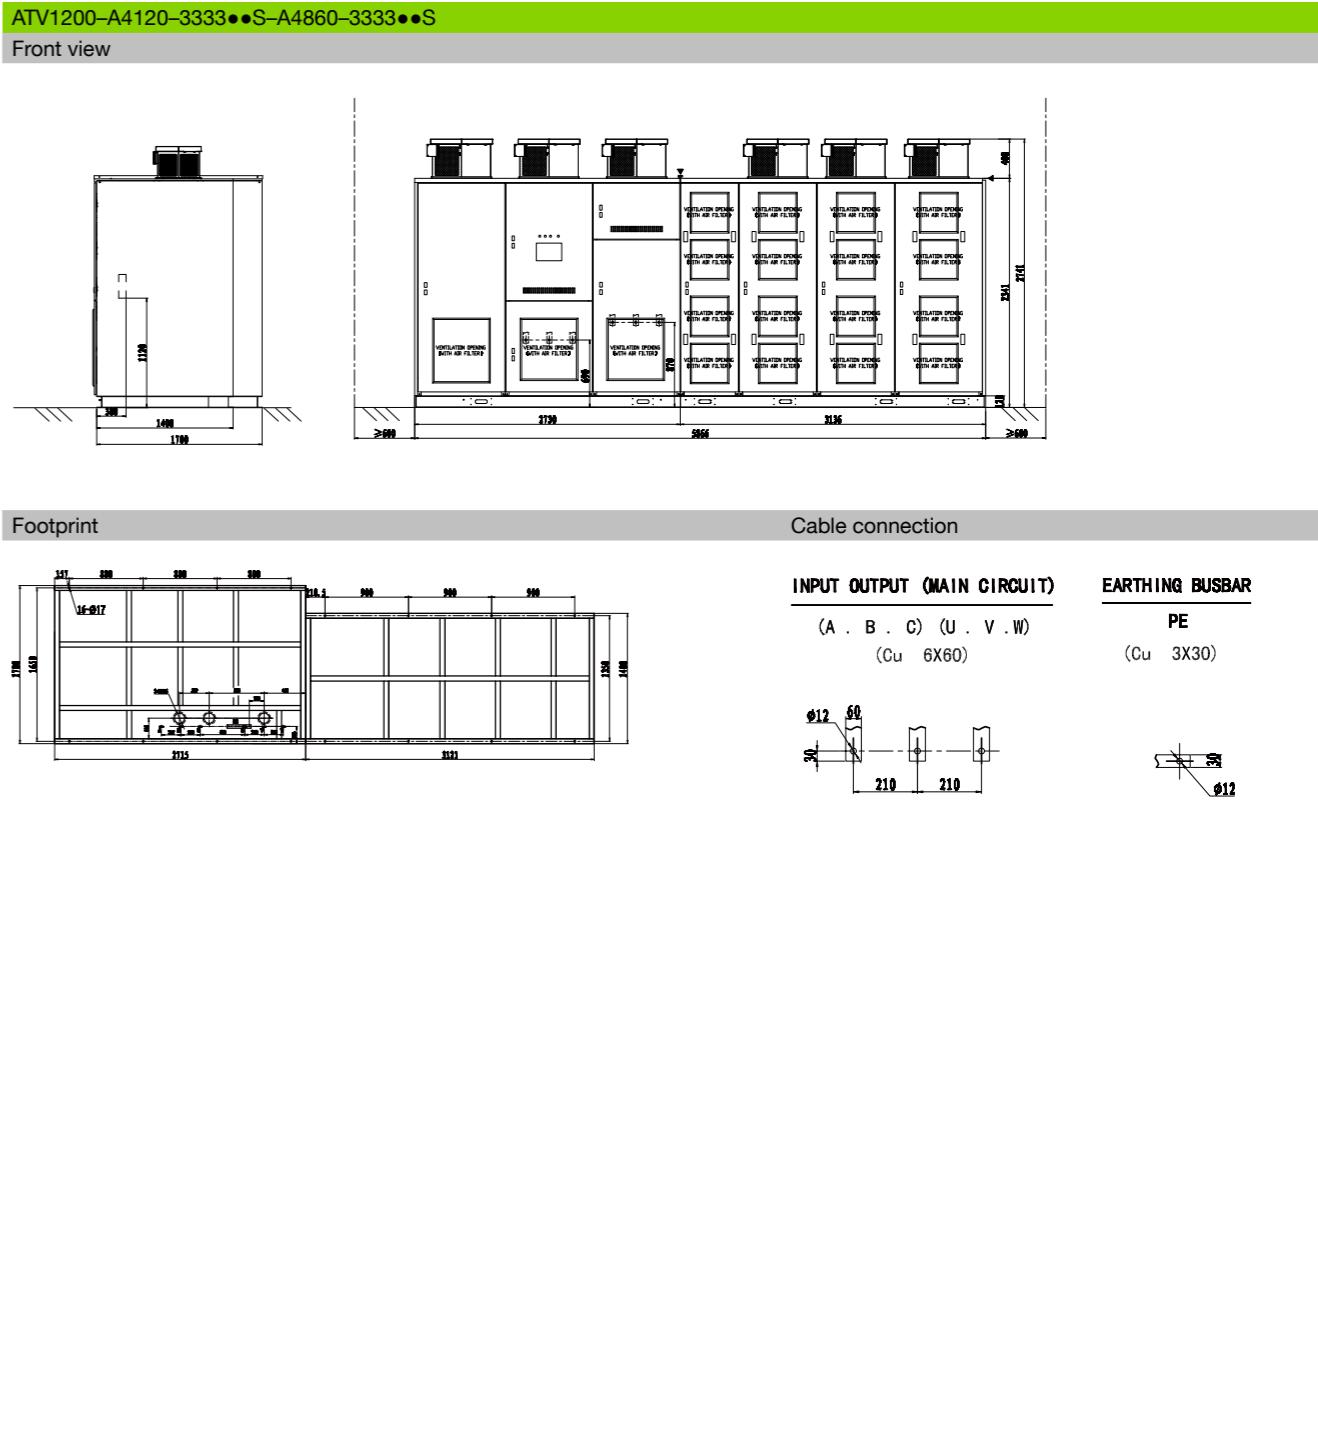

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

| Technical data for output voltage 4.16 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A350-4242••• | A470-4242••• | A560-4242••• |
| Nominal data | | | |
| Type rating [kVA] | 350 | 470 | 560 |
| Motor power [kW] | 293 | 393 | 468 |
| Continuous output current [A] | | | |
| With 120 % overload | 49 | 65 | 78 |
| With 150 % overload | 39 | 52 | 62 |
| Max. output current [A] | | | |
| 1 min/10 min | 58 | 78 | 94 |
| Power cells | | | |
| Number of cells per phase | 4 | 4 | 4 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 12 (incl. fan power) | ≤ 16 (incl. fan power) | ≤ 19 (incl. fan power) |
| High efficiency | ≤ 10 (incl. fan power) | ≤ 14 (incl. fan power) | ≤ 16 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 9900 | 9900 | 9900 |
| High efficiency | 13200 | 13200 | 13200 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 2400 | 2600 | 2800 |
| High efficiency | 3400 | 3700 | 3900 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 2660x1400x2520 | 2660x1400x2520 | 2660x1400x2520 |
| High efficiency | 2960x1500 x2670 | 2960x1500 x2670 | 2960x1500 x2670 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | |
|---|-----------------------------|
| ATV1200 | A720-4242••• |
| Nominal data | |
| Type rating [kVA] | 720 |
| Motor power [kW] | 602 |
| Continuous output current [A] | |
| With 120 % overload | 100 |
| With 150 % overload | 80 |
| Max. output current [A] | |
| 1 min/10 min | 120 |
| Power cells | |
| Number of cells per phase | 4 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 24 (incl. fan power) |
| High efficiency | ≤ 21 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 9900 |
| High efficiency | 16500 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3100 |
| High efficiency | 4200 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 2660x1400x2520 |
| High efficiency | 3260x1500 x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

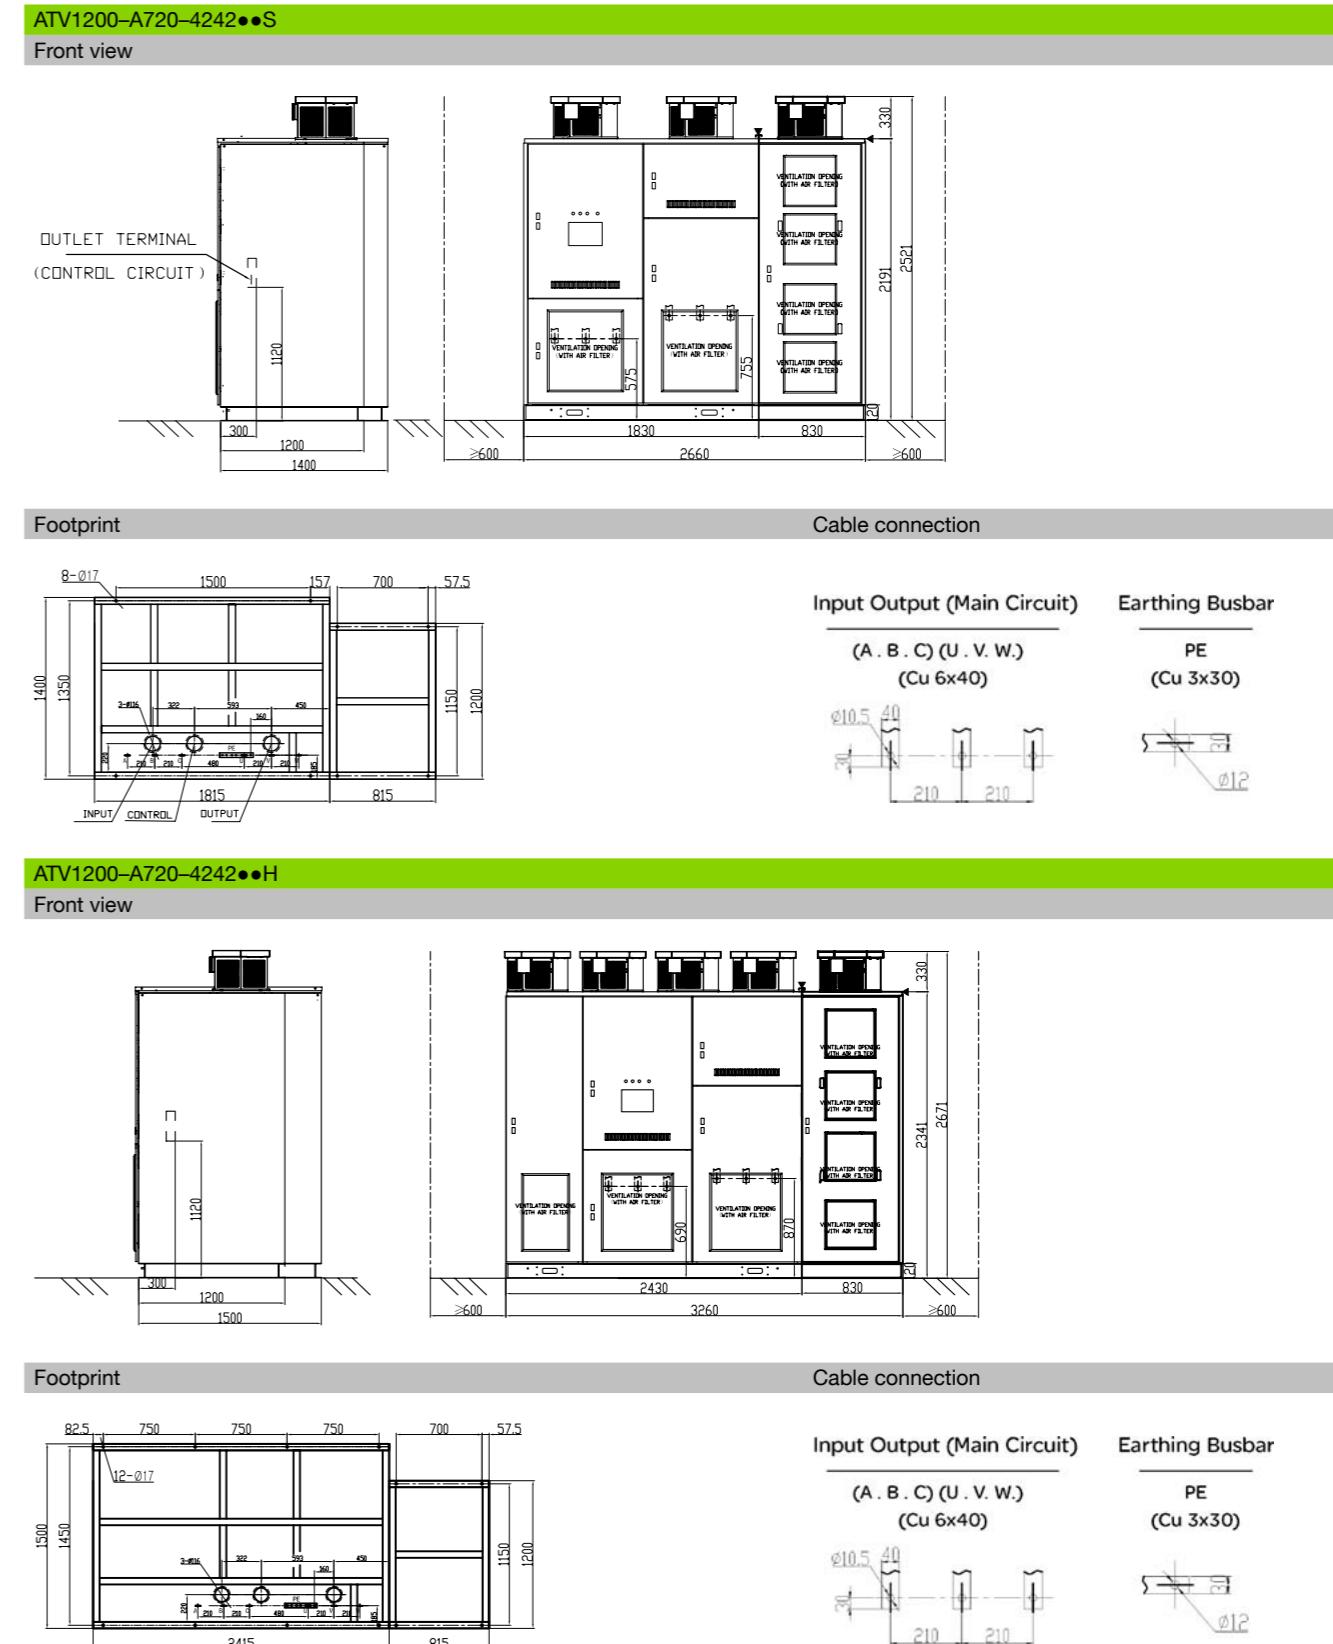

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A790-4242••• | A940-4242••• |
| Nominal data | | |
| Type rating [kVA] | 790 | 940 |
| Motor power [kW] | 660 | 786 |
| Continuous output current [A] | | |
| With 120 % overload | 109 | 130 |
| With 150 % overload | 87 | 104 |
| Max. output current [A] | | |
| 1 min/10 min | 131 | 156 |
| Power cells | | |
| Number of cells per phase | 4 | 4 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 26 (incl. fan power) | ≤ 31 (incl. fan power) |
| High efficiency | ≤ 23 (incl. fan power) | ≤ 28 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 13200 | 13200 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 3800 | 4000 |
| High efficiency | 4900 | 5000 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3060x1400x2520 | 3060x1400x2520 |
| High efficiency | 3660x1500 x2670 | 3660x1500 x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A790-4242••S ... A940-4242••S



Front view

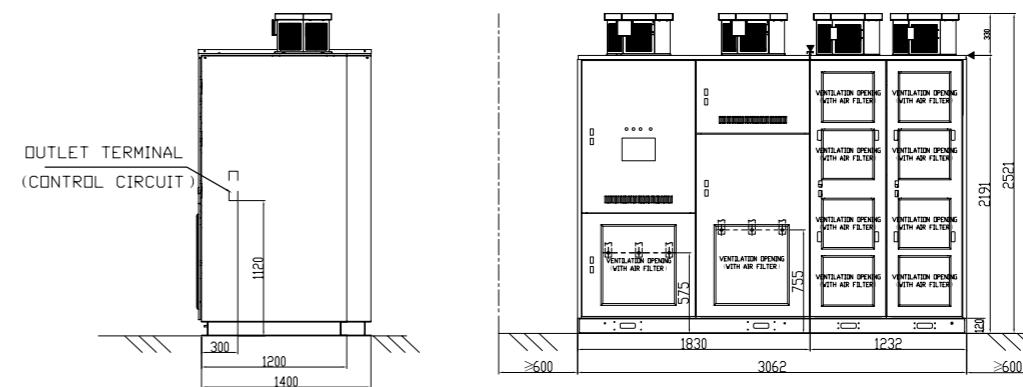

Footprint

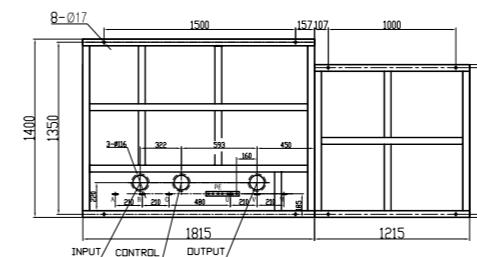


Cable connection

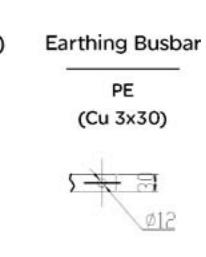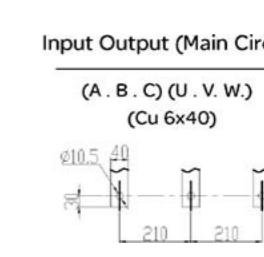


ATV1200-A790-4242••H ... A940-4242••H



Front view

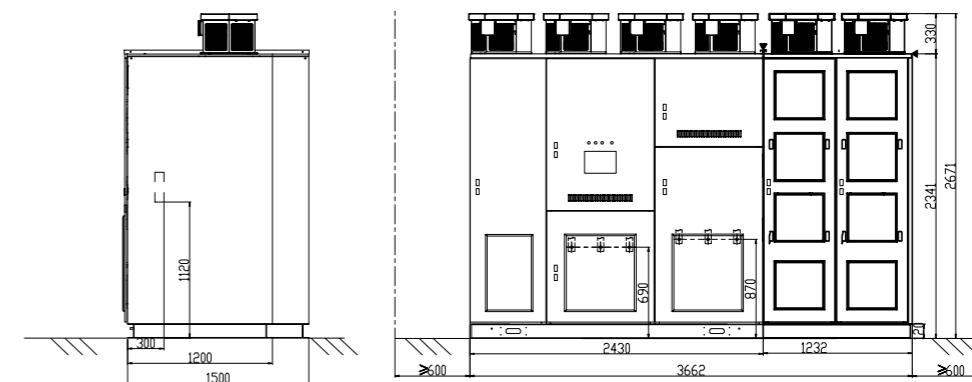

Footprint

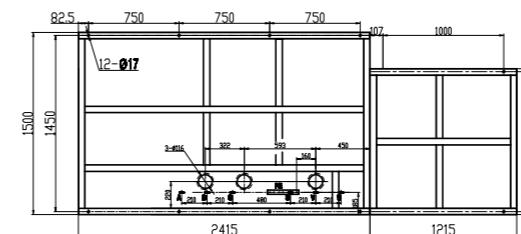

Cable connection

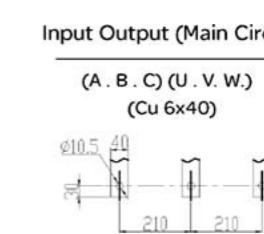

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

ATV1200 A1080-4242•••

Nominal data

Type rating [kVA]

1080

Motor power [kW]

903

Continuous output current [A]

With 120 % overload

150

With 150 % overload

120

Max. output current [A]

1 min/10 min

180

Power cells

Number of cells per phase

4

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 36
(incl. fan power)

High efficiency

≤ 32
(incl. fan power)

Air flow [m³/h]

Standard efficiency

High efficiency

29900

33200

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

4400

High efficiency

5300

Dimension[mm] W*D*H

Standard efficiency

3660x1400x2670

High efficiency

3960x1600 x2820

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A1080-4242••S



Front view

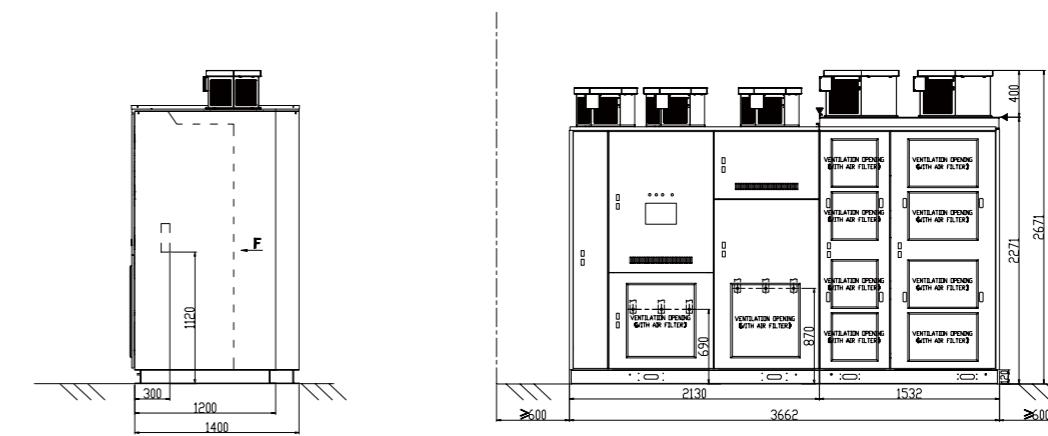

Footprint

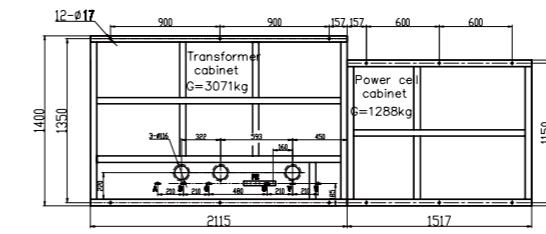


Cable connection

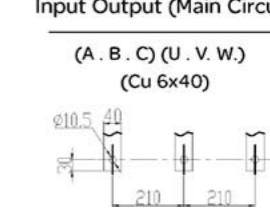


ATV1200-A1080-4242••H



Front view

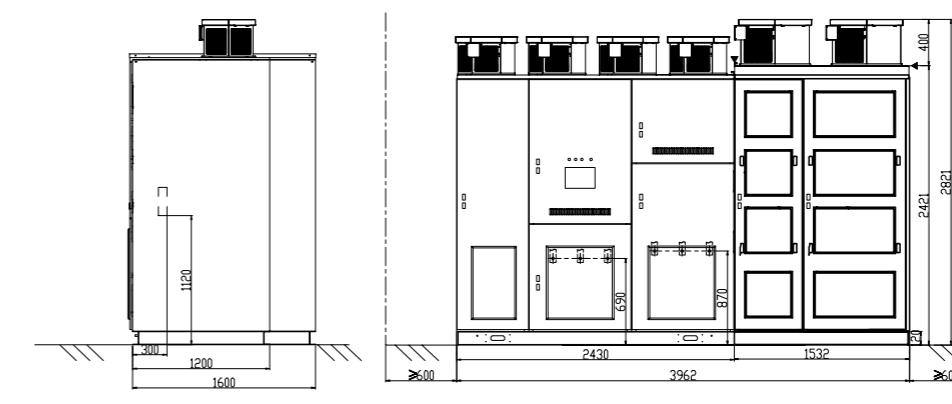

Footprint

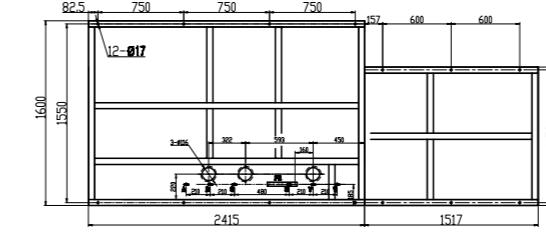

Cable connection

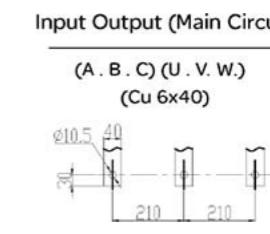

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1190-4242••• | A1450-4242••• |
| Nominal data | | |
| Type rating [kVA] | 1190 | 1450 |
| Motor power [kW] | 995 | 1212 |
| Continuous output current [A] | | |
| With 120 % overload | 165 | 200 |
| With 150 % overload | 132 | 160 |
| Max. output current [A] | | |
| 1 min/10 min | 198 | 240 |
| Power cells | | |
| Number of cells per phase | 4 | 4 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 40 (incl. fan power) | ≤ 48 (incl. fan power) |
| High efficiency | ≤ 35 (incl. fan power) | ≤ 42 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 5000 | 5300 |
| High efficiency | 5900 | 6300 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 4060x1400x2670 | 4060x1400x2670 |
| High efficiency | 4360x1600 x2670 | 4360x1600 x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A1190-4242••S...A1450-4242••S



Front view

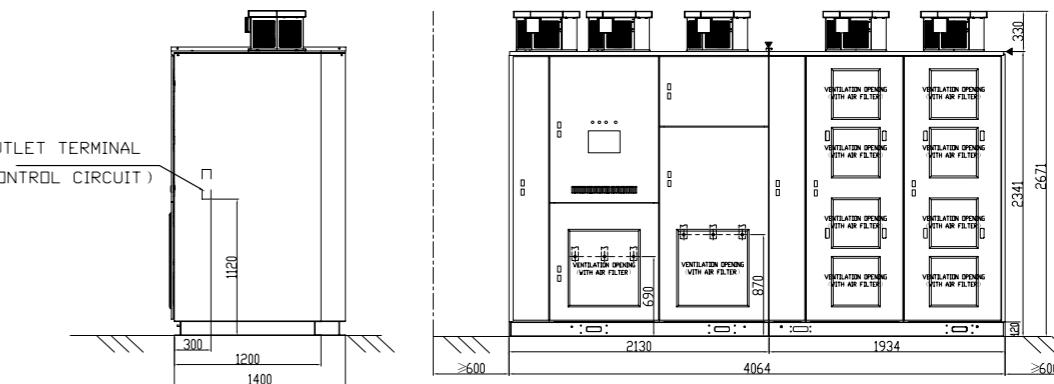

Footprint

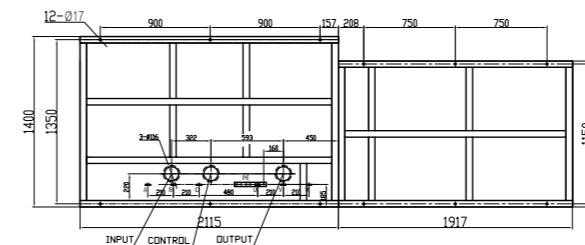


Cable connection




ATV1200-A1190-4242••H



Front view

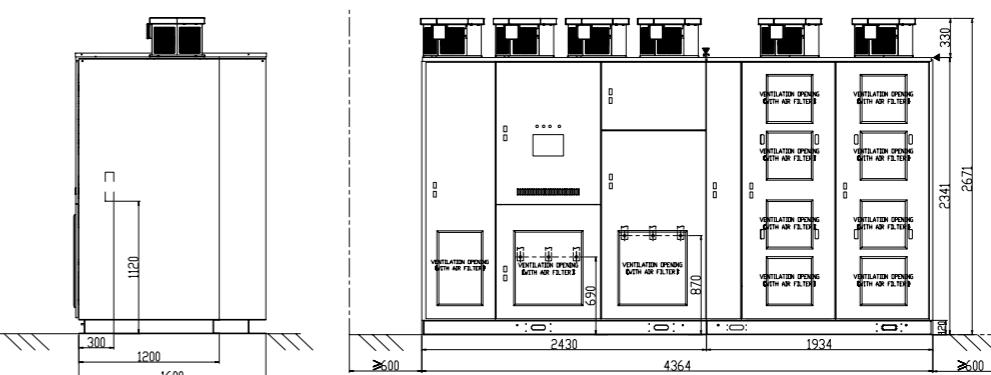

Footprint

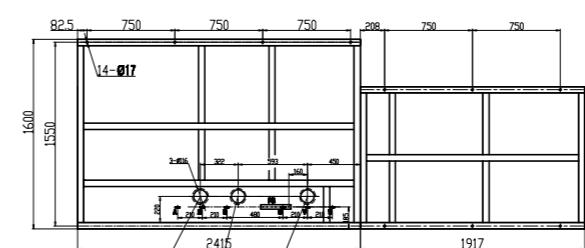

Cable connection



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

| Technical data for output voltage 4.16 kV | |
|---|-----------------------------|
| ATV1200 | A1585-4242••• |
| Nominal data | |
| Type rating [kVA] | 1585 |
| Motor power [kW] | 1325 |
| Continuous output current [A] | |
| With 120 % overload | 220 |
| With 150 % overload | 176 |
| Max. output current [A] | |
| 1 min/10 min | 264 |
| Power cells | |
| Number of cells per phase | 4 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 53 (incl. fan power) |
| High efficiency | ≤ 46 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 16500 |
| High efficiency | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5600 |
| High efficiency | 6500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4060x1500x2670 |
| High efficiency | 4360x1600 x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | |
|---|-----------------------------|
| ATV1200 | A1750-4242••• |
| Nominal data | |
| Type rating [kVA] | 1750 |
| Motor power [kW] | 1463 |
| Continuous output current [A] | |
| With 120 % overload | 243 |
| With 150 % overload | 194 |
| Max. output current [A] | |
| 1 min/10 min | 291 |
| Power cells | |
| Number of cells per phase | 4 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 59 (incl. fan power) |
| High efficiency | ≤ 51 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5800 |
| High efficiency | 6800 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4060x1500x2740 |
| High efficiency | 4360x1600 x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

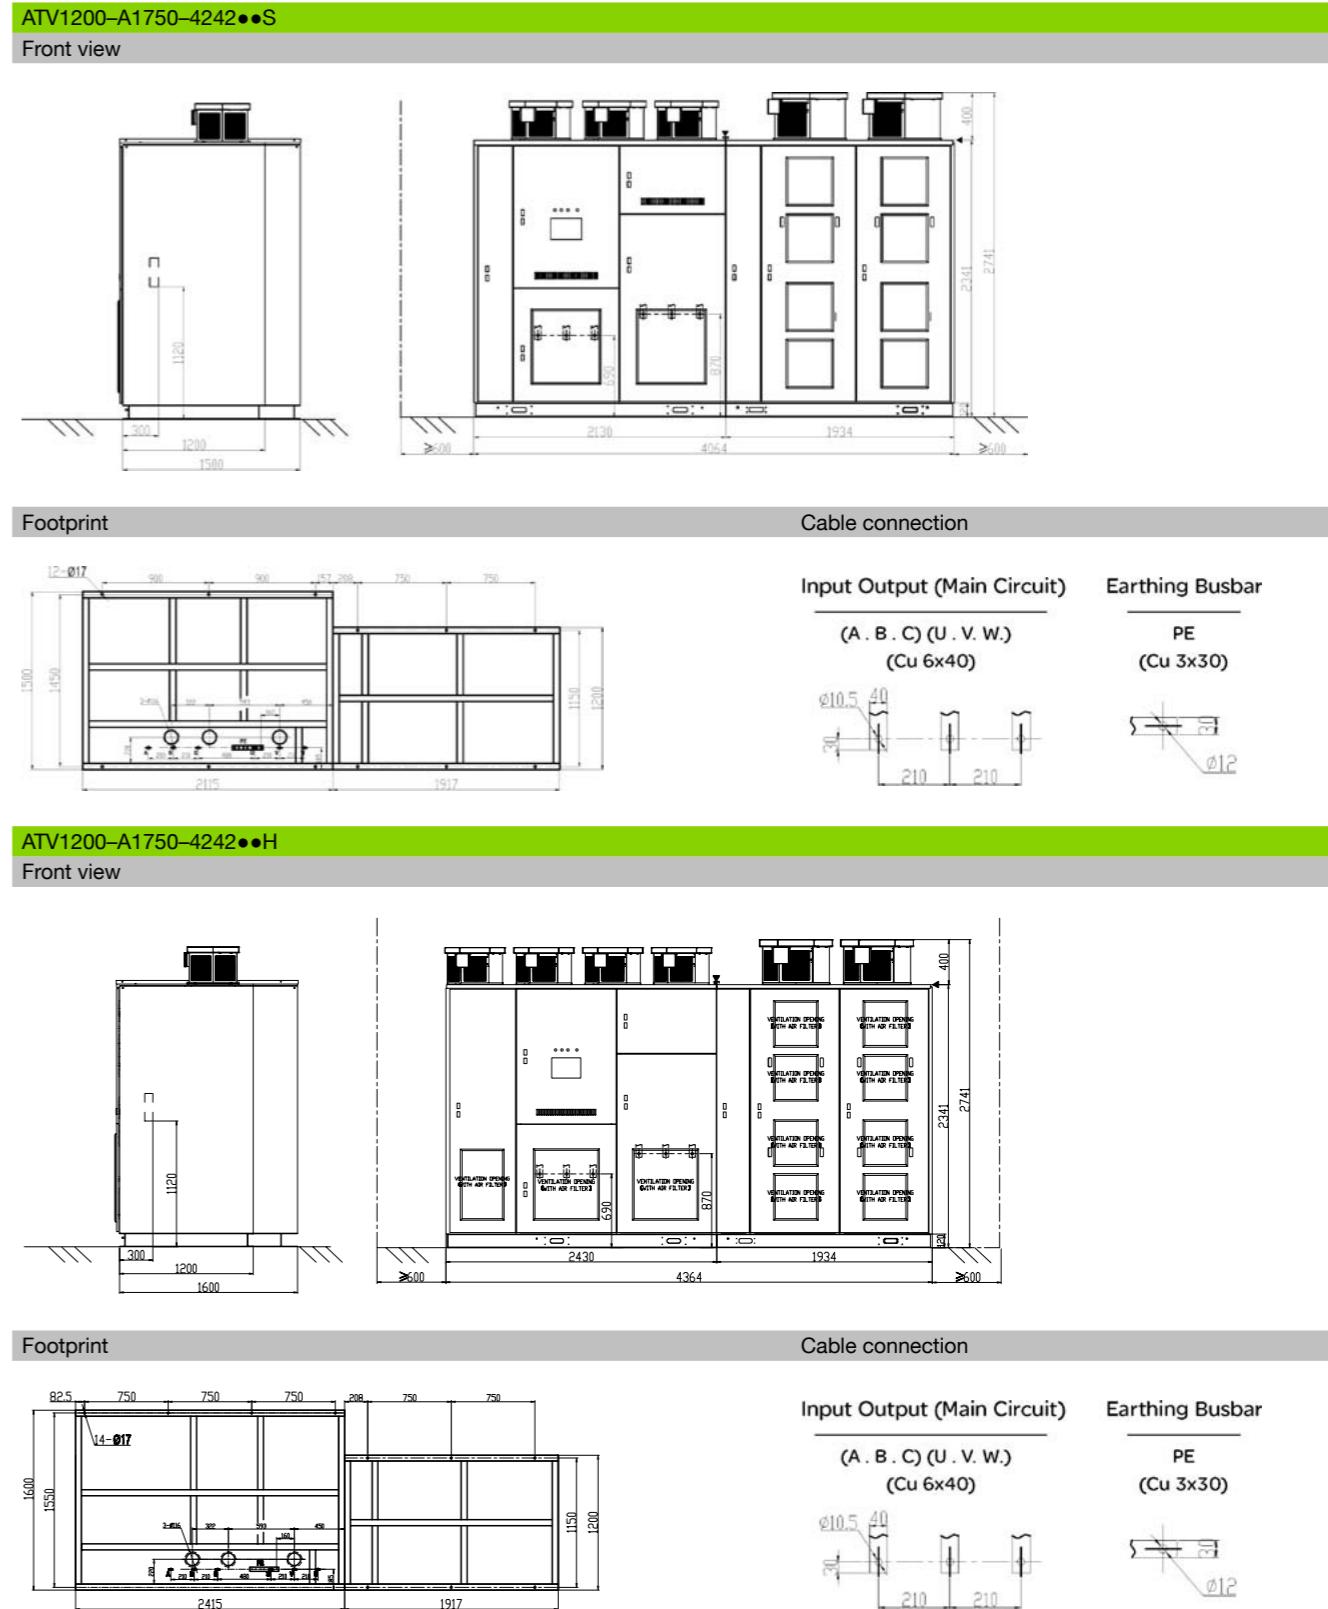

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | |
|---|-----------------------------|
| ATV1200 | A2020-4242••• |
| Nominal data | |
| Type rating [kVA] | 2020 |
| Motor power [kW] | 1689 |
| Continuous output current [A] | |
| With 120 % overload | 280 |
| With 150 % overload | 224 |
| Max. output current [A] | |
| 1 min/10 min | 336 |
| Power cells | |
| Number of cells per phase | 4 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 68 (incl. fan power) |
| High efficiency | ≤ 59 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 33200 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 6300 |
| High efficiency | 7200 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4360x1500x2740 |
| High efficiency | 4660x1700 x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

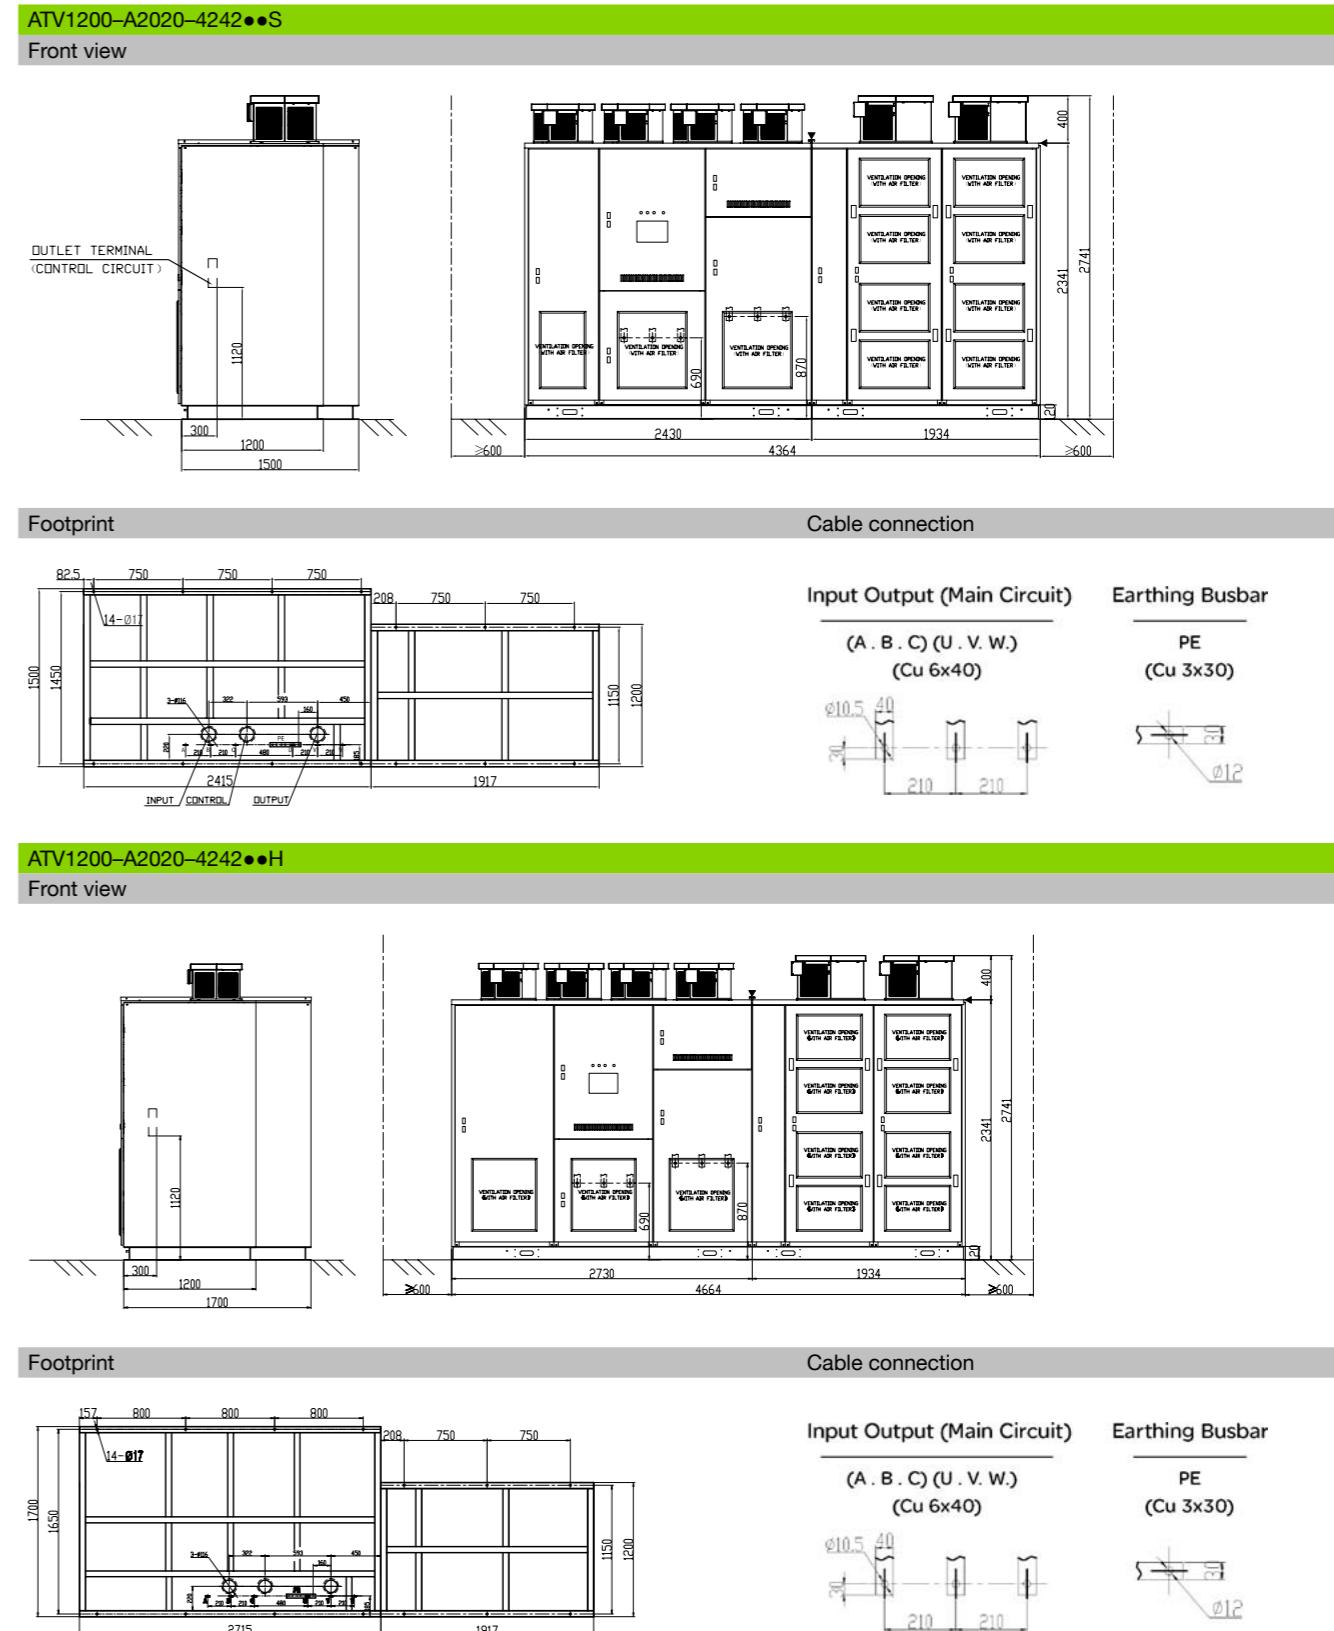

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2310-4242••• | A2500-4242••• |
| Nominal data | | |
| Type rating [kVA] | 2310 | 2500 |
| Motor power [kW] | 1931 | 2090 |
| Continuous output current [A] | | |
| With 120 % overload | 320 | 347 |
| With 150 % overload | 256 | 278 |
| Max. output current [A] | | |
| 1 min/10 min | 384 | 416 |
| Power cells | | |
| Number of cells per phase | 4 | 4 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 77 (incl. fan power) | ≤ 84 (incl. fan power) |
| High efficiency | ≤ 68 (incl. fan power) | ≤ 73 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 26400 | 26400 |
| High efficiency | 26400 | 26400 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 7700 | 7900 |
| High efficiency | 8800 | 9300 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1500x2670 | 5170x1500x2670 |
| High efficiency | 5470x1700 x2670 | 5470x1700 x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A2310-4242••S ... A2500-4242••S


Front view

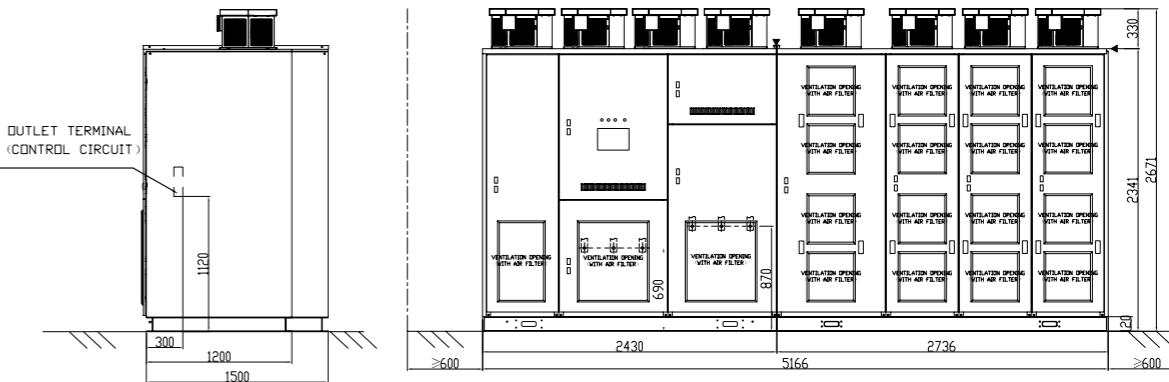

Footprint

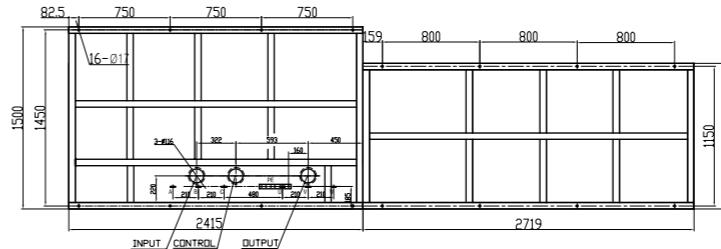


Cable connection

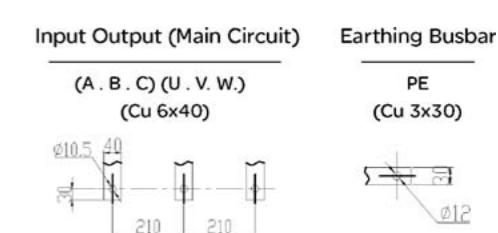


ATV1200-A2310-4242••H ... A2500-4242••H


Front view

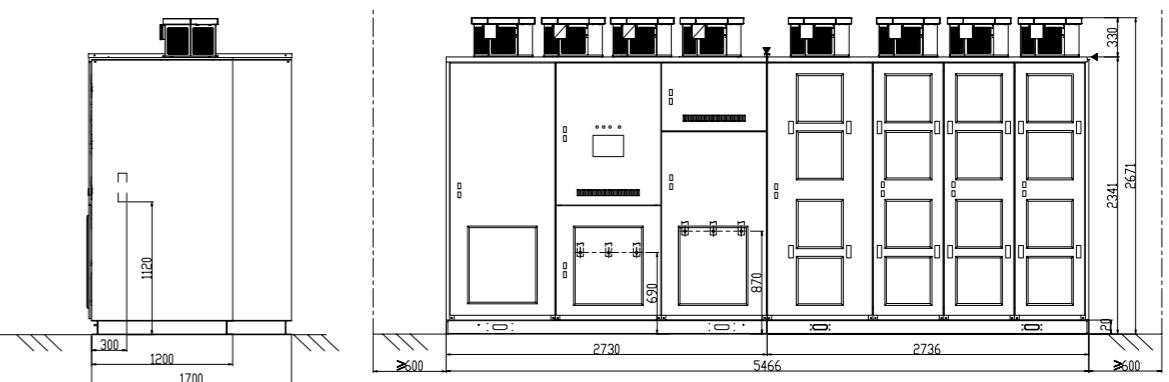

Footprint

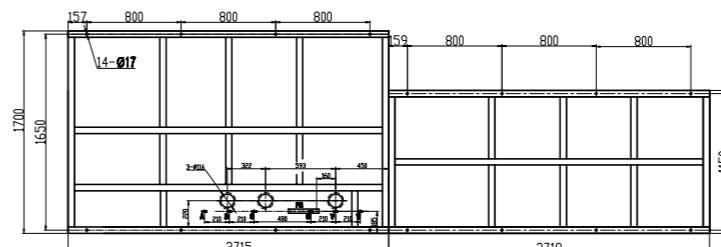

Cable connection

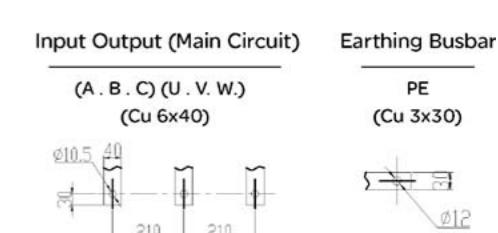

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2960-4242••• | A3130-4242••• |
| Nominal data | | |
| Type rating [kVA] | 2960 | 3130 |
| Motor power [kW] | 2475 | 2617 |
| Continuous output current [A] | | |
| With 120 % overload | 410 | 434 |
| With 150 % overload | 328 | 347 |
| Max. output current [A] | | |
| 1 min/10 min | 492 | 520 |
| Power cells | | |
| Number of cells per phase | 4 | 4 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 99 (incl. fan power) | ≤ 105 (incl. fan power) |
| High efficiency | ≤ 87 (incl. fan power) | ≤ 92 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 26400 | 26400 |
| High efficiency | 26400 | 26400 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 8500 | 8800 |
| High efficiency | 9800 | 10100 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1600x2670 | 5170x1600x2670 |
| High efficiency | 5470x1700 x2670 | 5470x1700 x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A2960-4242••S ... A3130-4242••S


Front view

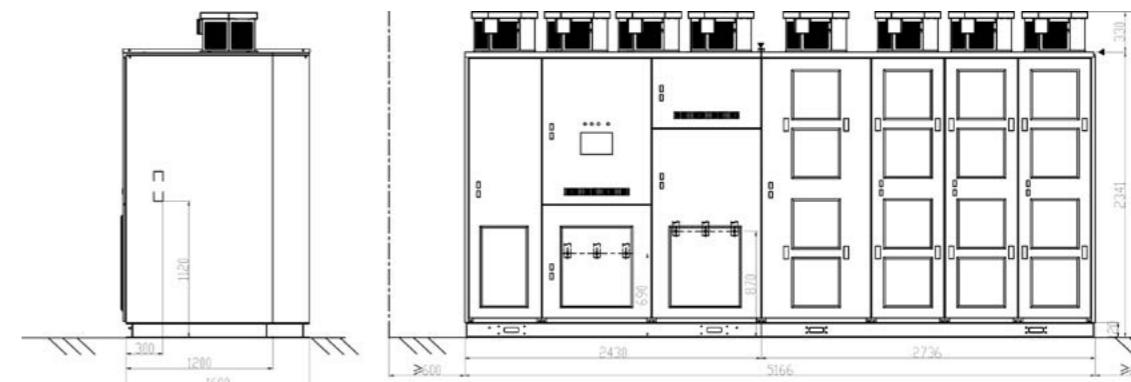

Footprint

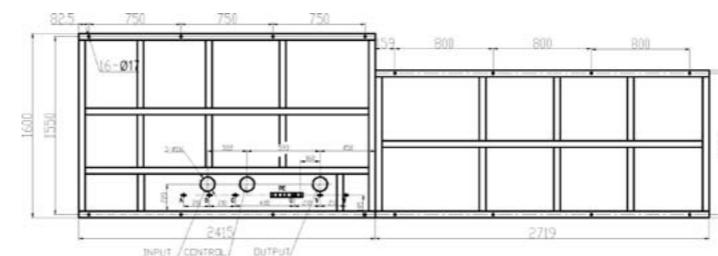


Cable connection

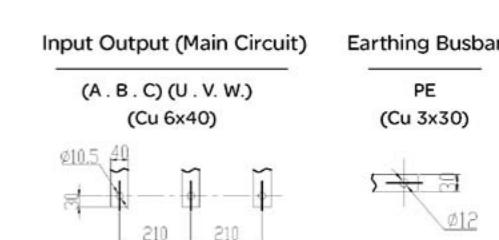


ATV1200-A2960-4242••H ... A3130-4242••H


Front view

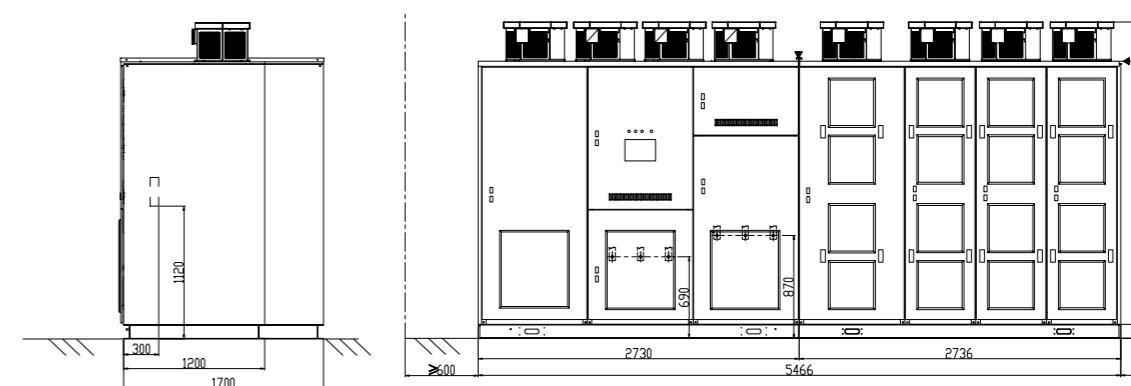

Footprint

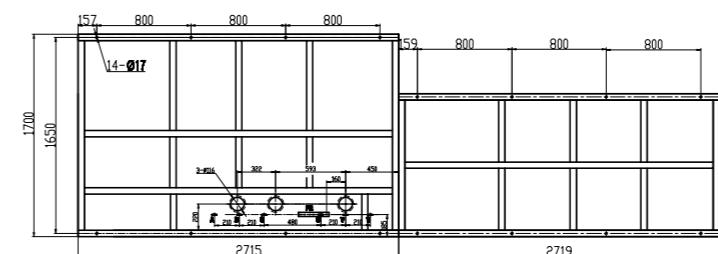

Cable connection

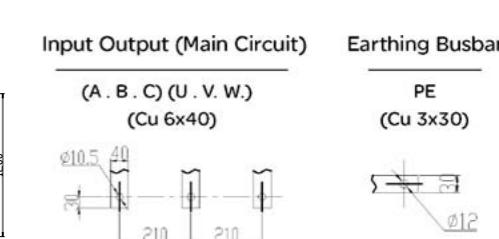

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

Technical data for output voltage 4.16 kV

ATV1200 A3530-4242•••

Nominal data

Type rating [kVA]

3530

Motor power [kW]

2951

Continuous output current [A]

With 120 % overload

490

With 150 % overload

392

Max. output current [A]

1 min/10 min

588

Power cells

Number of cells per phase

4

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency ≥ 96.1
(incl. fan power)

High efficiency ≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency ≤ 115
(incl. fan power)

High efficiency ≤ 103
(incl. fan power)

Air flow [m^3/h]

Standard efficiency 43200

High efficiency 43200

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency 9600

High efficiency 10500

Dimension[mm] W*D*H

Standard efficiency 5470x1700x2820

High efficiency 5470x1700 x2820

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data



Altivar 1200

Medium Voltage Drive Systems


Output voltage 4.16 kV

ATV1200-A3530-4242••S



Front view

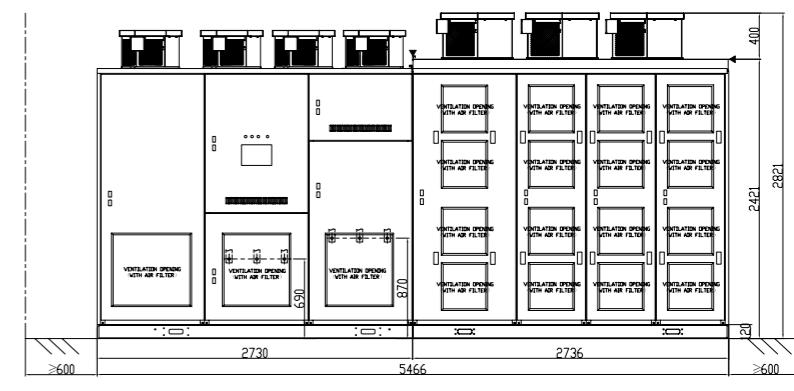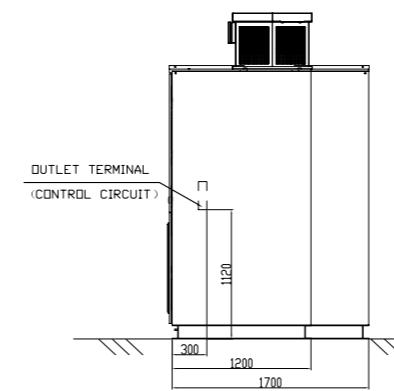

Footprint


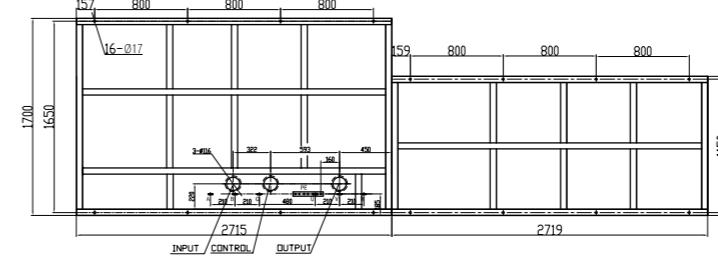


Cable connection

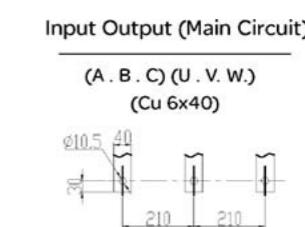


ATV1200-A3530-4242••H


Front view

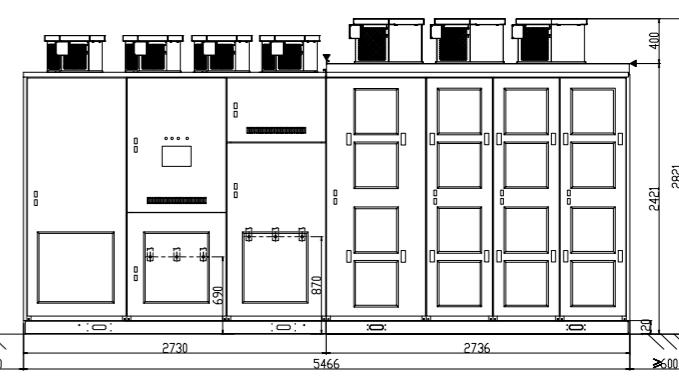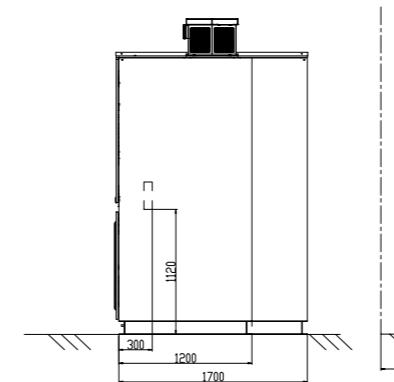

Footprint

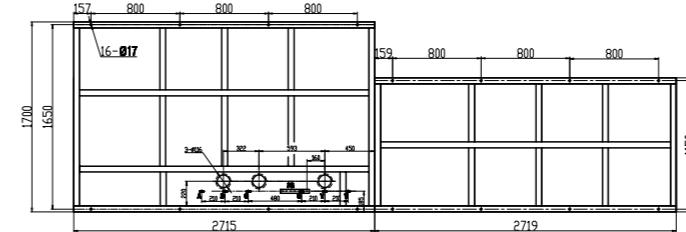

Cable connection

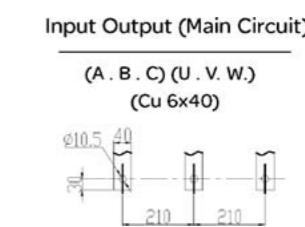

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A4000-4242••• | A4400-4242••• | A4760-4242••• |
| Nominal data | | | |
| Type rating [kVA] | 4000 | 4400 | 4760 |
| Motor power [kW] | 3344 | 3678 | 3979 |
| Continuous output current [A] | | | |
| With 120 % overload | 550 | 611 | 661 |
| With 150 % overload | 440 | 489 | 529 |
| Max. output current [A] | | | |
| 1 min/10 min | 660 | 733 | 793 |
| Power cells | | | |
| Number of cells per phase | 4 | 4 | 4 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.2 (incl. fan power) | ≥ 96.2 (incl. fan power) | ≥ 96.2 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 127 (incl. fan power) | ≤ 140 (incl. fan power) | ≤ 151 (incl. fan power) |
| High efficiency | ≤ 117 (incl. fan power) | ≤ 129 (incl. fan power) | ≤ 139 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 70000 | 70000 | 70000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 12100 | 12500 | 13000 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 6670x1800x2740 | 6670x1800x2740 | 6670x1800x2740 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

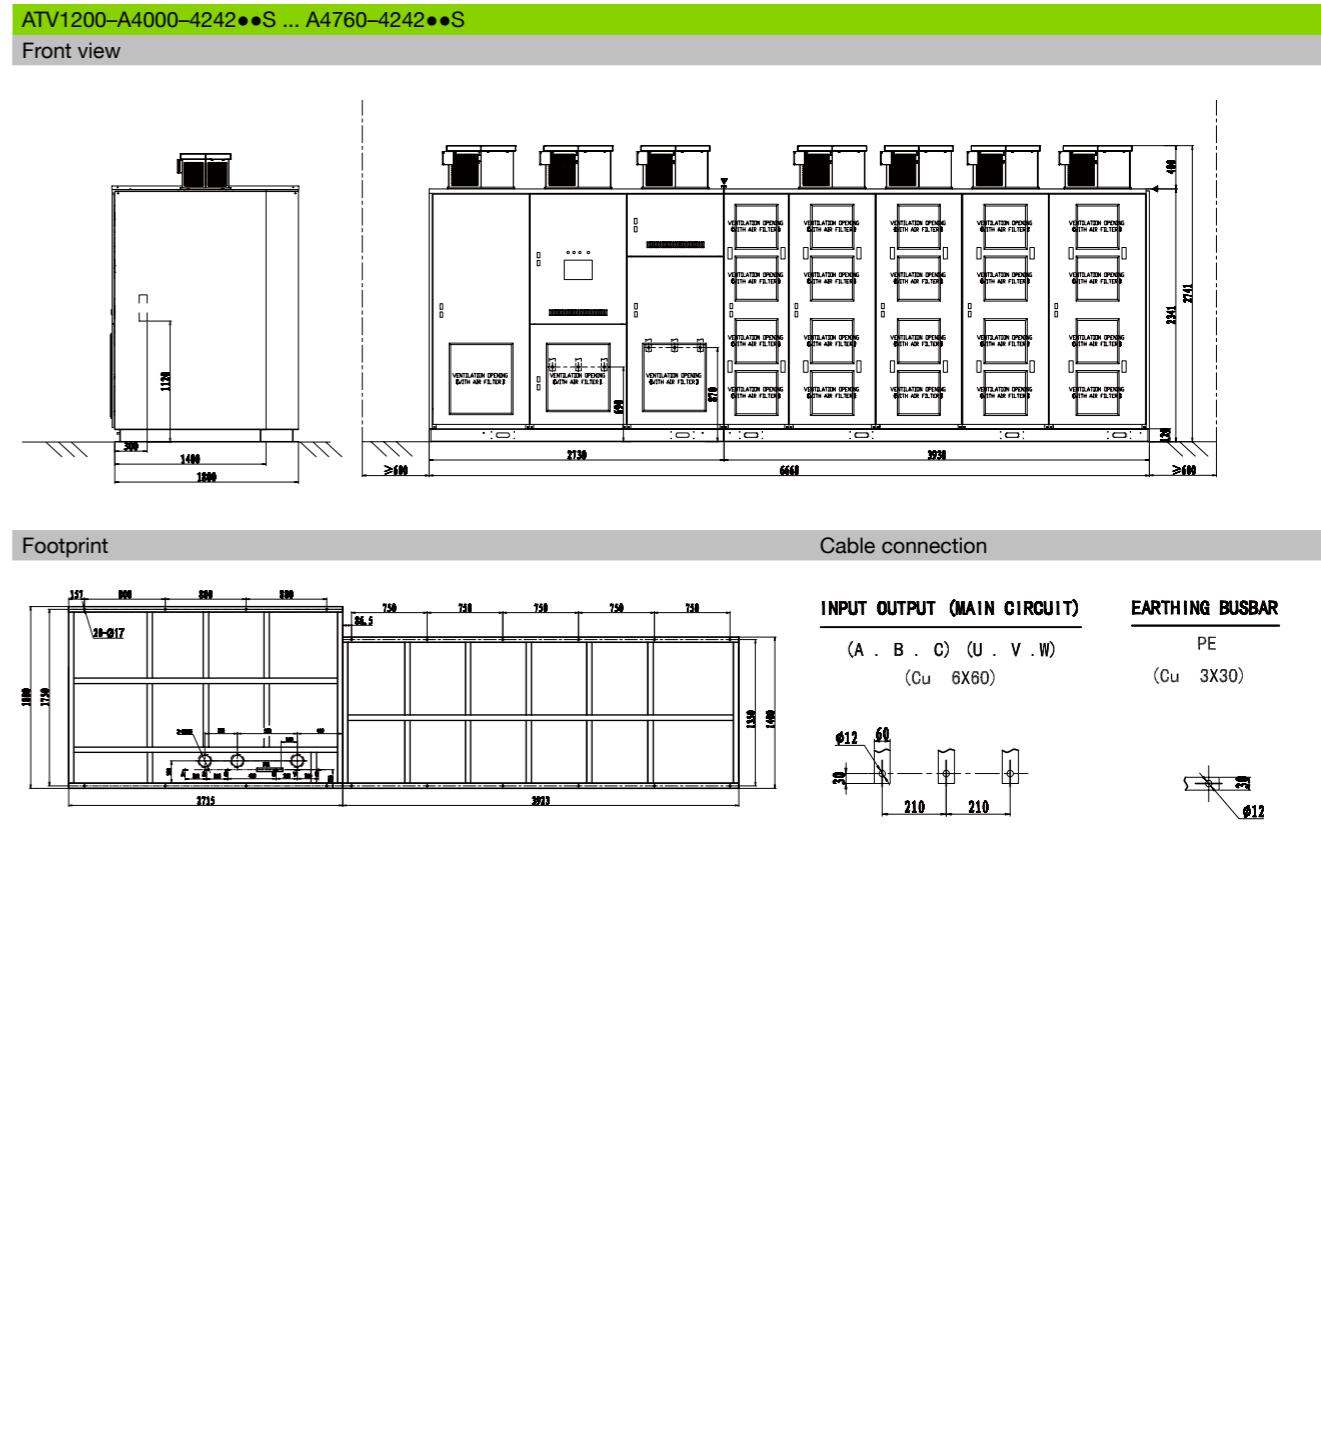

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | | |
|---|-----------------------------|-----------------------------|
| ATV1200 | A5200-4242••• | A5650-4242••• |
| Nominal data | | |
| Type rating [kVA] | 5200 | 5650 |
| Motor power [kW] | 4347 | 4723 |
| Continuous output current [A] | | |
| With 120 % overload | 720 | 784 |
| With 150 % overload | 576 | 627 |
| Max. output current [A] | | |
| 1 min/10 min | 864 | 941 |
| Power cells | | |
| Number of cells per phase | 4 | 4 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.3 (incl. fan power) | ≥ 96.3 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 161 (incl. fan power) | ≤ 175 (incl. fan power) |
| High efficiency | ≤ 152 (incl. fan power) | ≤ 165 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 70000 | 70000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 13800 | 14200 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6670x1800x2740 | 6670x1800x2740 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

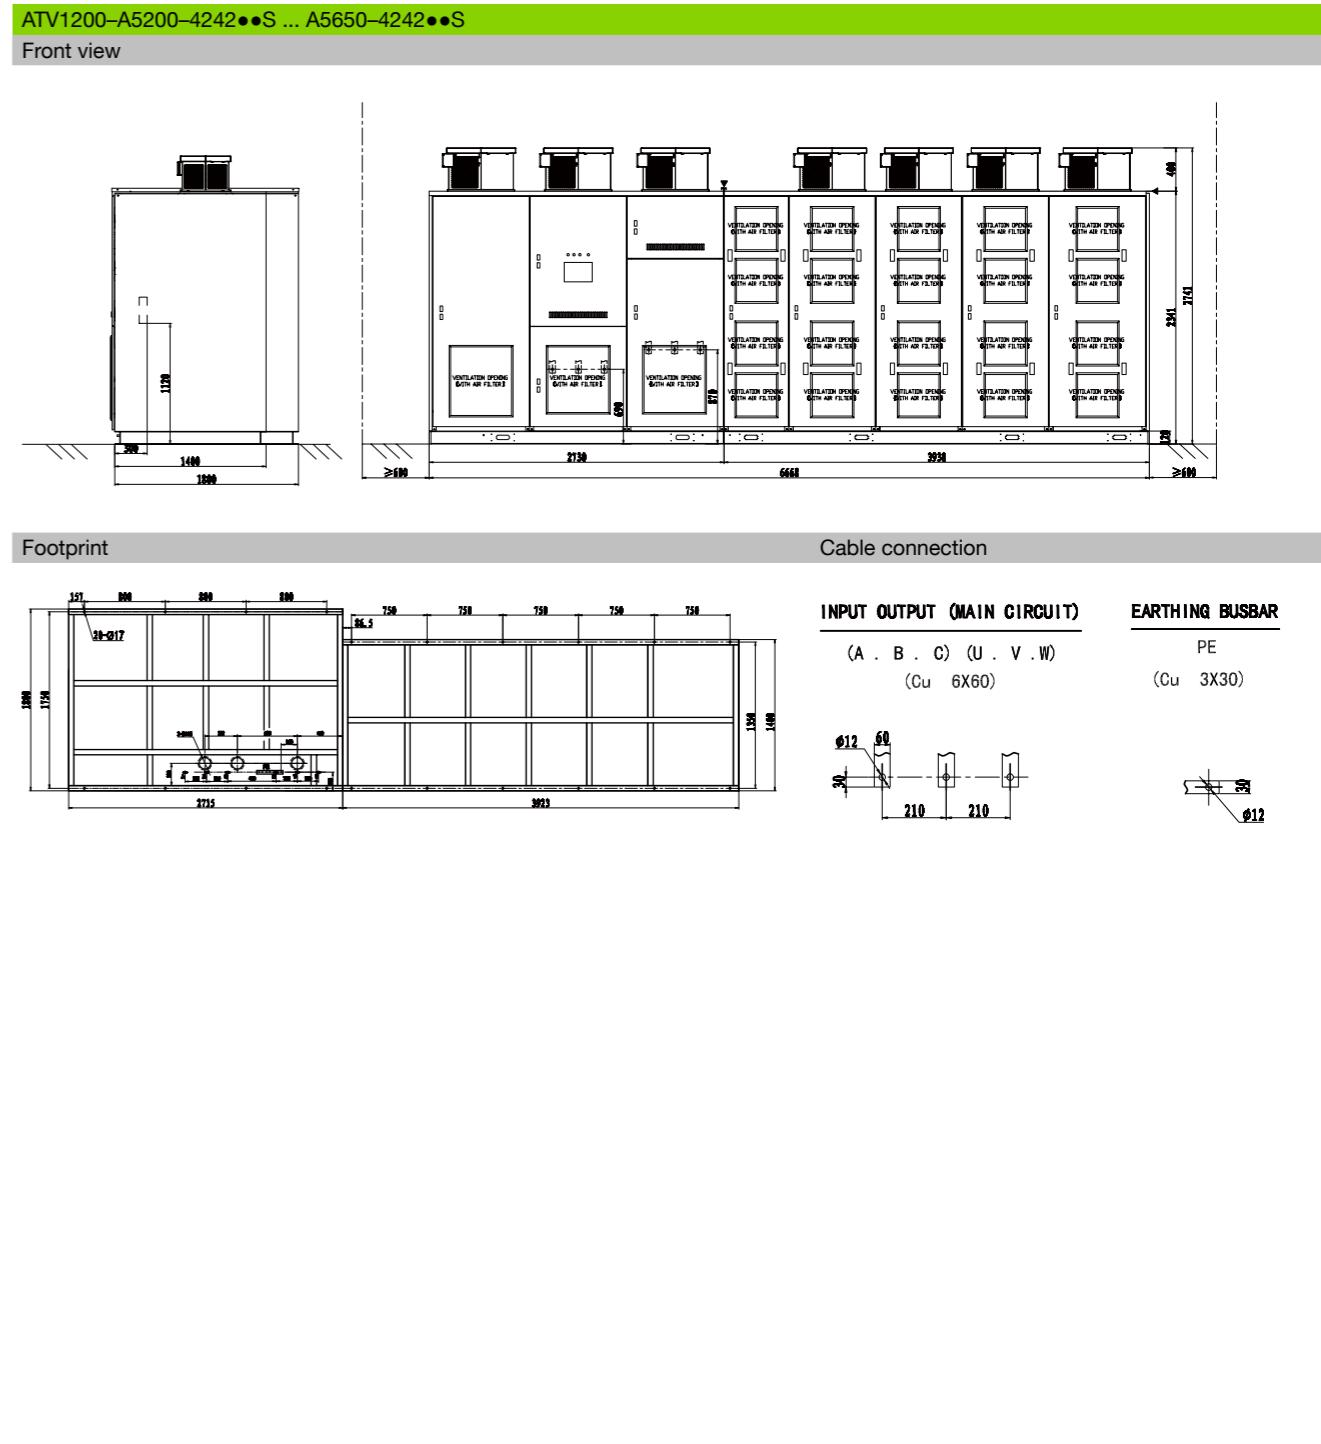

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV


| Technical data for output voltage 4.16 kV | |
|---|-----------------------------|
| ATV1200 | A6150-4242••• |
| Nominal data | |
| Type rating [kVA] | 6150 |
| Motor power [kW] | 5141 |
| Continuous output current [A] | |
| With 120 % overload | 850 |
| With 150 % overload | 680 |
| Max. output current [A] | |
| 1 min/10 min | 1020 |
| Power cells | |
| Number of cells per phase | 4 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.4 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 185 (incl. fan power) |
| High efficiency | ≤ 180 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 70000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 14700 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6970x1800x3040 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 4.16 kV

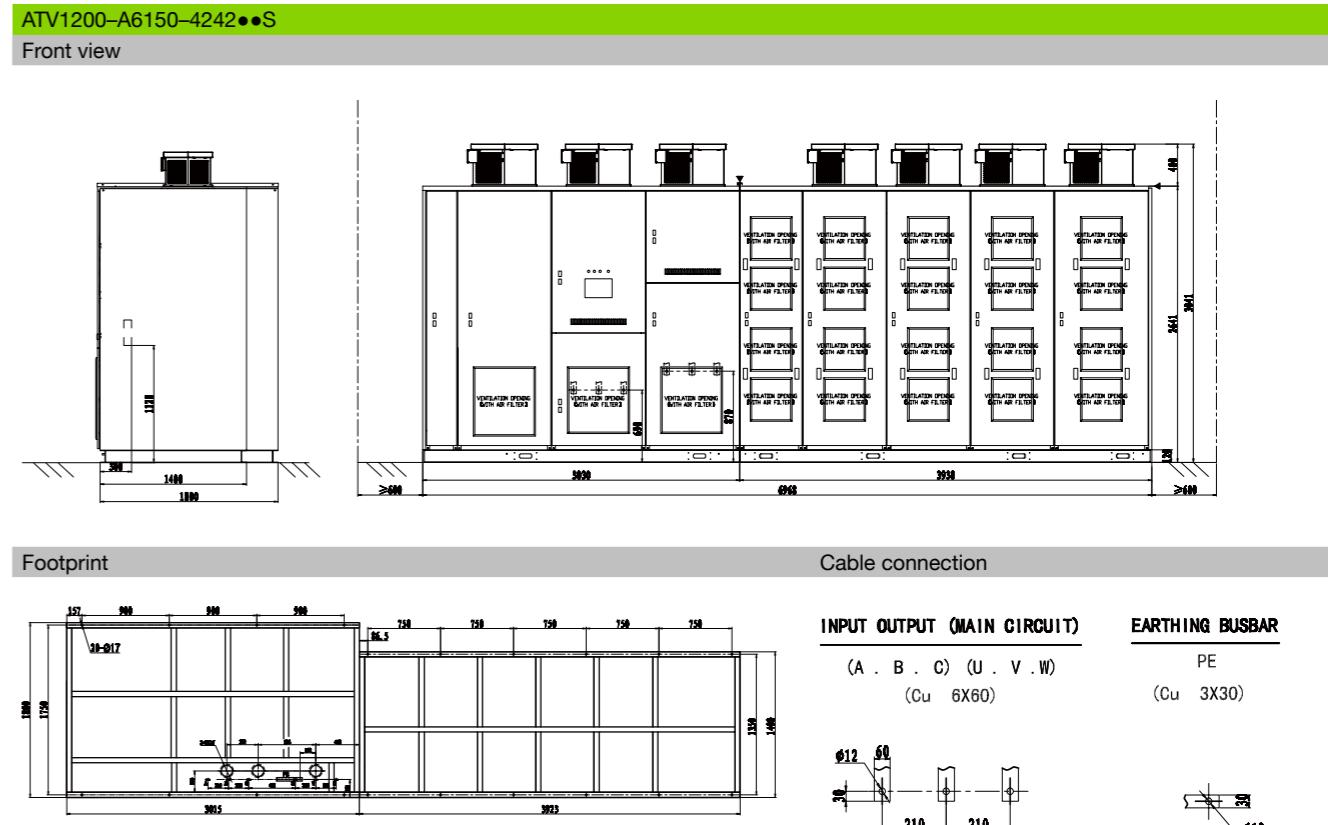

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A430-5555••• | A520-5555••• | A620-5555••• |
| Nominal data | | | |
| Type rating [kVA] | 430 | 520 | 620 |
| Motor power [kW] | 359 | 435 | 518 |
| Continuous output current [A] | | | |
| With 120 % overload | 45 | 55 | 65 |
| With 150 % overload | 36 | 44 | 52 |
| Max. output current [A] | | | |
| 1 min/10 min | 54 | 66 | 78 |
| Power cells | | | |
| Number of cells per phase | 5 | 5 | 5 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 14 (incl. fan power) | ≤ 17 (incl. fan power) | ≤ 21 (incl. fan power) |
| High efficiency | ≤ 13 (incl. fan power) | ≤ 15 (incl. fan power) | ≤ 18 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 16600 | 16600 | 16600 |
| High efficiency | 19900 | 19900 | 19900 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 2900 | 2900 | 3300 |
| High efficiency | 3800 | 4100 | 4200 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 2860x1400x2590 | 2860x1400x2590 | 2860x1400x2590 |
| High efficiency | 3160x1500x2740 | 3160x1500x2740 | 3160x1500x2740 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

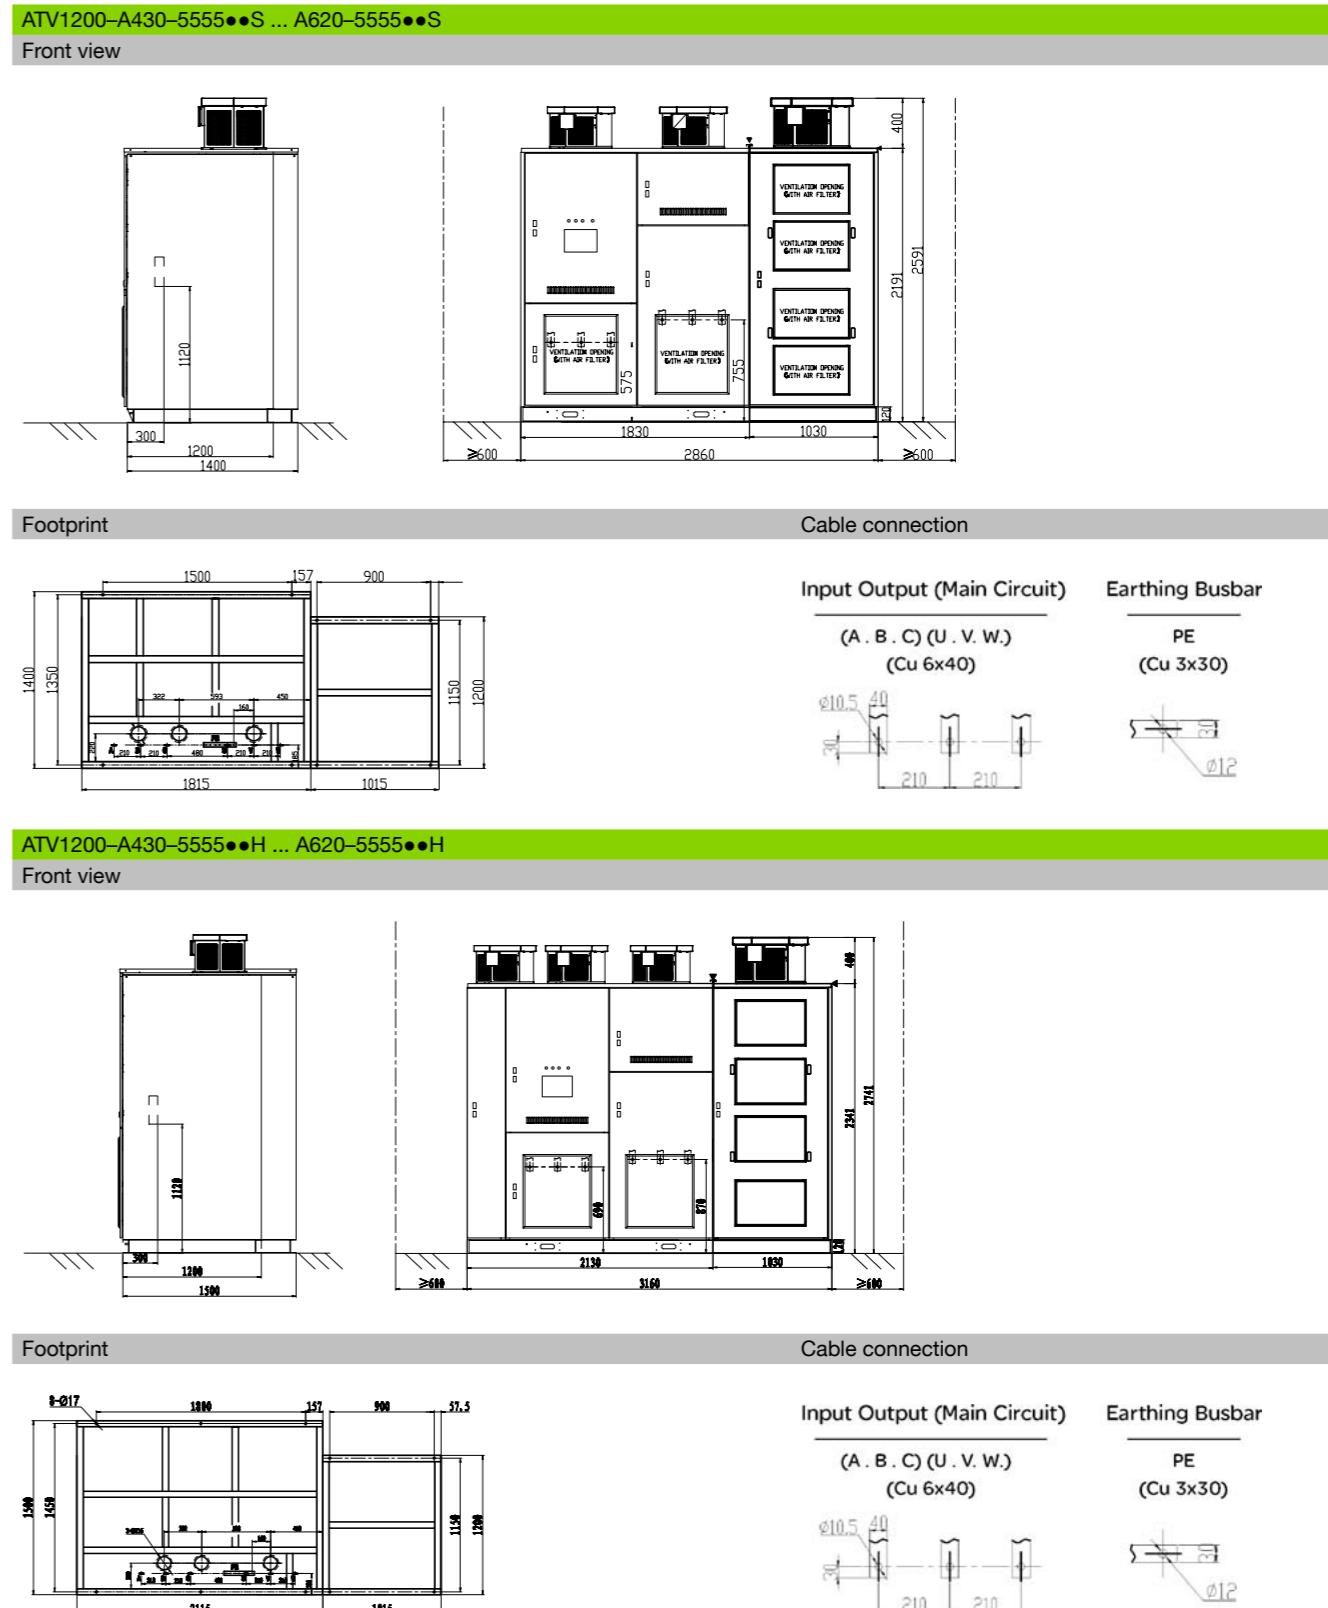

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A730-5555••• | A860-5555••• |
| Nominal data | | |
| Type rating [kVA] | 730 | 860 |
| Motor power [kW] | 610 | 719 |
| Continuous output current [A] | | |
| With 120 % overload | 76 | 90 |
| With 150 % overload | 61 | 72 |
| Max. output current [A] | | |
| 1 min/10 min | 91 | 108 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 24 (incl. fan power) | ≤ 29 (incl. fan power) |
| High efficiency | ≤ 21 (incl. fan power) | ≤ 25 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16600 | 16600 |
| High efficiency | 23200 | 23200 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 3300 | 3600 |
| High efficiency | 4400 | 4600 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 2860x1400x2590 | 2860x1400x2590 |
| High efficiency | 3460x1500x2740 | 3460x1500x2740 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

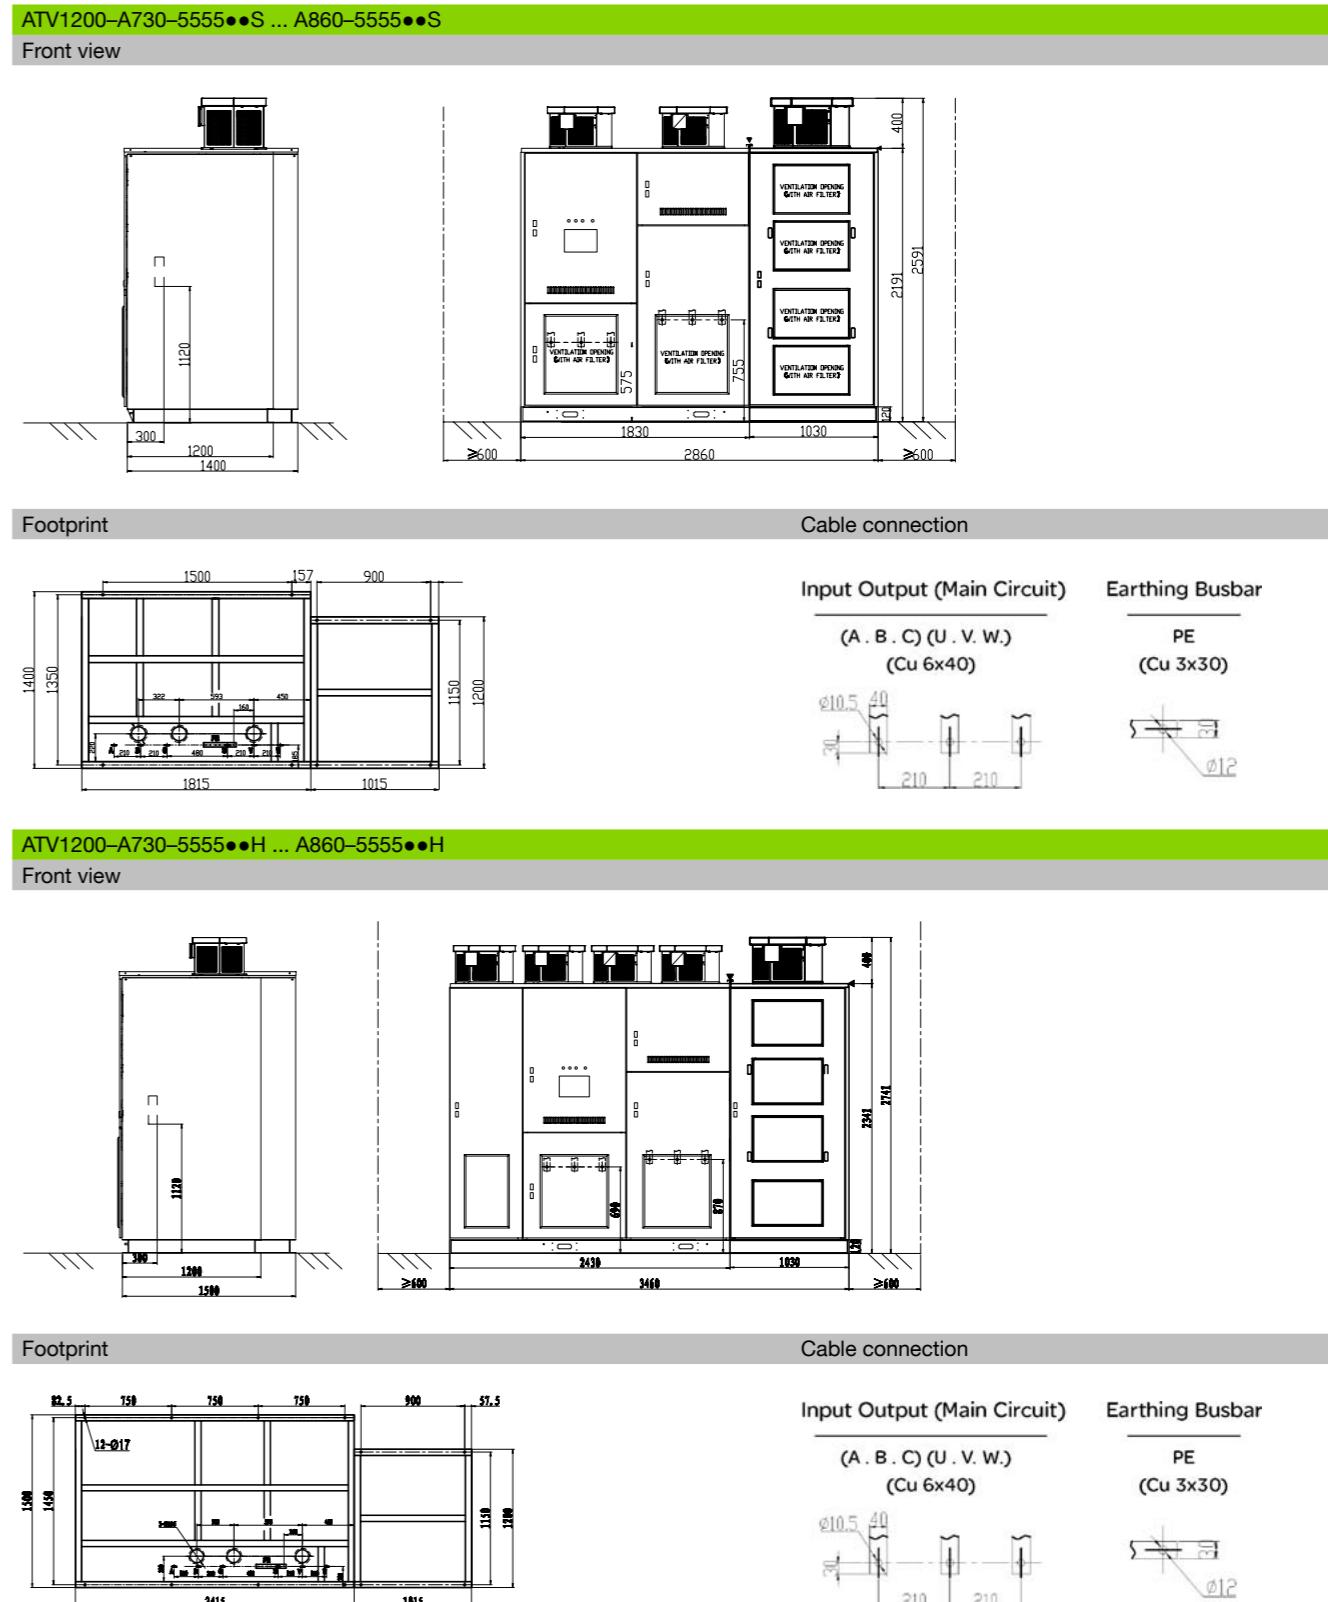

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A960-5555••• |
| Nominal data | |
| Type rating [kVA] | 960 |
| Motor power [kW] | 803 |
| Continuous output current [A] | |
| With 120 % overload | 100 |
| With 150 % overload | 80 |
| Max. output current [A] | |
| 1 min/10 min | 120 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 32 (incl. fan power) |
| High efficiency | ≤ 28 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 19900 |
| High efficiency | 23200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3800 |
| High efficiency | 4800 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3160x1400x2590 |
| High efficiency | 3460x1600x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

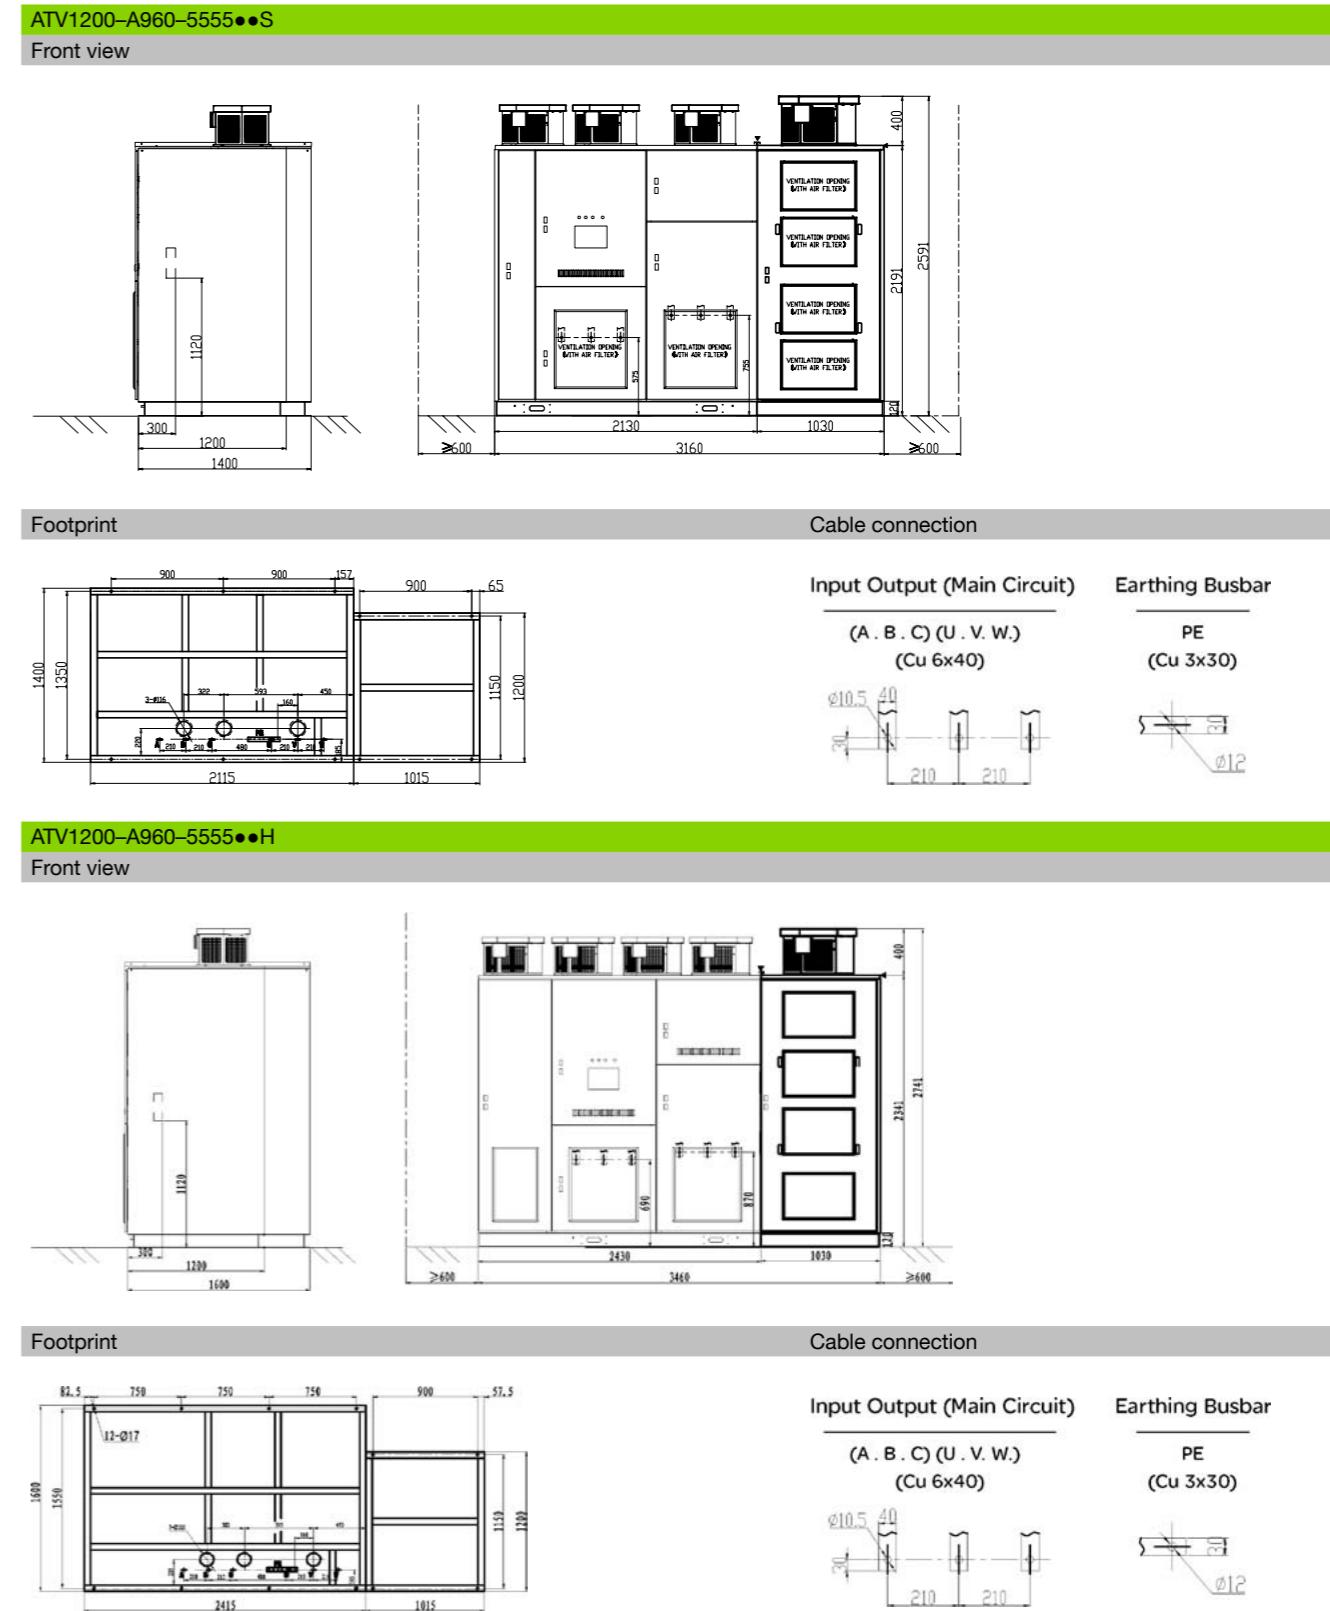

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A1090-5555••• |
| Nominal data | |
| Type rating [kVA] | 1090 |
| Motor power [kW] | 911 |
| Continuous output current [A] | |
| With 120 % overload | 114 |
| With 150 % overload | 91 |
| Max. output current [A] | |
| 1 min/10 min | 137 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 36 (incl. fan power) |
| High efficiency | ≤ 32 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 16500 |
| High efficiency | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 4100 |
| High efficiency | 5000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3660x1400x2520 |
| High efficiency | 3960x1600x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

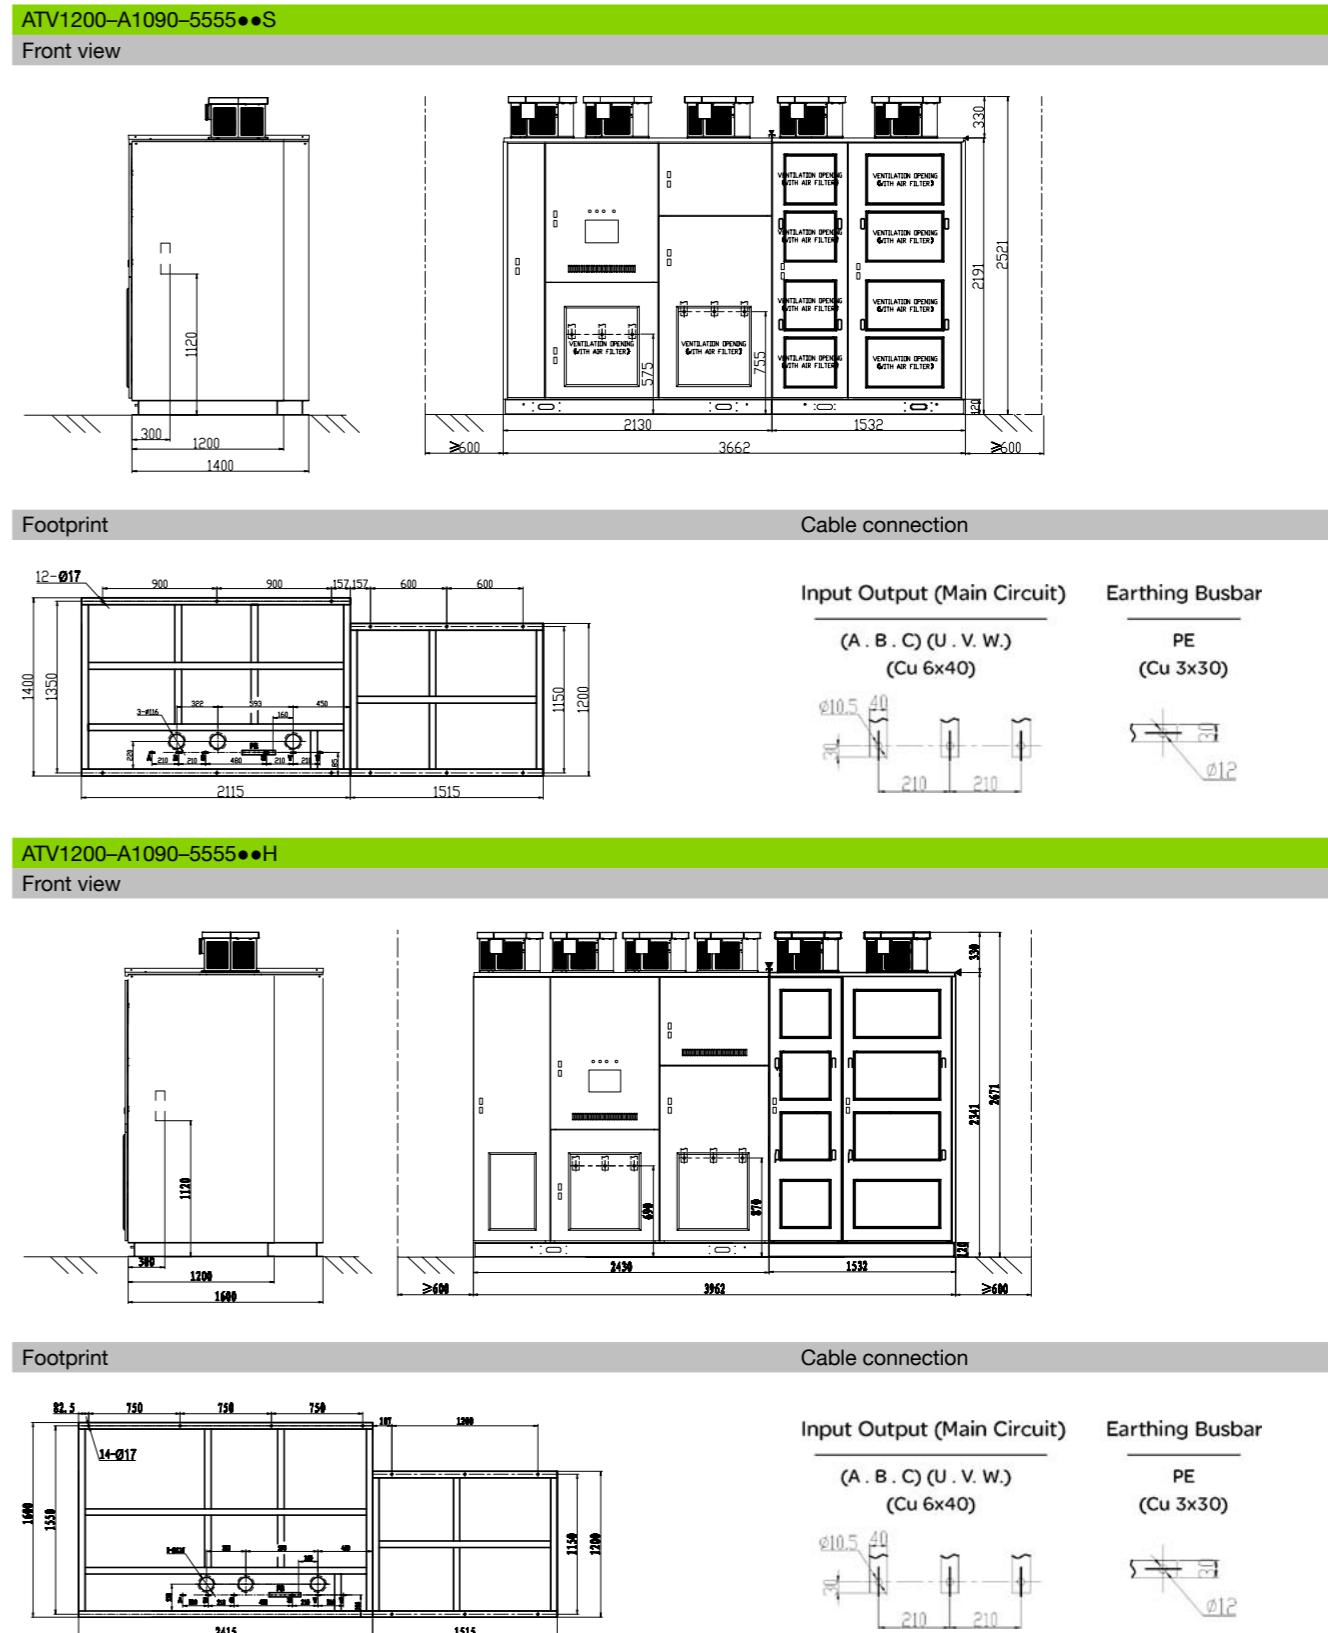

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A1290-5555••• |
| Nominal data | |
| Type rating [kVA] | 1290 |
| Motor power [kW] | 1078 |
| Continuous output current [A] | |
| With 120 % overload | 135 |
| With 150 % overload | 108 |
| Max. output current [A] | |
| 1 min/10 min | 162 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 43 (incl. fan power) |
| High efficiency | ≤ 38 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 16500 |
| High efficiency | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5100 |
| High efficiency | 5800 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3660x1500x2670 |
| High efficiency | 3960x1600x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

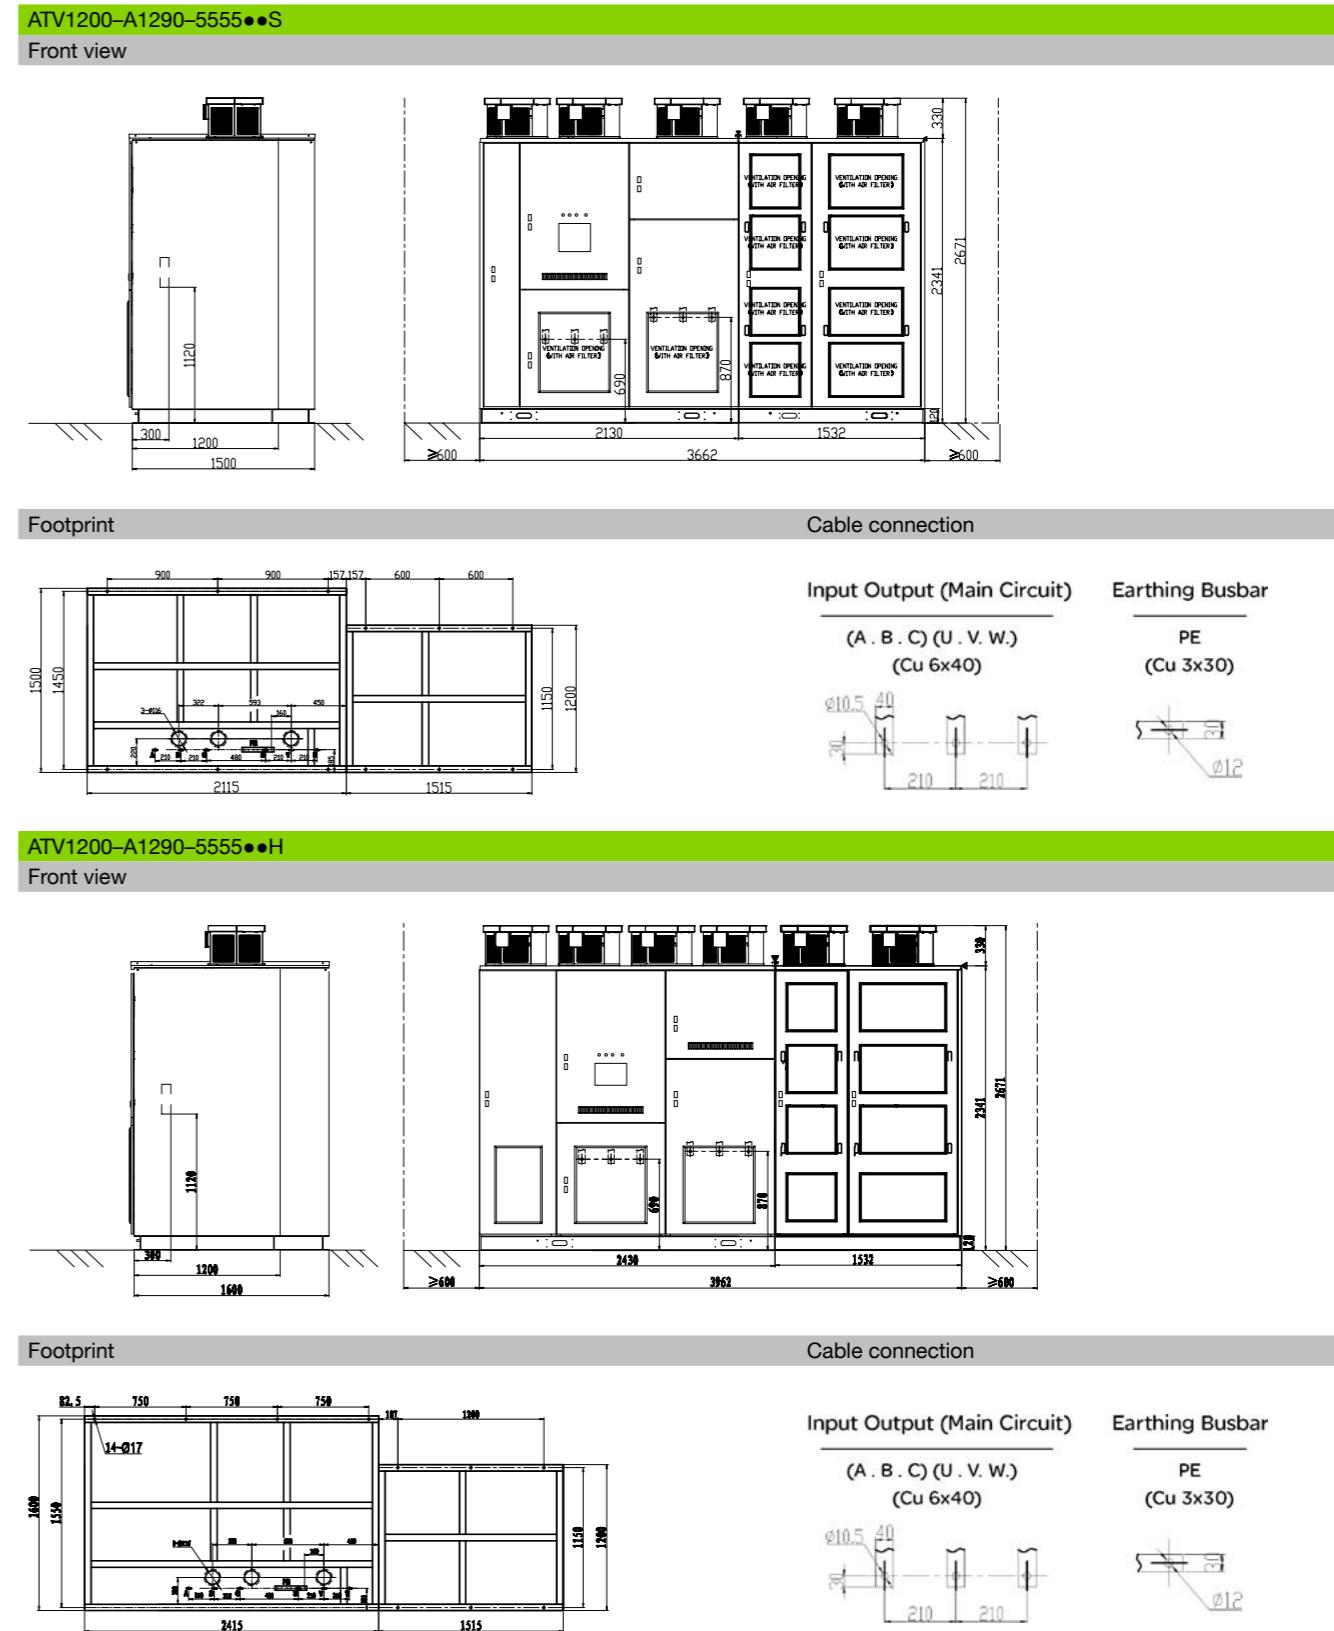

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A1430-5555••• |
| Nominal data | |
| Type rating [kVA] | 1430 |
| Motor power [kW] | 1195 |
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 48 (incl. fan power) |
| High efficiency | ≤ 42 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5300 |
| High efficiency | 6000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3660x1500x2820 |
| High efficiency | 3960x1600x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

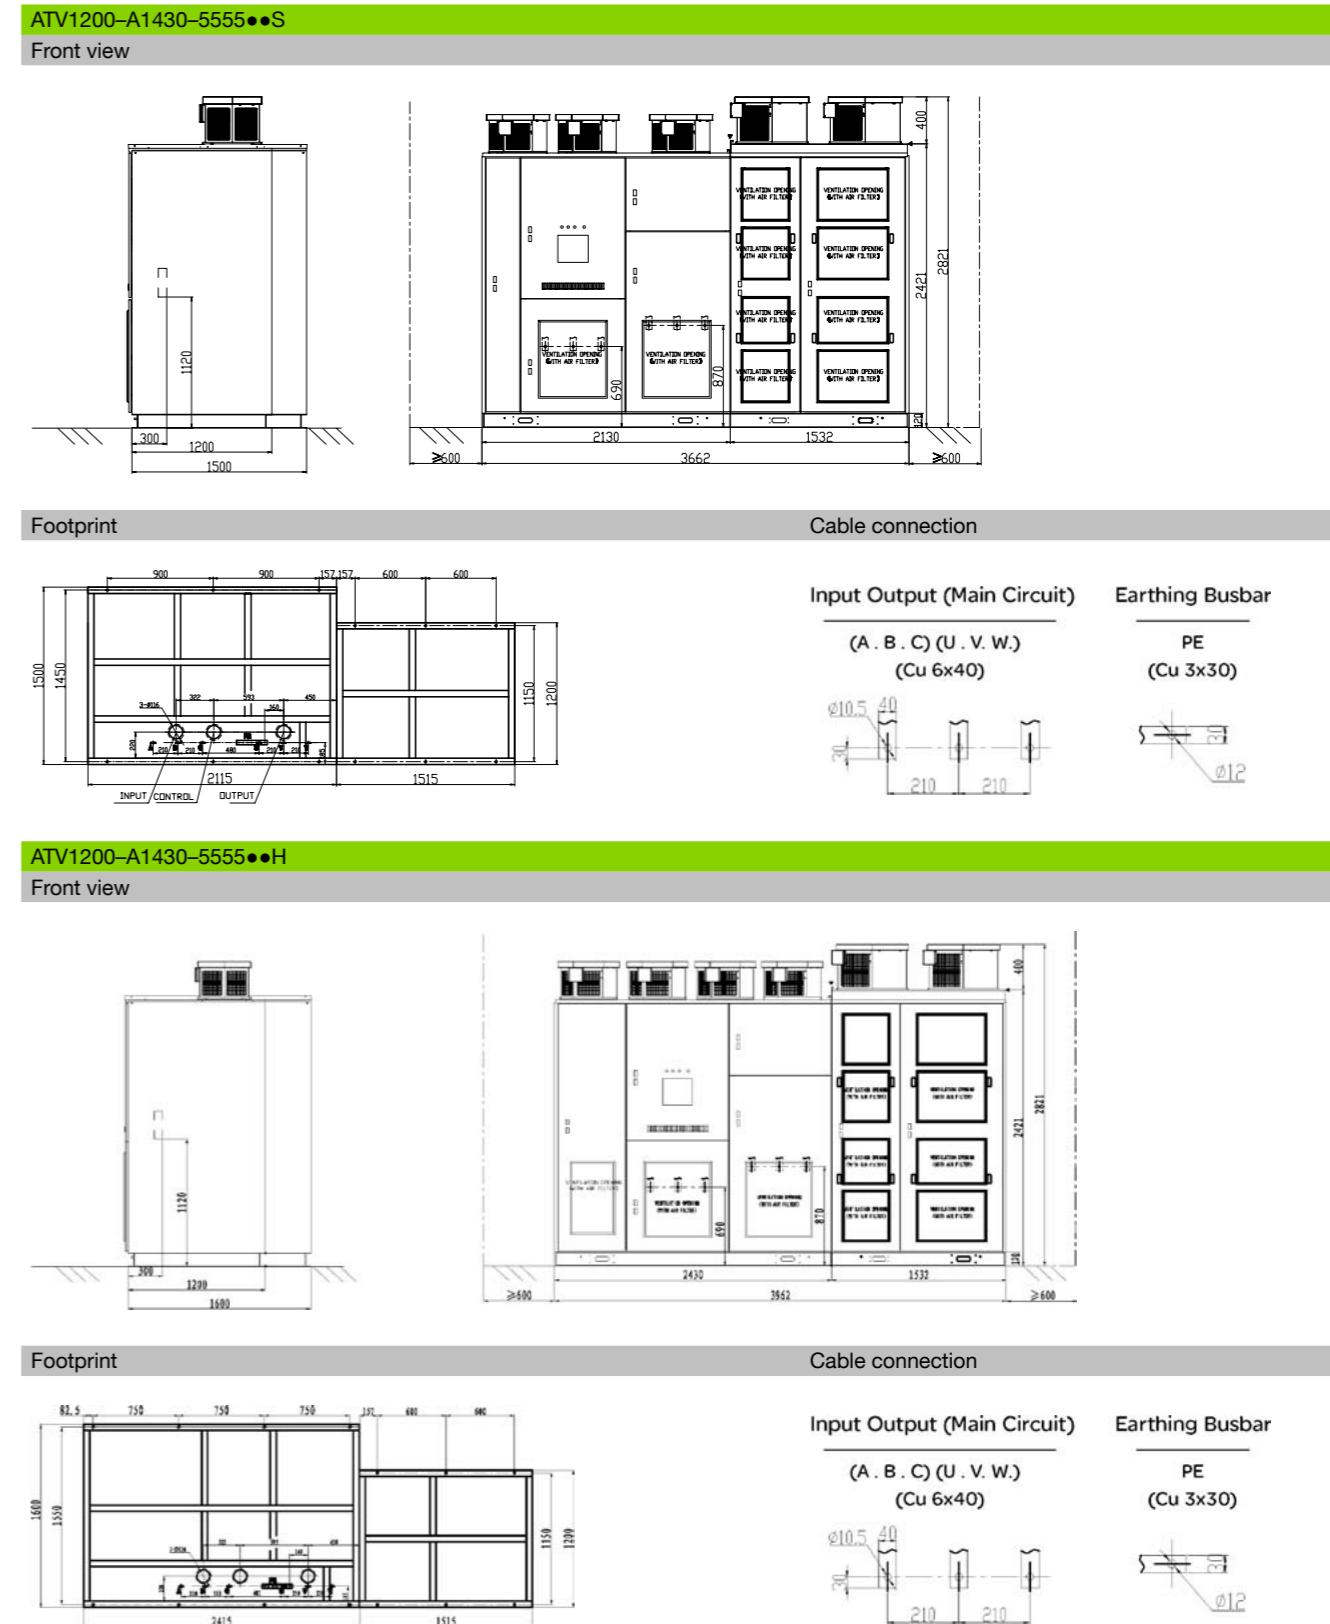

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A1610-5555••• |
| Nominal data | |
| Type rating [kVA] | 1610 |
| Motor power [kW] | 1346 |
| Continuous output current [A] | |
| With 120 % overload | 168 |
| With 150 % overload | 135 |
| Max. output current [A] | |
| 1 min/10 min | 202 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 54 (incl. fan power) |
| High efficiency | ≤ 47 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 19800 |
| High efficiency | 23100 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5500 |
| High efficiency | 6600 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4360x1500x2670 |
| High efficiency | 4660x1600x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

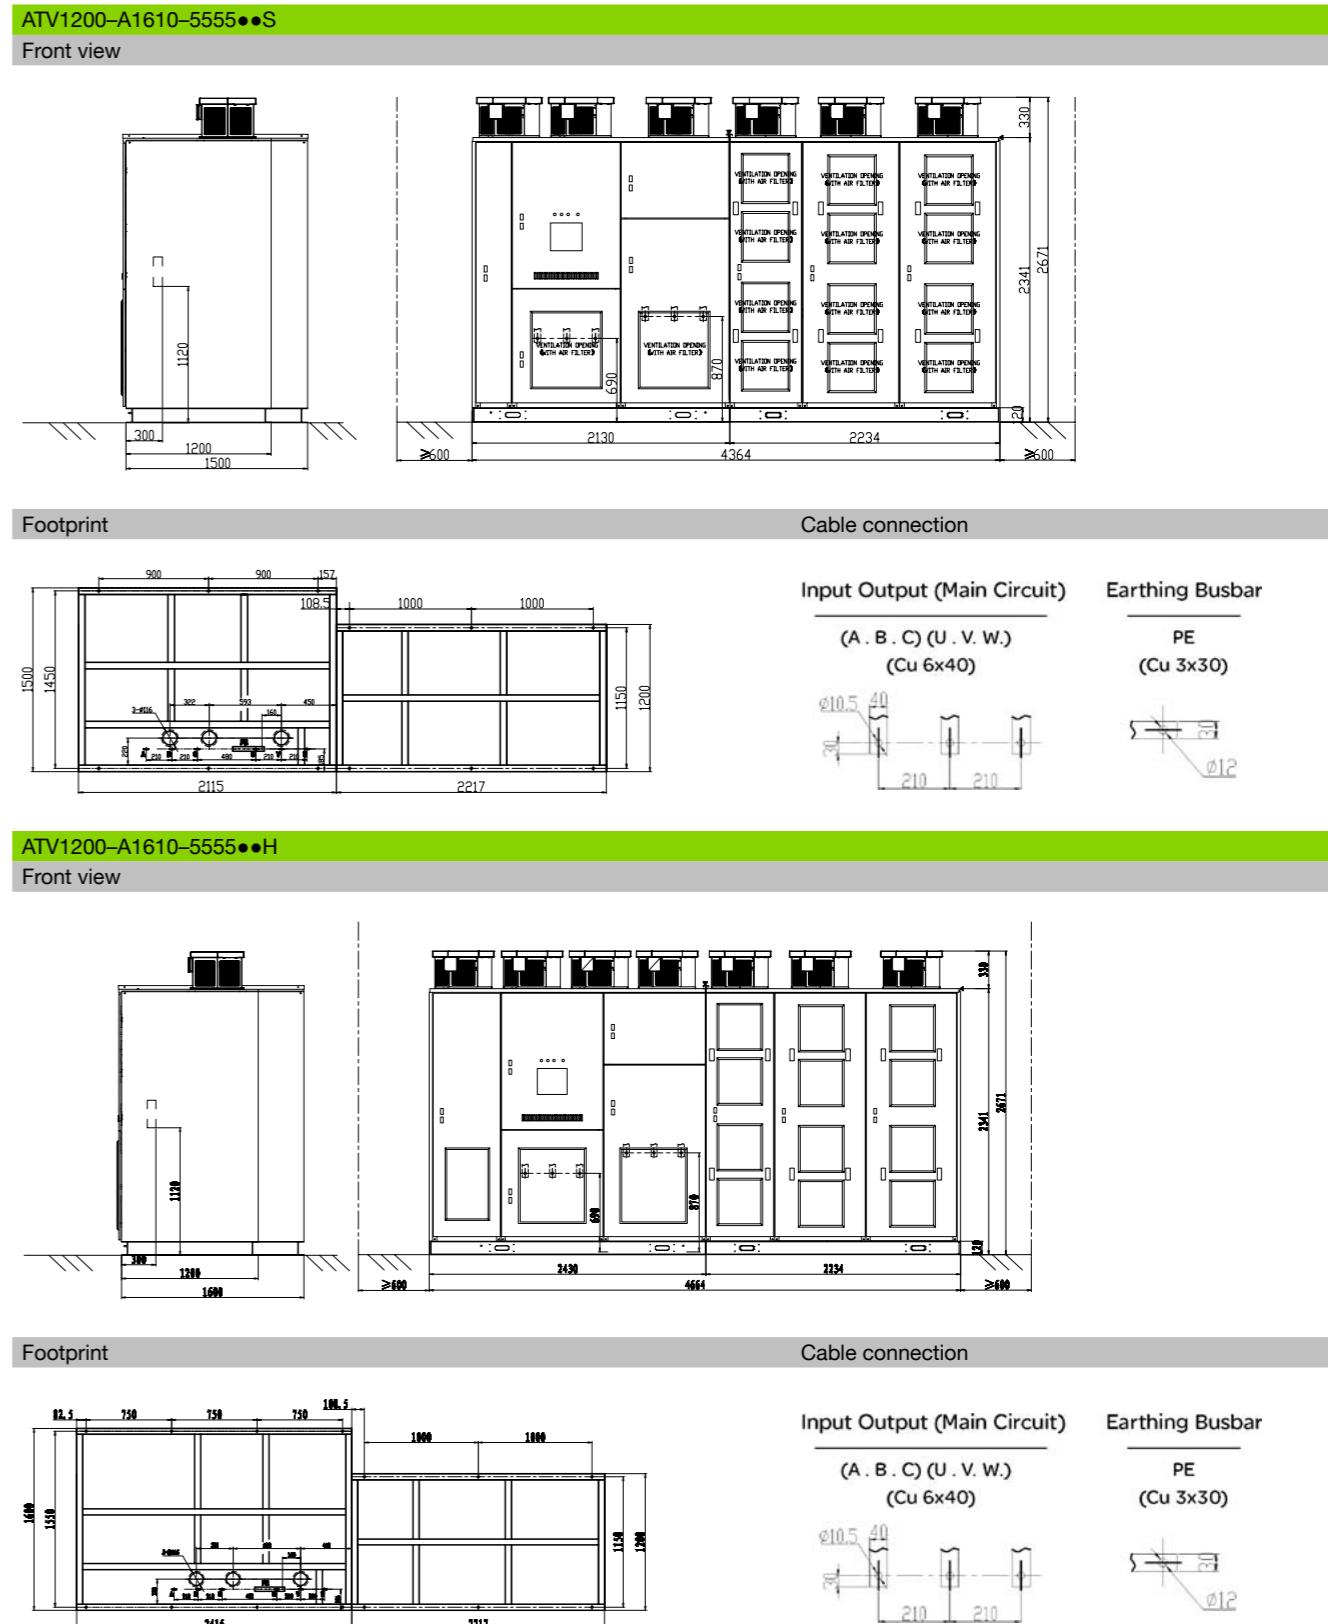

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A1910-5555••• |
| Nominal data | |
| Type rating [kVA] | 1910 |
| Motor power [kW] | 1597 |
| Continuous output current [A] | |
| With 120 % overload | 200 |
| With 150 % overload | 160 |
| Max. output current [A] | |
| 1 min/10 min | 240 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 64 (incl. fan power) |
| High efficiency | ≤ 56 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 23100 |
| High efficiency | 23100 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 6600 |
| High efficiency | 7500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4660x1500x2670 |
| High efficiency | 4960x1700x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

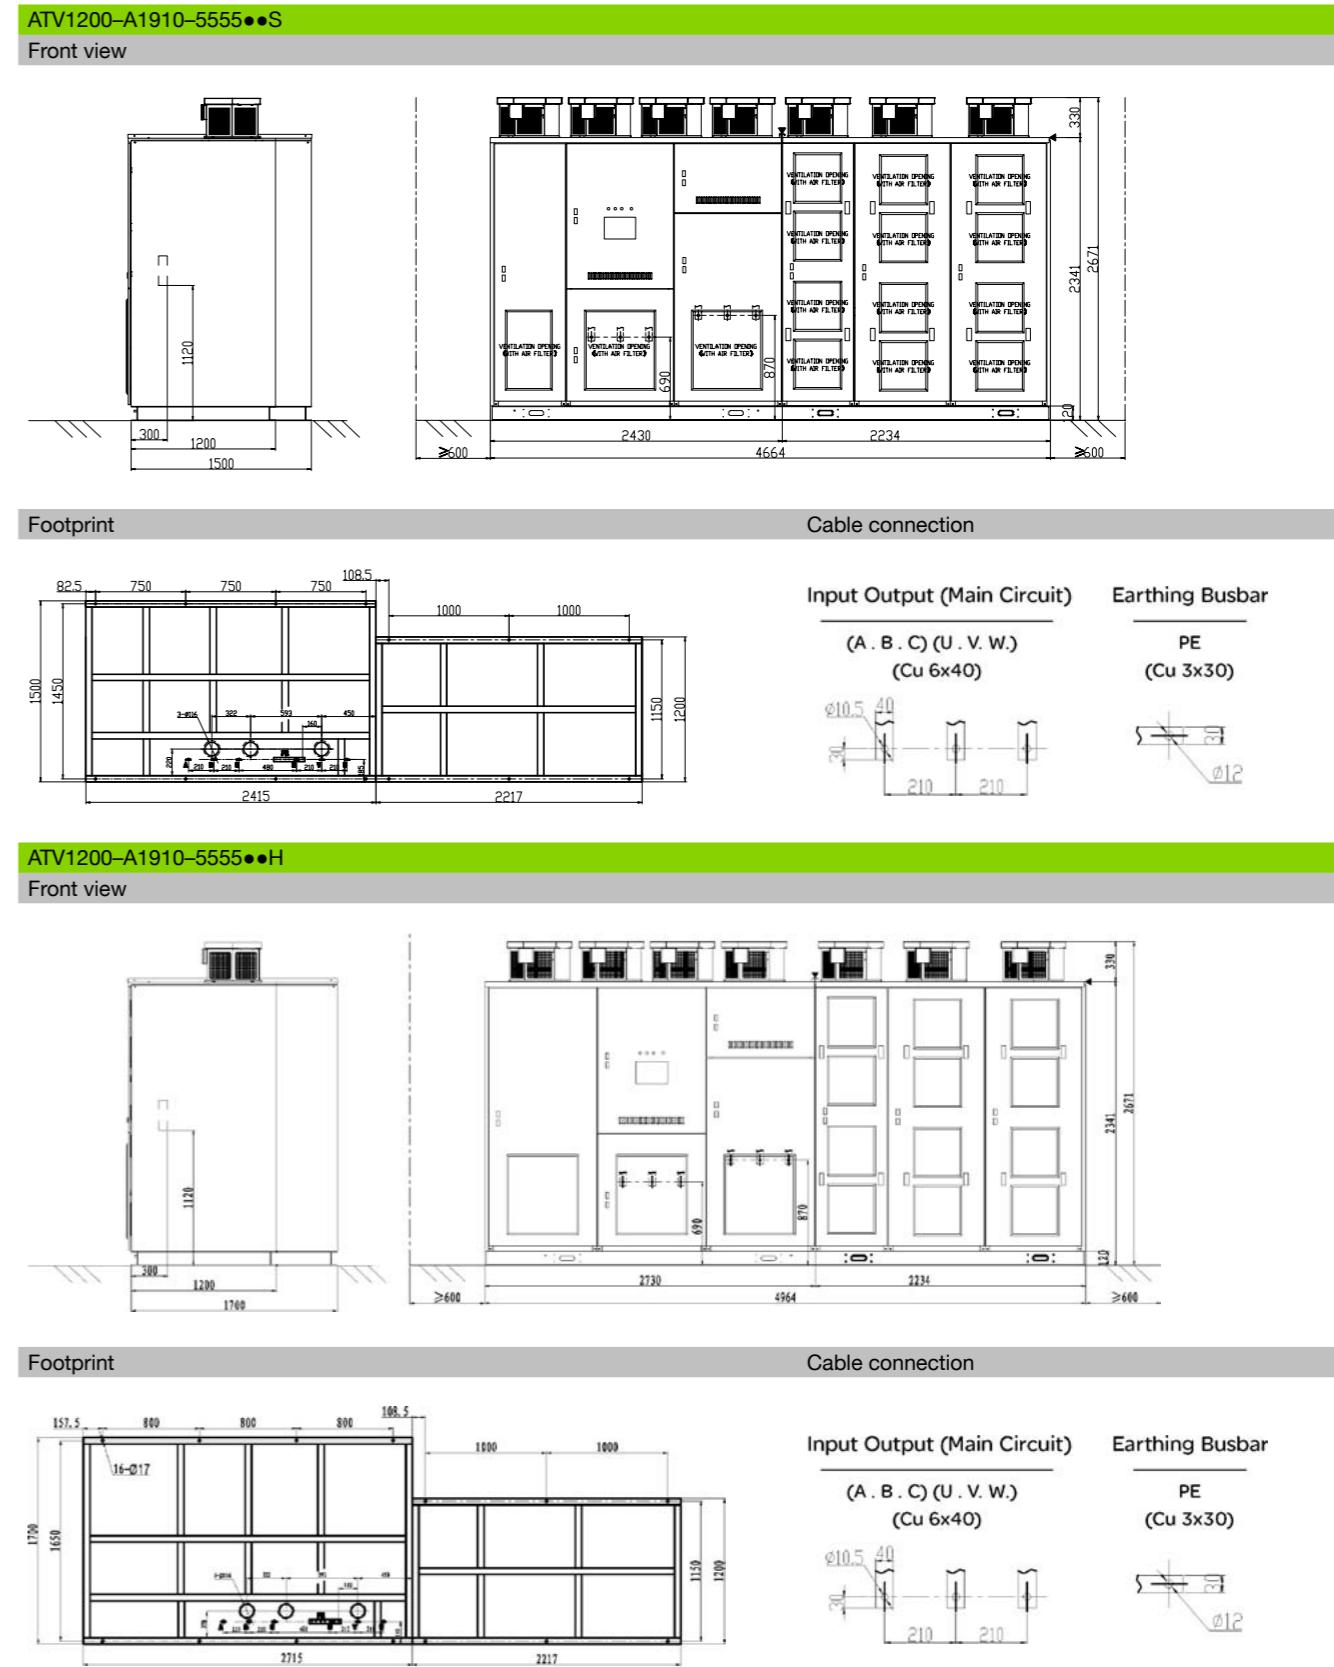

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A2100-5555••• | A2300-5555••• |
| Nominal data | | |
| Type rating [kVA] | 2100 | 2300 |
| Motor power [kW] | 1756 | 1923 |
| Continuous output current [A] | | |
| With 120 % overload | 220 | 241 |
| With 150 % overload | 176 | 192 |
| Max. output current [A] | | |
| 1 min/10 min | 264 | 289 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 70 (incl. fan power) | ≤ 77 (incl. fan power) |
| High efficiency | ≤ 61 (incl. fan power) | ≤ 67 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 23100 | 23100 |
| High efficiency | 23100 | 23100 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 6900 | 7200 |
| High efficiency | 7900 | 8400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 4660x1600x2670 | 4660x1600x2670 |
| High efficiency | 4960x1700x2670 | 4960x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

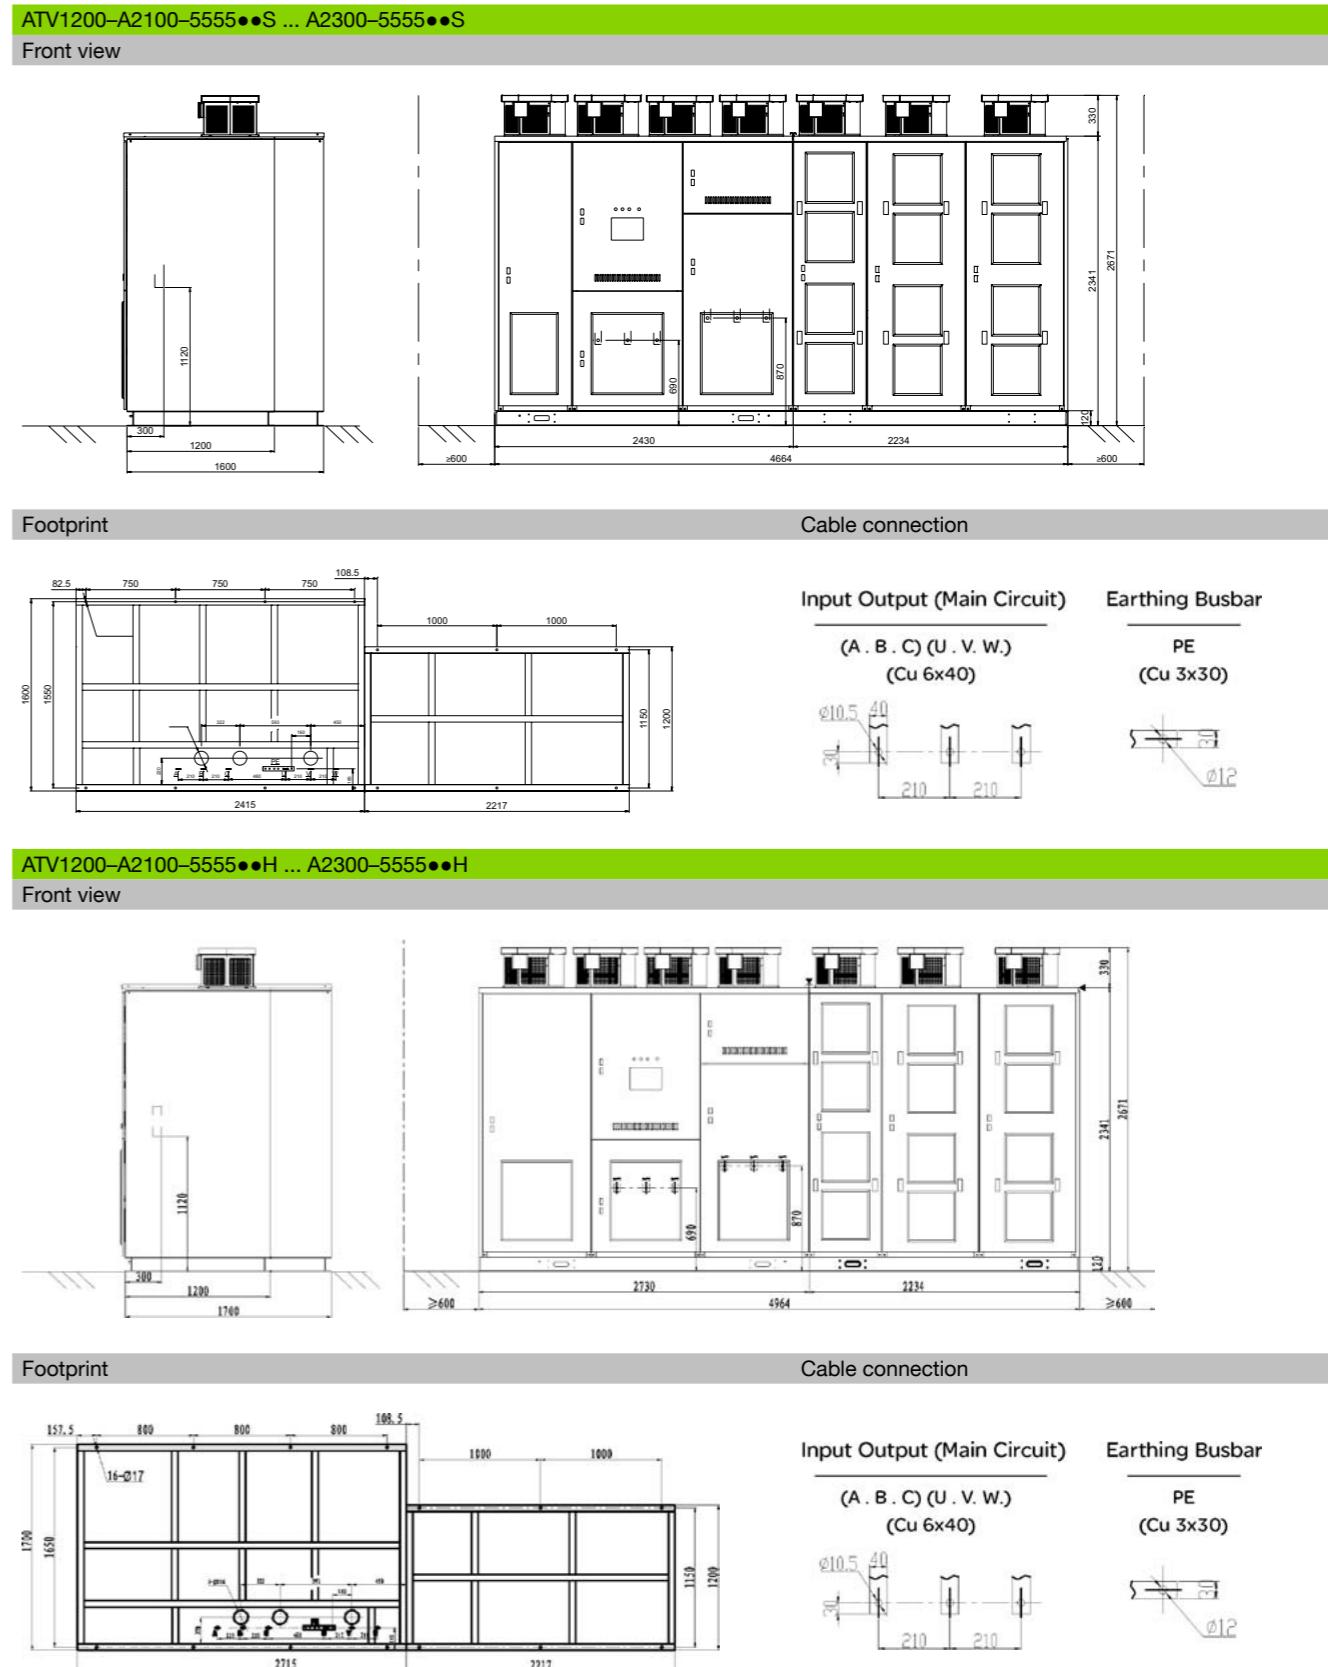

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

Technical data for output voltage 5.5 kV

ATV1200 | A2670-5555•••

Nominal data

Type rating [kVA]

2670

Motor power [kW]

2232

Continuous output current [A]

With 120 % overload

280

With 150 % overload

224

Max. output current [A]

1 min/10 min

336

Power cells

Number of cells per phase

5

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 89
(incl. fan power)

High efficiency

≤ 78
(incl. fan power)

Air flow [m³/h]

Standard efficiency

High efficiency

43200

43200

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

7800

High efficiency

9000

Dimension[mm] W*D*H

Standard efficiency

4660x1600x2820

High efficiency

4960x1700x2820

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 5.5 kV

ATV1200-A2670-5555••S



Front view

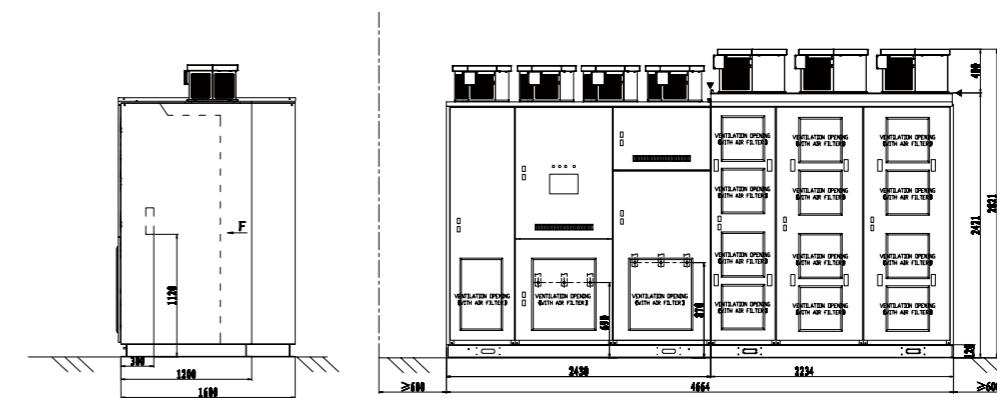

Footprint

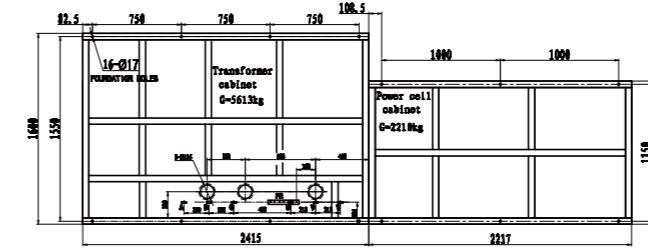


Cable connection

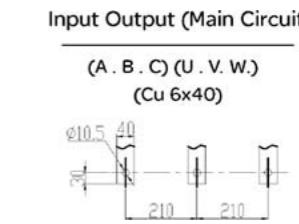


ATV1200-A2670-5555••H



Front view

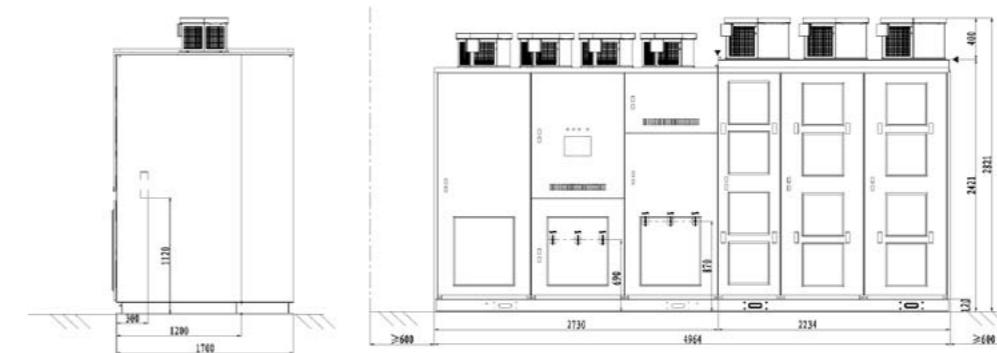

Footprint

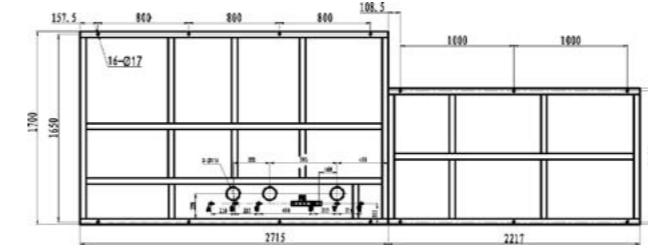

Cable connection

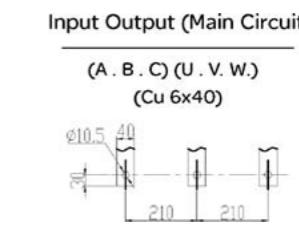

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

Technical data for output voltage 5.5 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2870-5555••• | A3050-5555••• |
| Nominal data | | |
| Type rating [kVA] | 2870 | 3050 |
| Motor power [kW] | 2399 | 2550 |
| Continuous output current [A] | | |
| With 120 % overload | 301 | 320 |
| With 150 % overload | 241 | 256 |
| Max. output current [A] | | |
| 1 min/10 min | 361 | 384 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 96 (incl. fan power) | ≤ 102 (incl. fan power) |
| High efficiency | ≤ 84 (incl. fan power) | ≤ 89 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 29700 | 29700 |
| High efficiency | 29700 | 29700 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 8100 | 10000 |
| High efficiency | 9200 | 10800 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5770x1600x2670 | 5770x1600x2670 |
| High efficiency | 6070x1700x2670 | 6070x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 5.5 kV

ATV1200-A2870-5555••S ... A3050-5555••S


Front view

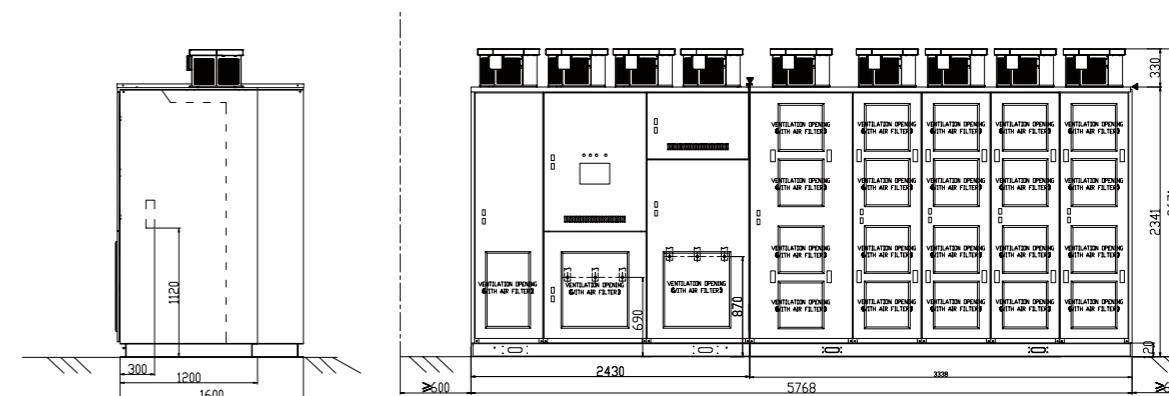

Footprint

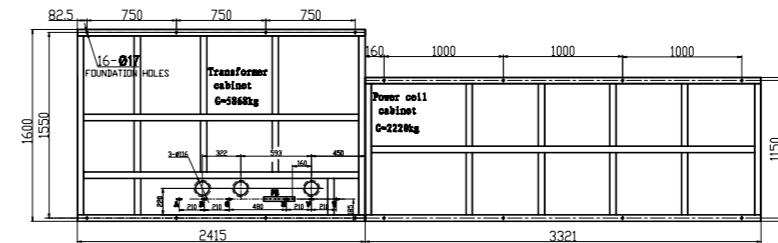


Cable connection

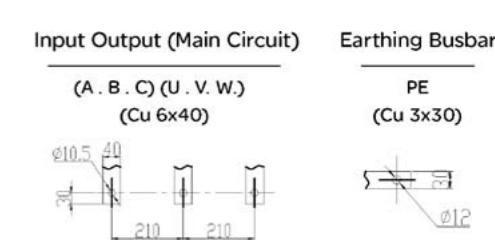


ATV1200-A2870-5555••H ... A3050-5555••H


Front view

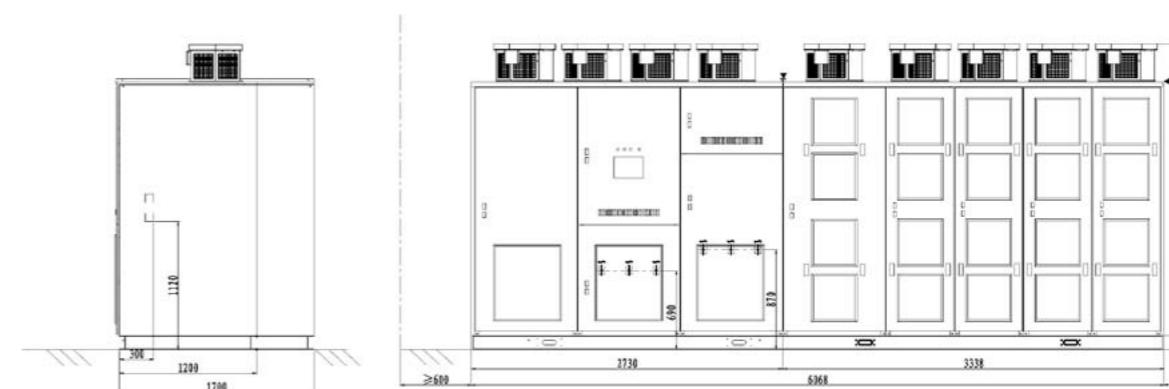

Footprint

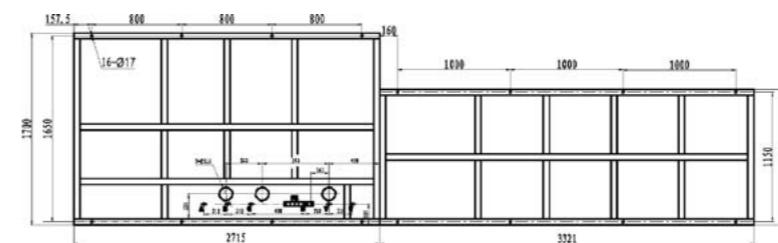

Cable connection

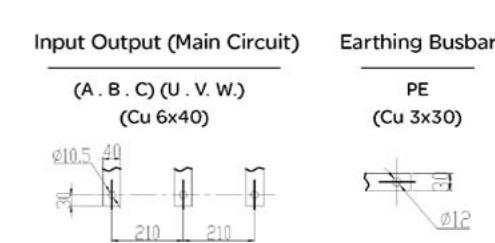

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A3210-5555••• |
| Nominal data | |
| Type rating [kVA] | 3210 |
| Motor power [kW] | 2684 |
| Continuous output current [A] | |
| With 120 % overload | 337 |
| With 150 % overload | 269 |
| Max. output current [A] | |
| 1 min/10 min | 404 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 107 (incl. fan power) |
| High efficiency | ≤ 94 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29700 |
| High efficiency | 29700 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 10300 |
| High efficiency | 11000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6070x1700x2670 |
| High efficiency | 6070x1700x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

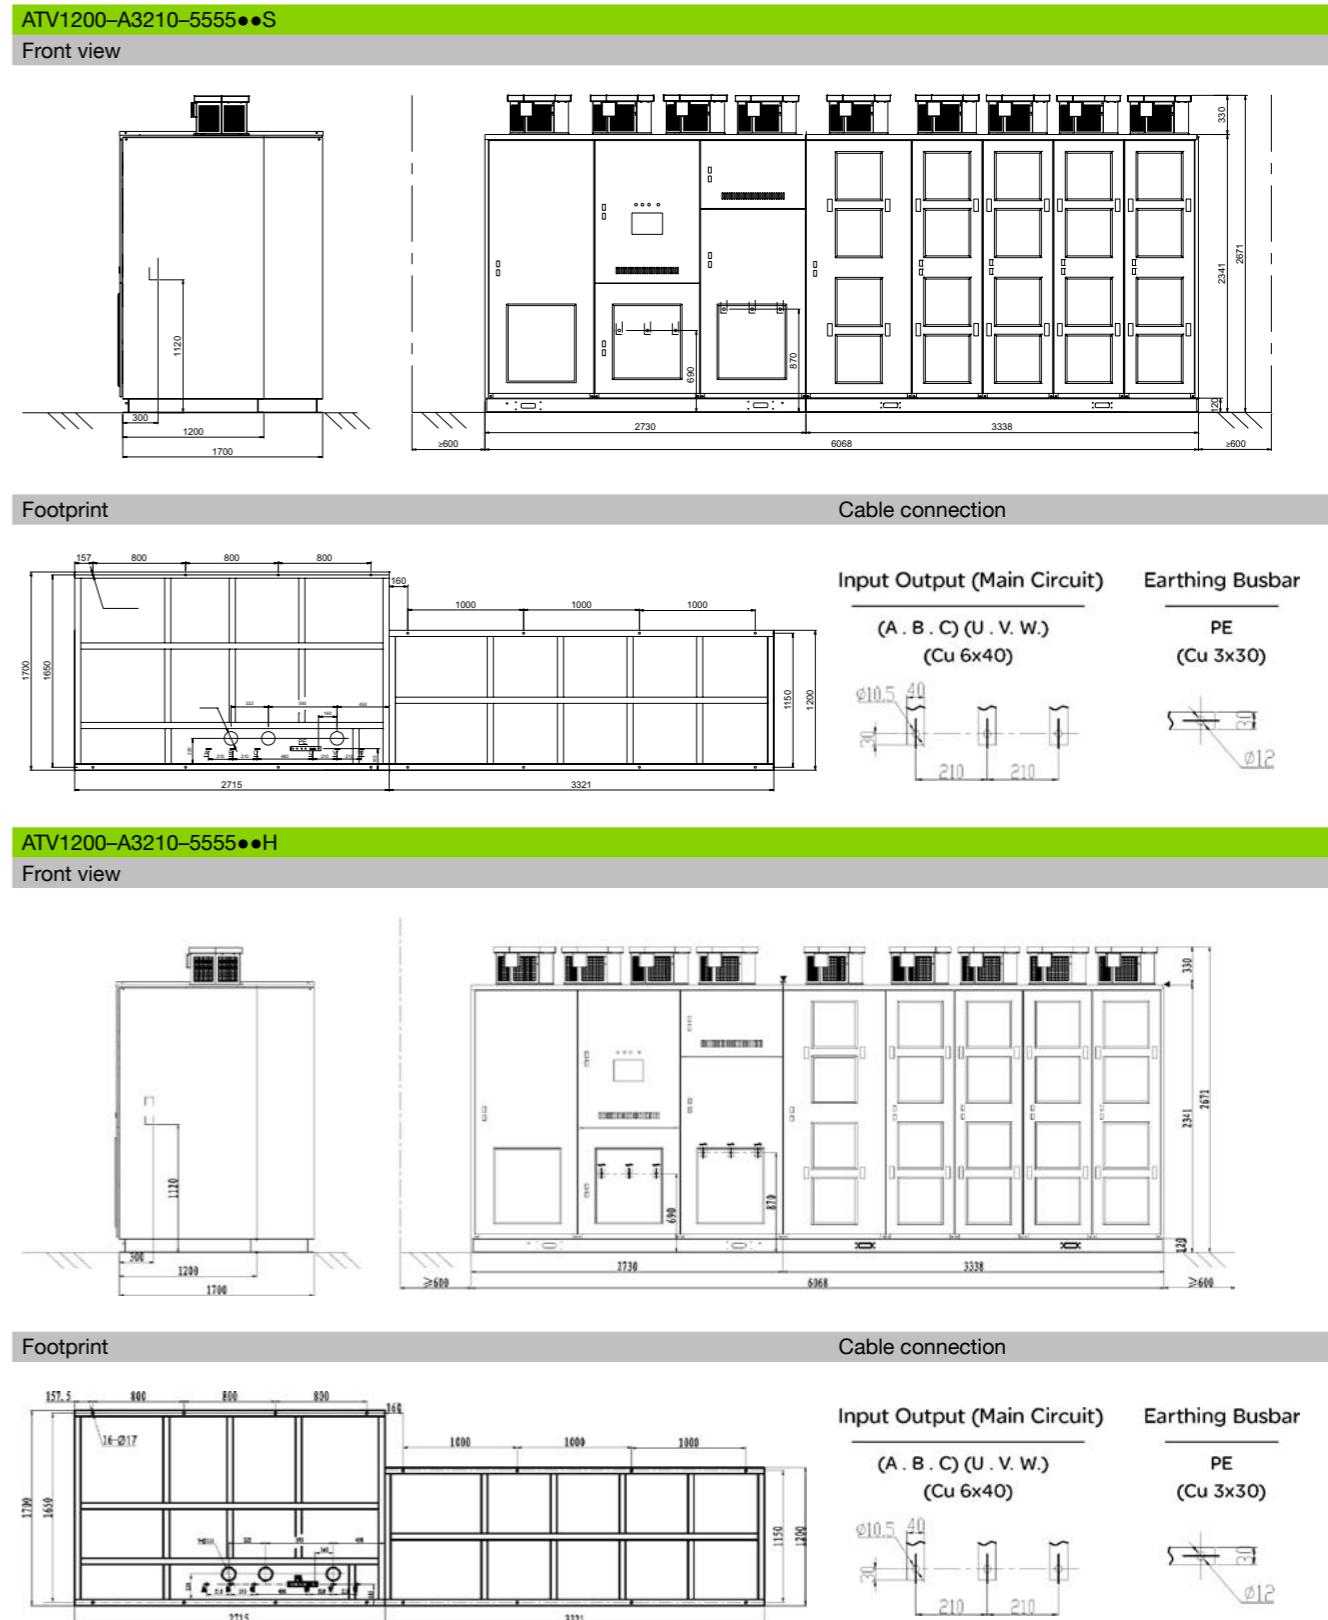

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A3610-5555••• |
| Nominal data | |
| Type rating [kVA] | 3610 |
| Motor power [kW] | 3018 |
| Continuous output current [A] | |
| With 120 % overload | 379 |
| With 150 % overload | 303 |
| Max. output current [A] | |
| 1 min/10 min | 455 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 121 (incl. fan power) |
| High efficiency | ≤ 106 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29700 |
| High efficiency | 29700 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 10900 |
| High efficiency | 11600 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6070x1700x2670 |
| High efficiency | 6070x1700x2970 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

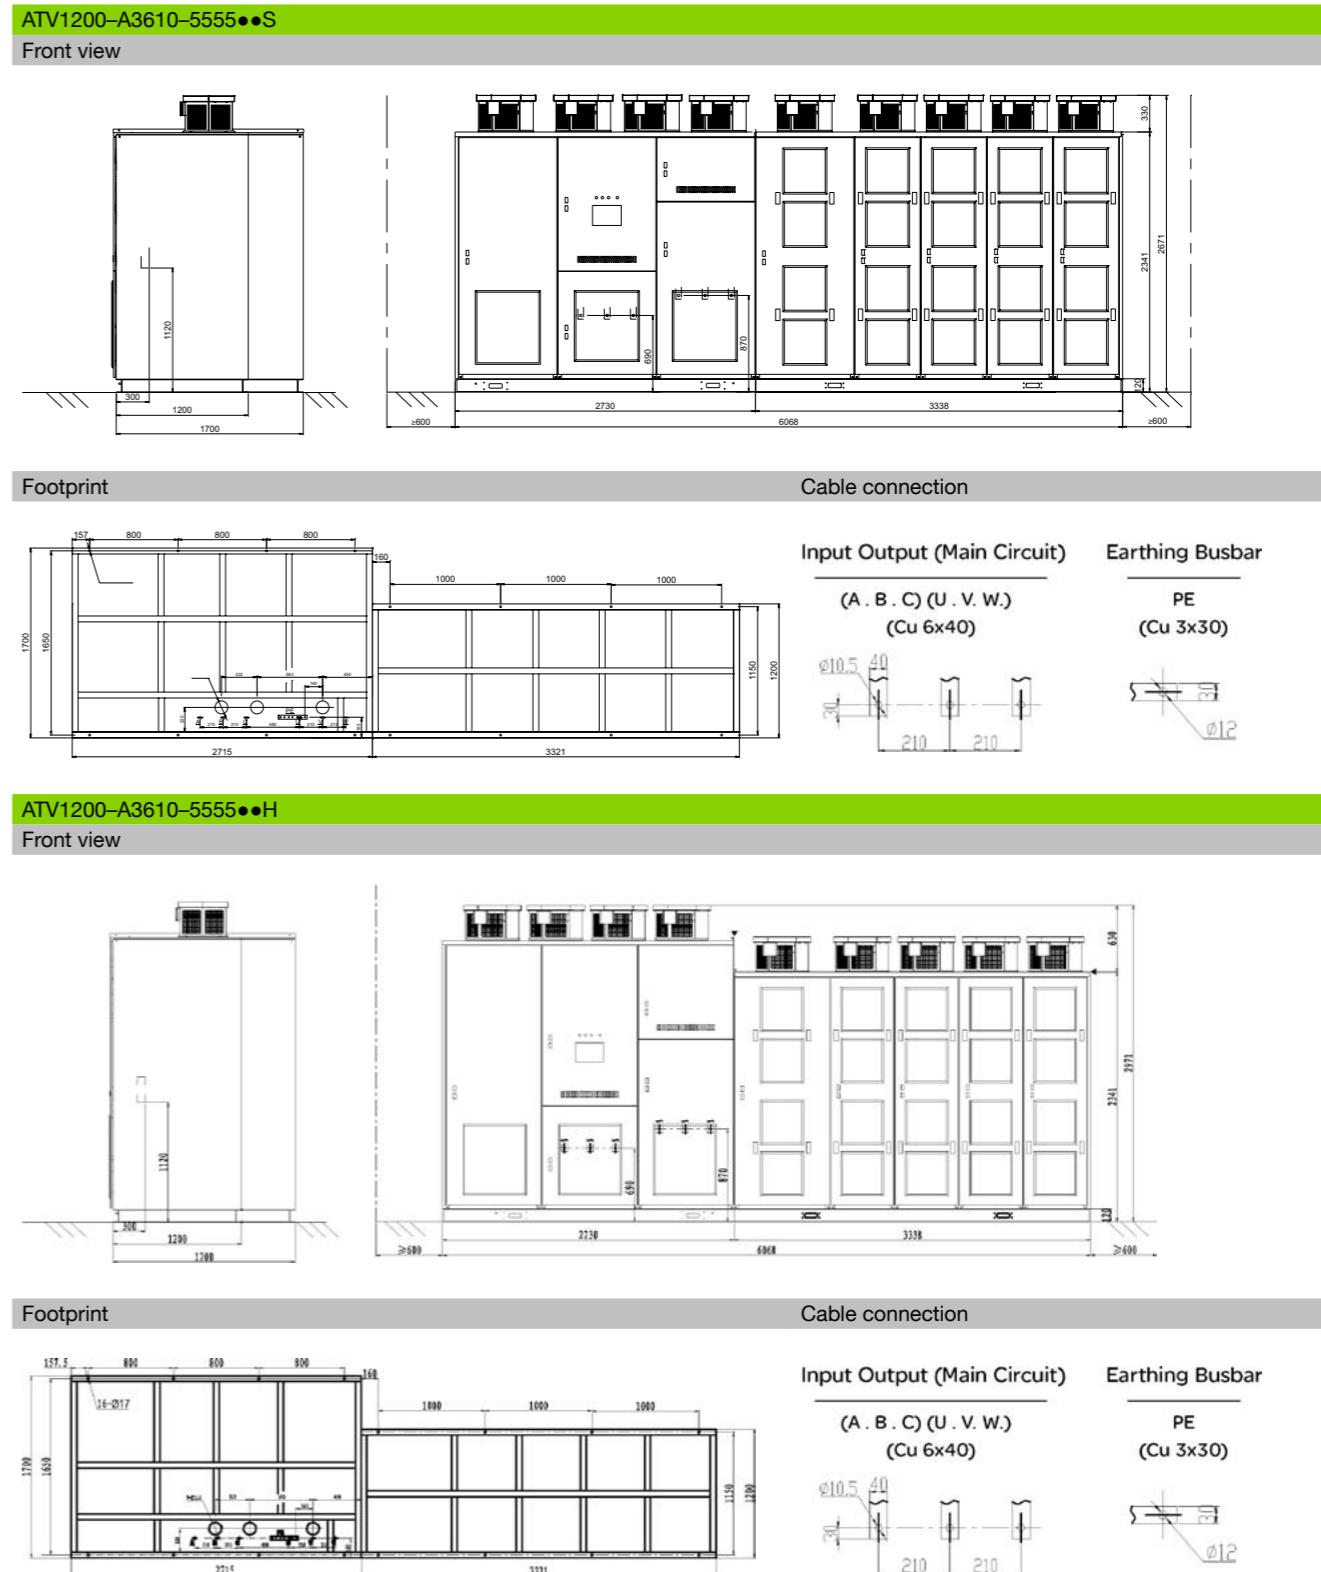

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

Technical data for output voltage 5.5 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A3910-5555••• | A4100-5555••• |
| Nominal data | | |
| Type rating [kVA] | 3910 | 4100 |
| Motor power [kW] | 3269 | 3428 |
| Continuous output current [A] | | |
| With 120 % overload | 410 | 430 |
| With 150 % overload | 328 | 344 |
| Max. output current [A] | | |
| 1 min/10 min | 492 | 516 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96.1 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 131 (incl. fan power) | ≤ 134 (incl. fan power) |
| High efficiency | ≤ 114 (incl. fan power) | ≤ 120 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 46500 | 46500 |
| High efficiency | 46500 | 46500 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 11100 | 11300 |
| High efficiency | 12200 | 12400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6070x1700x2740 | 6070x1700x2740 |
| High efficiency | 6370x1800x3040 | 6370x1800x3040 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 5.5 kV

ATV1200-A3910-5555••S ... A4100-5555••S


Front view

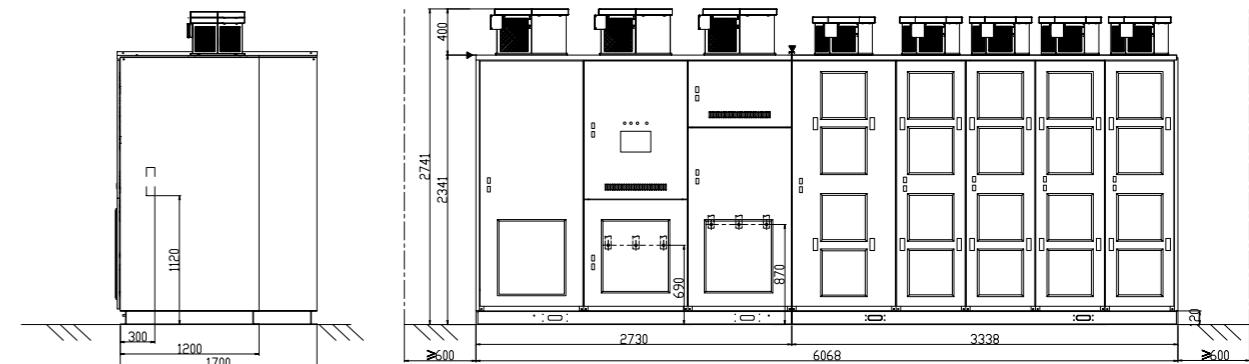

Footprint

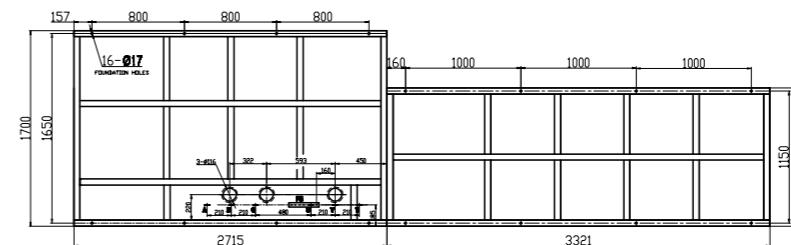


Cable connection

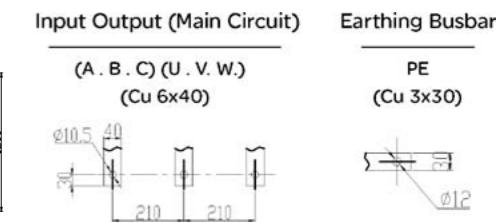


ATV1200-A3910-5555••H ... A4100-5555••H


Front view

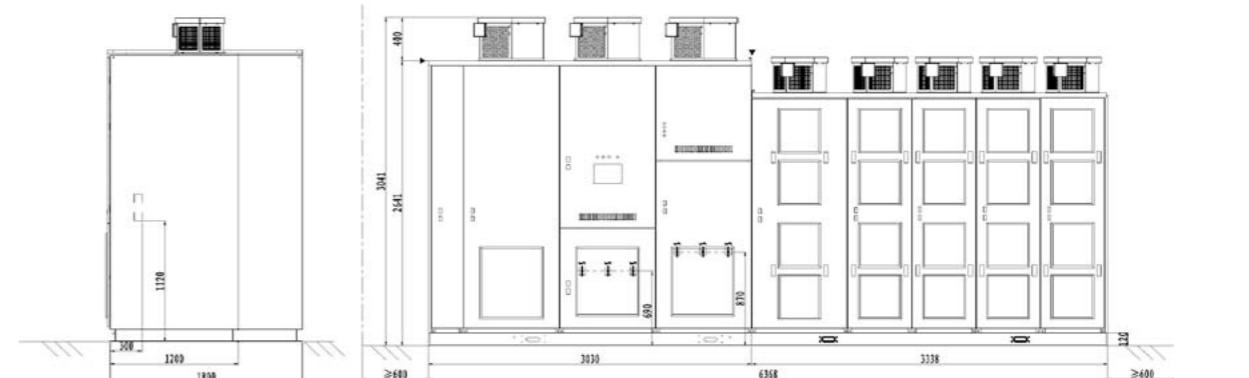

Footprint

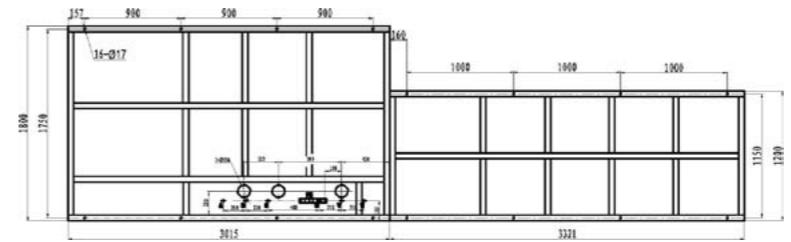

Cable connection

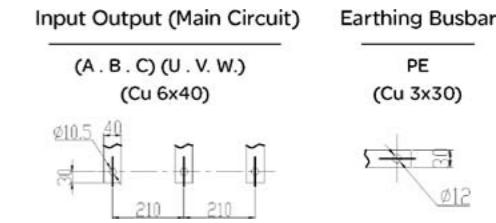

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

Technical data for output voltage 5.5 kV

ATV1200 | A4680-5555•••

Nominal data

Type rating [kVA]

4680

Motor power [kW]

3912

Continuous output current [A]

With 120 % overload

490

With 150 % overload

392

Max. output current [A]

1 min/10 min

588

Power cells

Number of cells per phase

5

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96.2
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 149
(incl. fan power)

High efficiency

≤ 137
(incl. fan power)

Air flow [m³/h]

Standard efficiency

70000

High efficiency

70000

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

12500

High efficiency

13100

Dimension[mm] W*D*H

Standard efficiency

6070x1700x2820

High efficiency

6370x1800x3040

Connection

Incoming cable

Type

standard symmetrical

see drawing

Motor cable

Type

3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 5.5 kV

ATV1200-A4680-5555••S

Front view

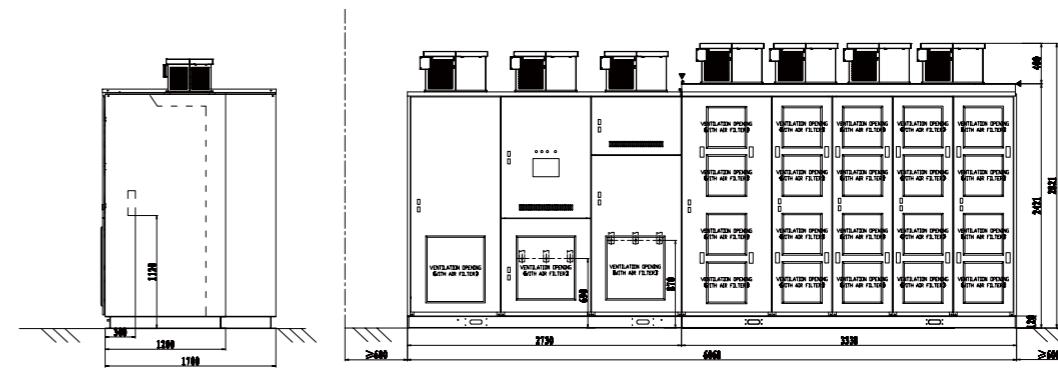


Footprint

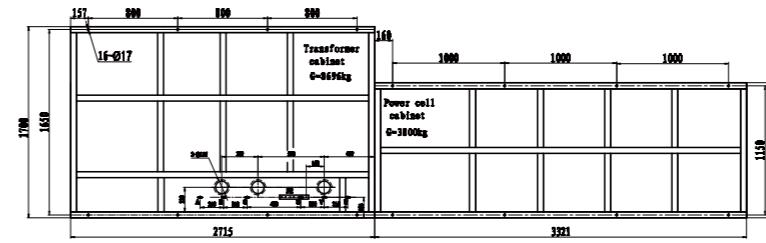


ATV1200-A4680-5555••H

Front view

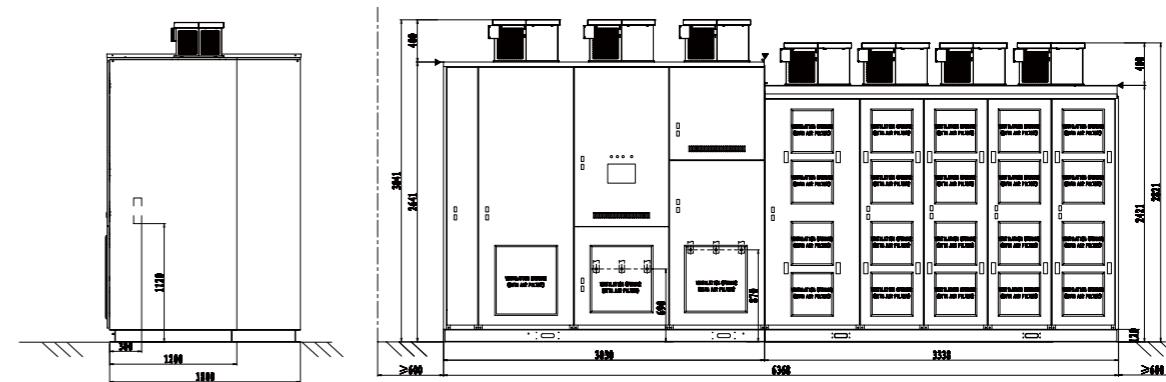

Footprint

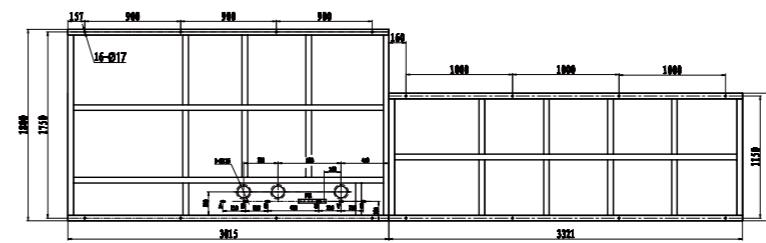

Cable connection

Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)

Ø10.5 40
210 210

Earthing Busbar

PE
(Cu 3x30)

Ø12

Cable connection

Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)

Ø10.5 40
210 210

Earthing Busbar

PE
(Cu 3x30)

Ø12

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A5250-5555••• | A5810-5555••• |
| Nominal data | | |
| Type rating [kVA] | 5250 | 5810 |
| Motor power [kW] | 4389 | 4857 |
| Continuous output current [A] | | |
| With 120 % overload | 550 | 611 |
| With 150 % overload | 440 | 489 |
| Max. output current [A] | | |
| 1 min/10 min | 661 | 733 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.2 (incl. fan power) | ≥ 96.3 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 167 (incl. fan power) | ≤ 180 (incl. fan power) |
| High efficiency | ≤ 154 (incl. fan power) | ≤ 170 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 80000 | 80000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 15300 | 15600 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 7770x1800x3040 | 7770x1800x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

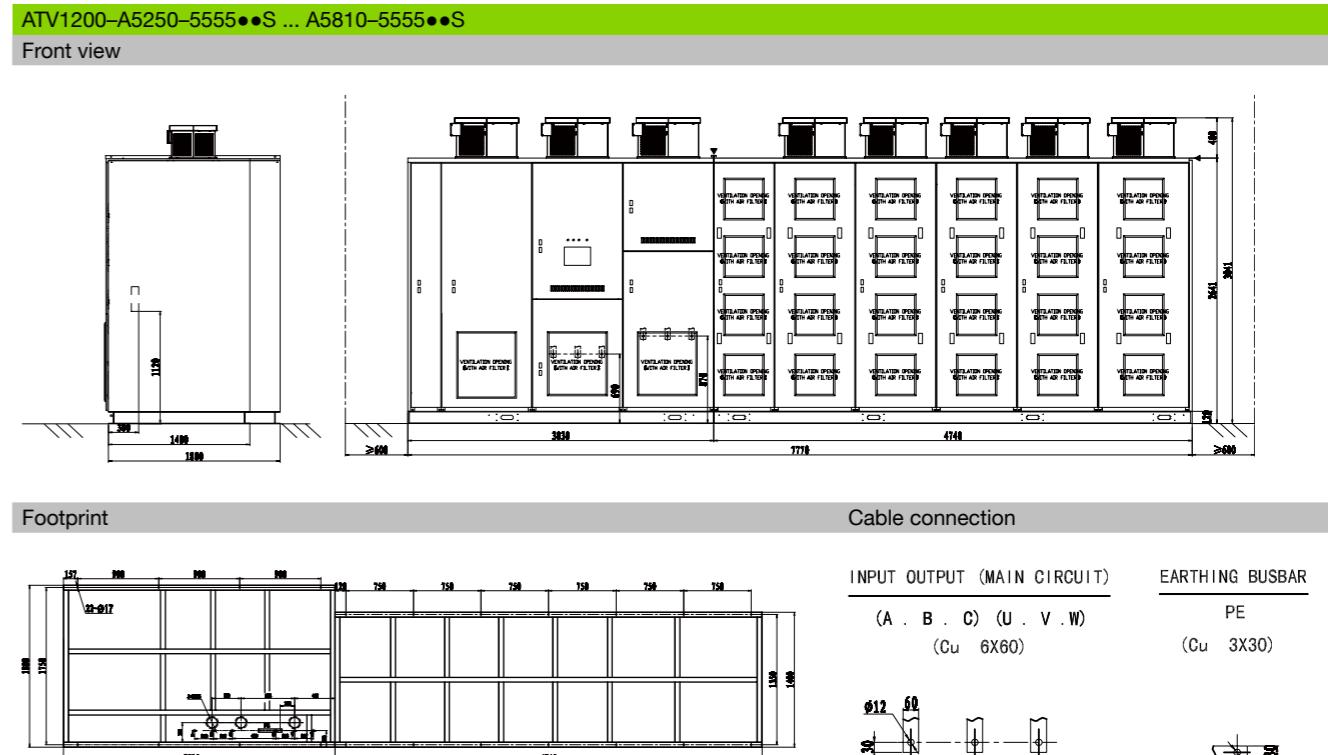

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | |
|--|-----------------------------|
| ATV1200 | A6300-5555••• |
| Nominal data | |
| Type rating [kVA] | 6300 |
| Motor power [kW] | 5267 |
| Continuous output current [A] | |
| With 120 % overload | 660 |
| With 150 % overload | 528 |
| Max. output current [A] | |
| 1 min/10 min | 792 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.4 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 190 (incl. fan power) |
| High efficiency | ≤ 184 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 80000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 16500 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 8670x1600x3040 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

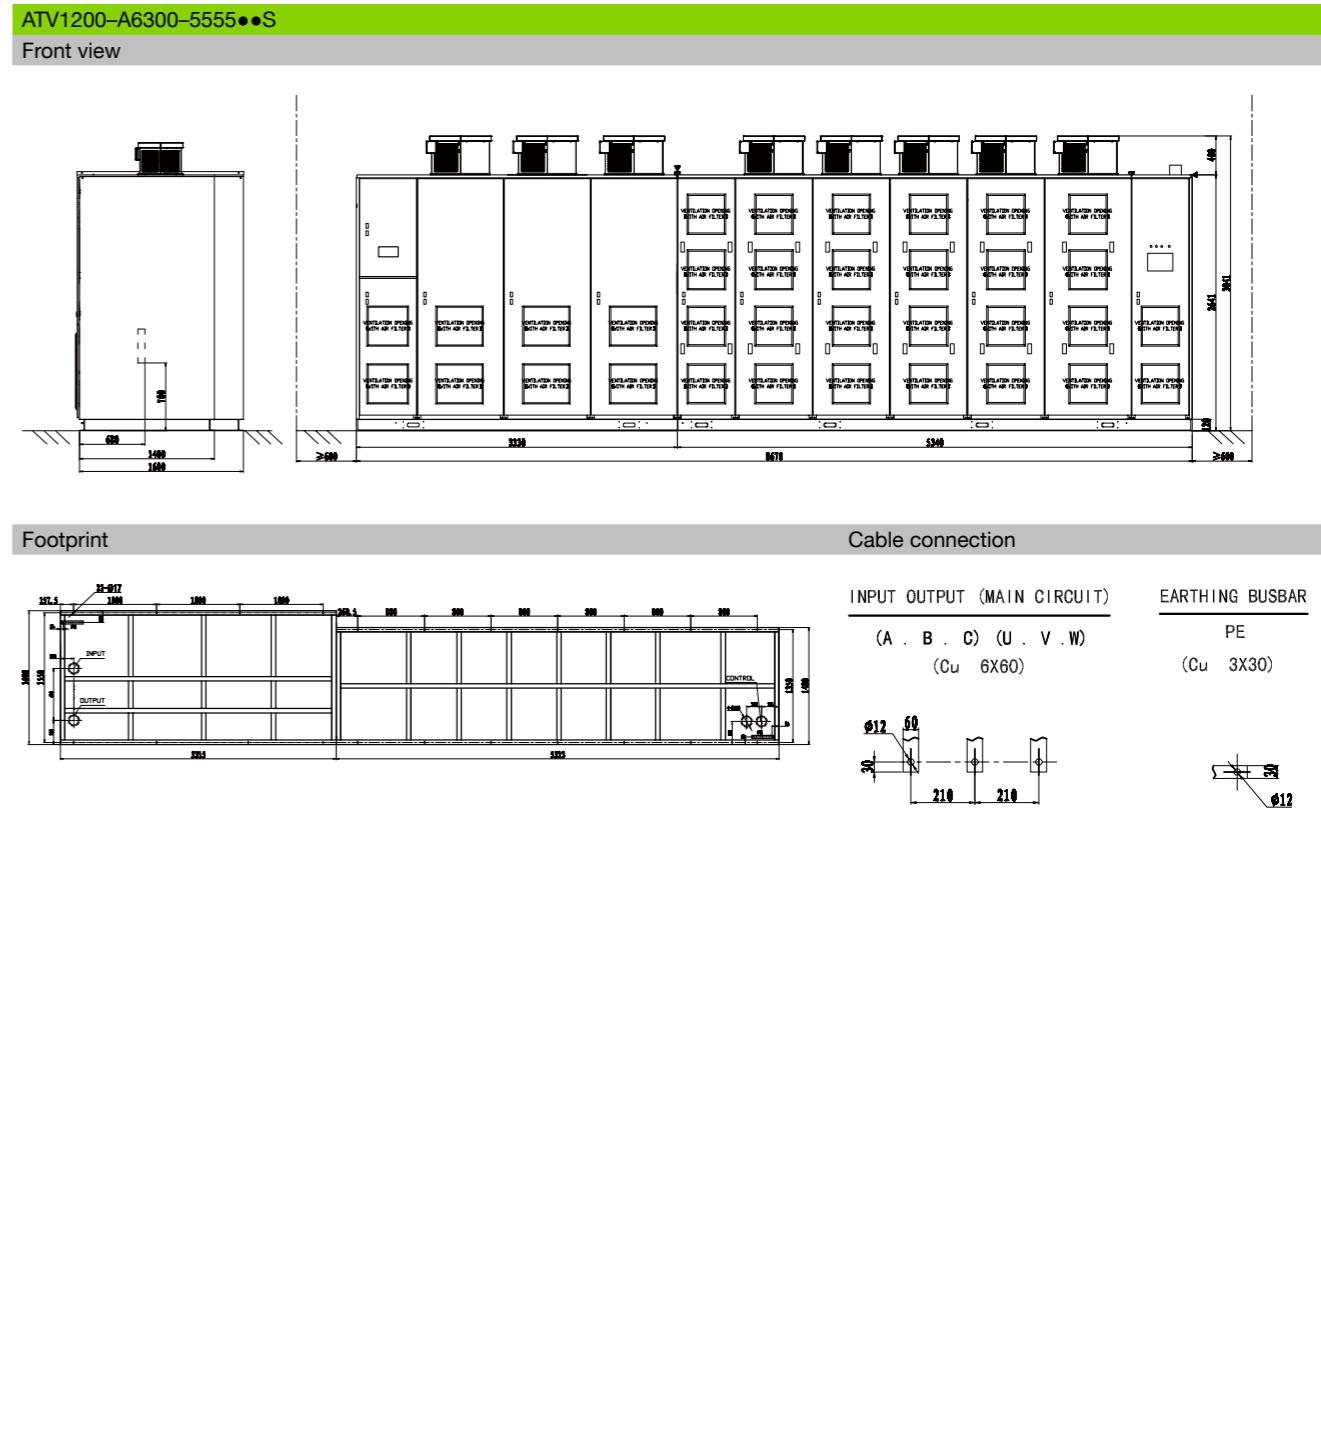

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV


| Technical data for output voltage 5.5 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A6900-5555••• | A7450-5555••• | A8100-5555••• |
| Nominal data | | | |
| Type rating [kVA] | 6900 | 7450 | 8100 |
| Motor power [kW] | 5768 | 6228 | 6772 |
| Continuous output current [A] | | | |
| With 120 % overload | 720 | 780 | 850 |
| With 150 % overload | 576 | 624 | 680 |
| Max. output current [A] | | | |
| 1 min/10 min | 864 | 936 | 1020 |
| Power cells | | | |
| Number of cells per phase | 5 | 5 | 5 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| High efficiency | | | |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 202 (incl. fan power) | ≤ 206 (incl. fan power) | ≤ 217 (incl. fan power) |
| High efficiency | | | |
| Air flow [m³/h] | | | |
| Standard efficiency | 90000 | 90000 | 90000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 18400 | 19900 | 20300 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 8970x1700x3040 | 8970x1700x3040 | 8970x1700x3040 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 5.5 kV

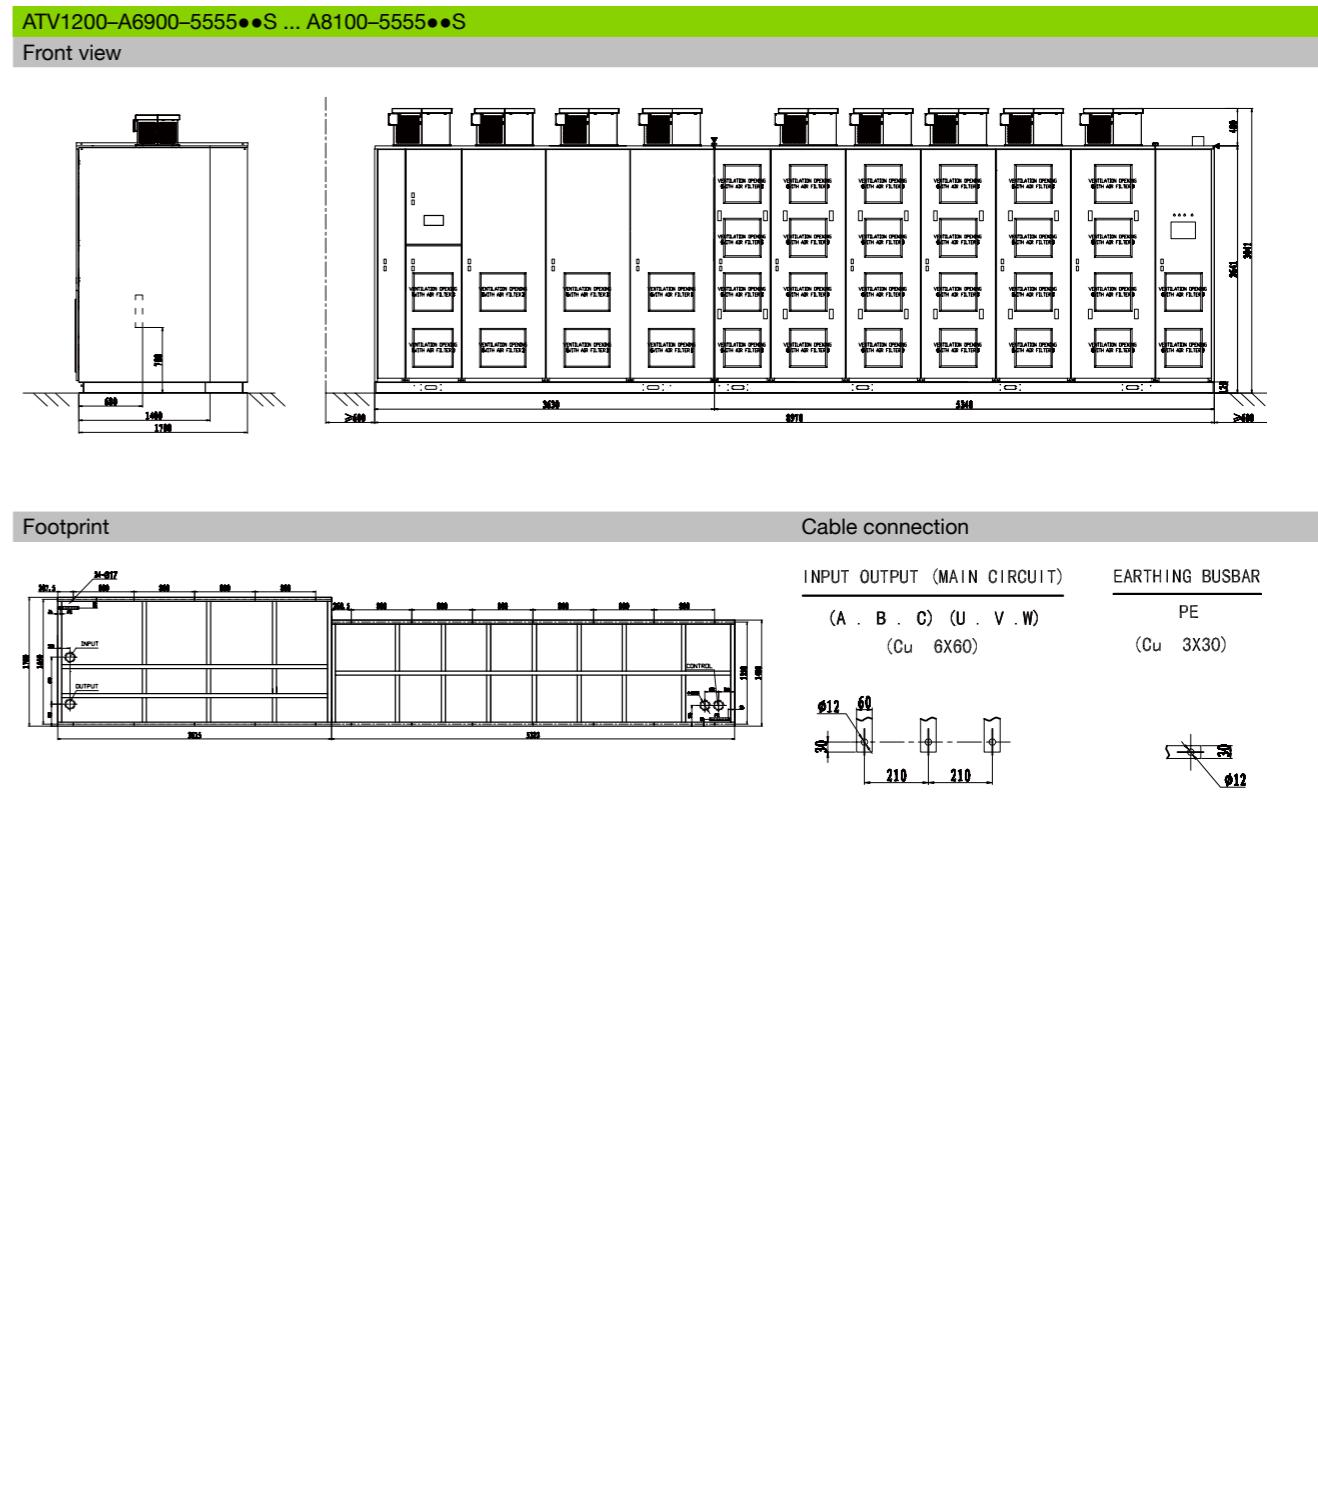

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

| Technical data for output voltage 6.0 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A470-6060••• | A570-6060••• | A670-6060••• |
| Nominal data | | | |
| Type rating [kVA] | 470 | 570 | 670 |
| Motor power [kW] | 393 | 477 | 560 |
| Continuous output current [A] | | | |
| With 120 % overload | 45 | 55 | 65 |
| With 150 % overload | 36 | 44 | 52 |
| Max. output current [A] | | | |
| 1 min/10 min | 54 | 66 | 78 |
| Power cells | | | |
| Number of cells per phase | 5 | 5 | 5 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 16 (incl. fan power) | ≤ 19 (incl. fan power) | ≤ 22 (incl. fan power) |
| High efficiency | ≤ 14 (incl. fan power) | ≤ 17 (incl. fan power) | ≤ 20 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 16600 | 16600 | 16600 |
| High efficiency | 19900 | 19900 | 19900 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 2900 | 2900 | 3300 |
| High efficiency | 3800 | 4100 | 4200 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 2860x1400x2590 | 2860x1400x2590 | 2860x1400x2590 |
| High efficiency | 3160x1500x2740 | 3160x1500x2740 | 3160x1500x2740 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

| Technical data for output voltage 6.0 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A790-6060••• | A940-6060••• |
| Nominal data | | |
| Type rating [kVA] | 790 | 940 |
| Motor power [kW] | 660 | 786 |
| Continuous output current [A] | | |
| With 120 % overload | 76 | 90 |
| With 150 % overload | 61 | 72 |
| Max. output current [A] | | |
| 1 min/10 min | 91 | 108 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 26 (incl. fan power) | ≤ 31 (incl. fan power) |
| High efficiency | ≤ 23 (incl. fan power) | ≤ 28 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16600 | 16600 |
| High efficiency | 23200 | 23200 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 3300 | 3600 |
| High efficiency | 4400 | 4600 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 2860x1400x2590 | 2860x1400x2590 |
| High efficiency | 3460x1500x2740 | 3460x1500x2740 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A1040-6060••• |
| Nominal data | |
| Type rating [kVA] | 1040 |
| Motor power [kW] | 869 |
| Continuous output current [A] | |
| With 120 % overload | 100 |
| With 150 % overload | 80 |
| Max. output current [A] | |
| 1 min/10 min | 120 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 35 (incl. fan power) |
| High efficiency | ≤ 30 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 19900 |
| High efficiency | 23200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 3800 |
| High efficiency | 4800 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3160x1400x2590 |
| High efficiency | 3460x1600x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

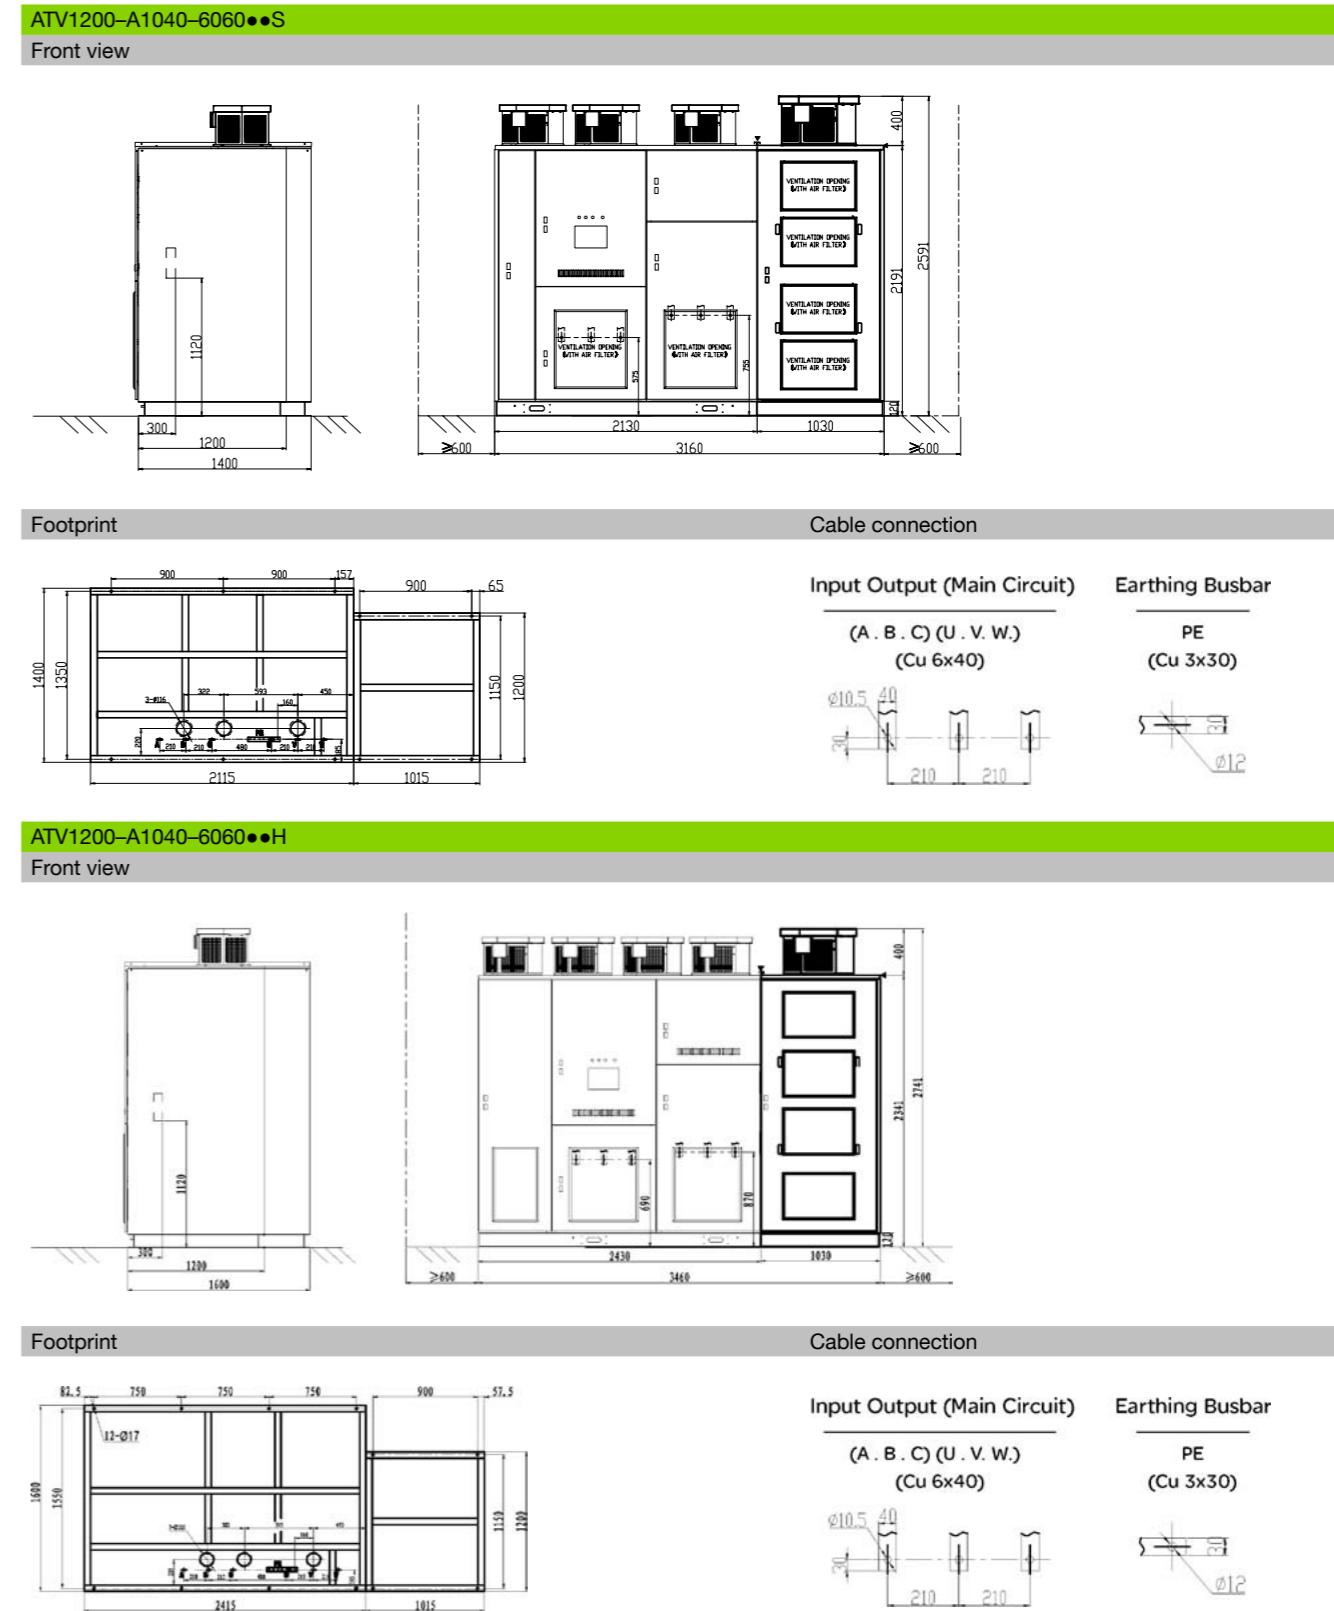

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

ATV1200 A1190-6060•••

Nominal data

Type rating [kVA]

1190

Motor power [kW]

995

Continuous output current [A]

With 120 % overload

114

With 150 % overload

91

Max. output current [A]

1 min/10 min

137

Power cells

Number of cells per phase

5

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 40
(incl. fan power)

High efficiency

≤ 35
(incl. fan power)

Air flow [m³/h]

Standard efficiency

16500

High efficiency

19800

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

4100

High efficiency

5000

Dimension[mm] W*D*H

Standard efficiency

3660x1400x2520

High efficiency

3960x1600x2670

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A1190-6060••S


Front view

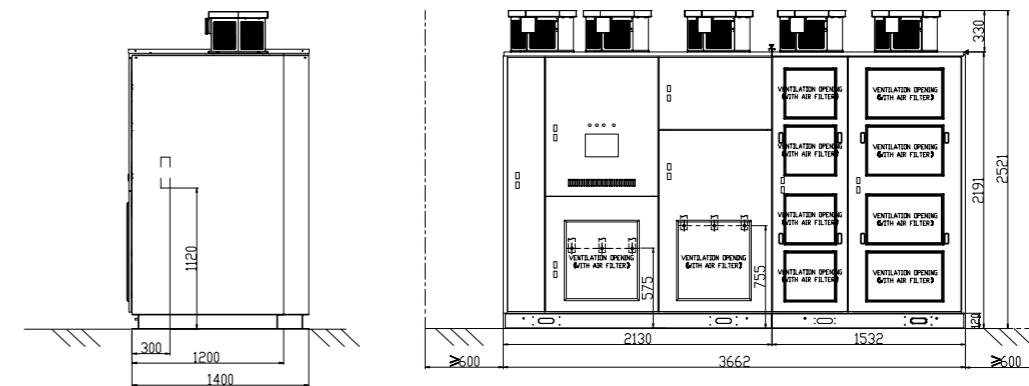

Footprint

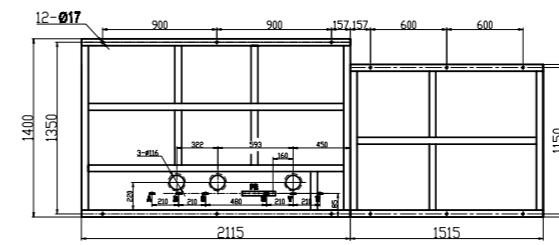

Cable connection

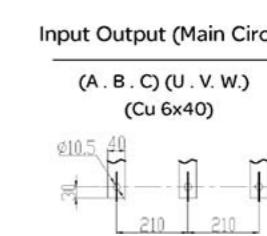

Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)


Earthing Busbar

PE
(Cu 3x30)




ATV1200-A1190-6060••H


Front view

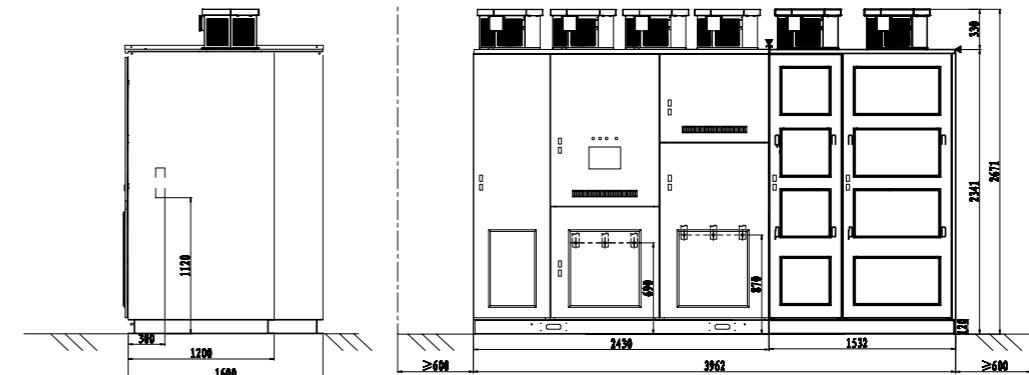

Footprint

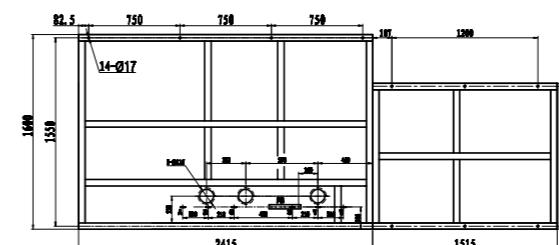

Cable connection

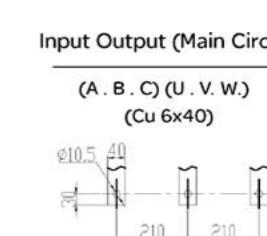

Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)

Earthing Busbar

PE
(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A1400-6060••• |
| Nominal data | |
| Type rating [kVA] | 1400 |
| Motor power [kW] | 1170 |
| Continuous output current [A] | |
| With 120 % overload | 135 |
| With 150 % overload | 108 |
| Max. output current [A] | |
| 1 min/10 min | 162 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 47 (incl. fan power) |
| High efficiency | ≤ 41 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 16500 |
| High efficiency | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5100 |
| High efficiency | 5800 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3660x1500x2670 |
| High efficiency | 3960x1600x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

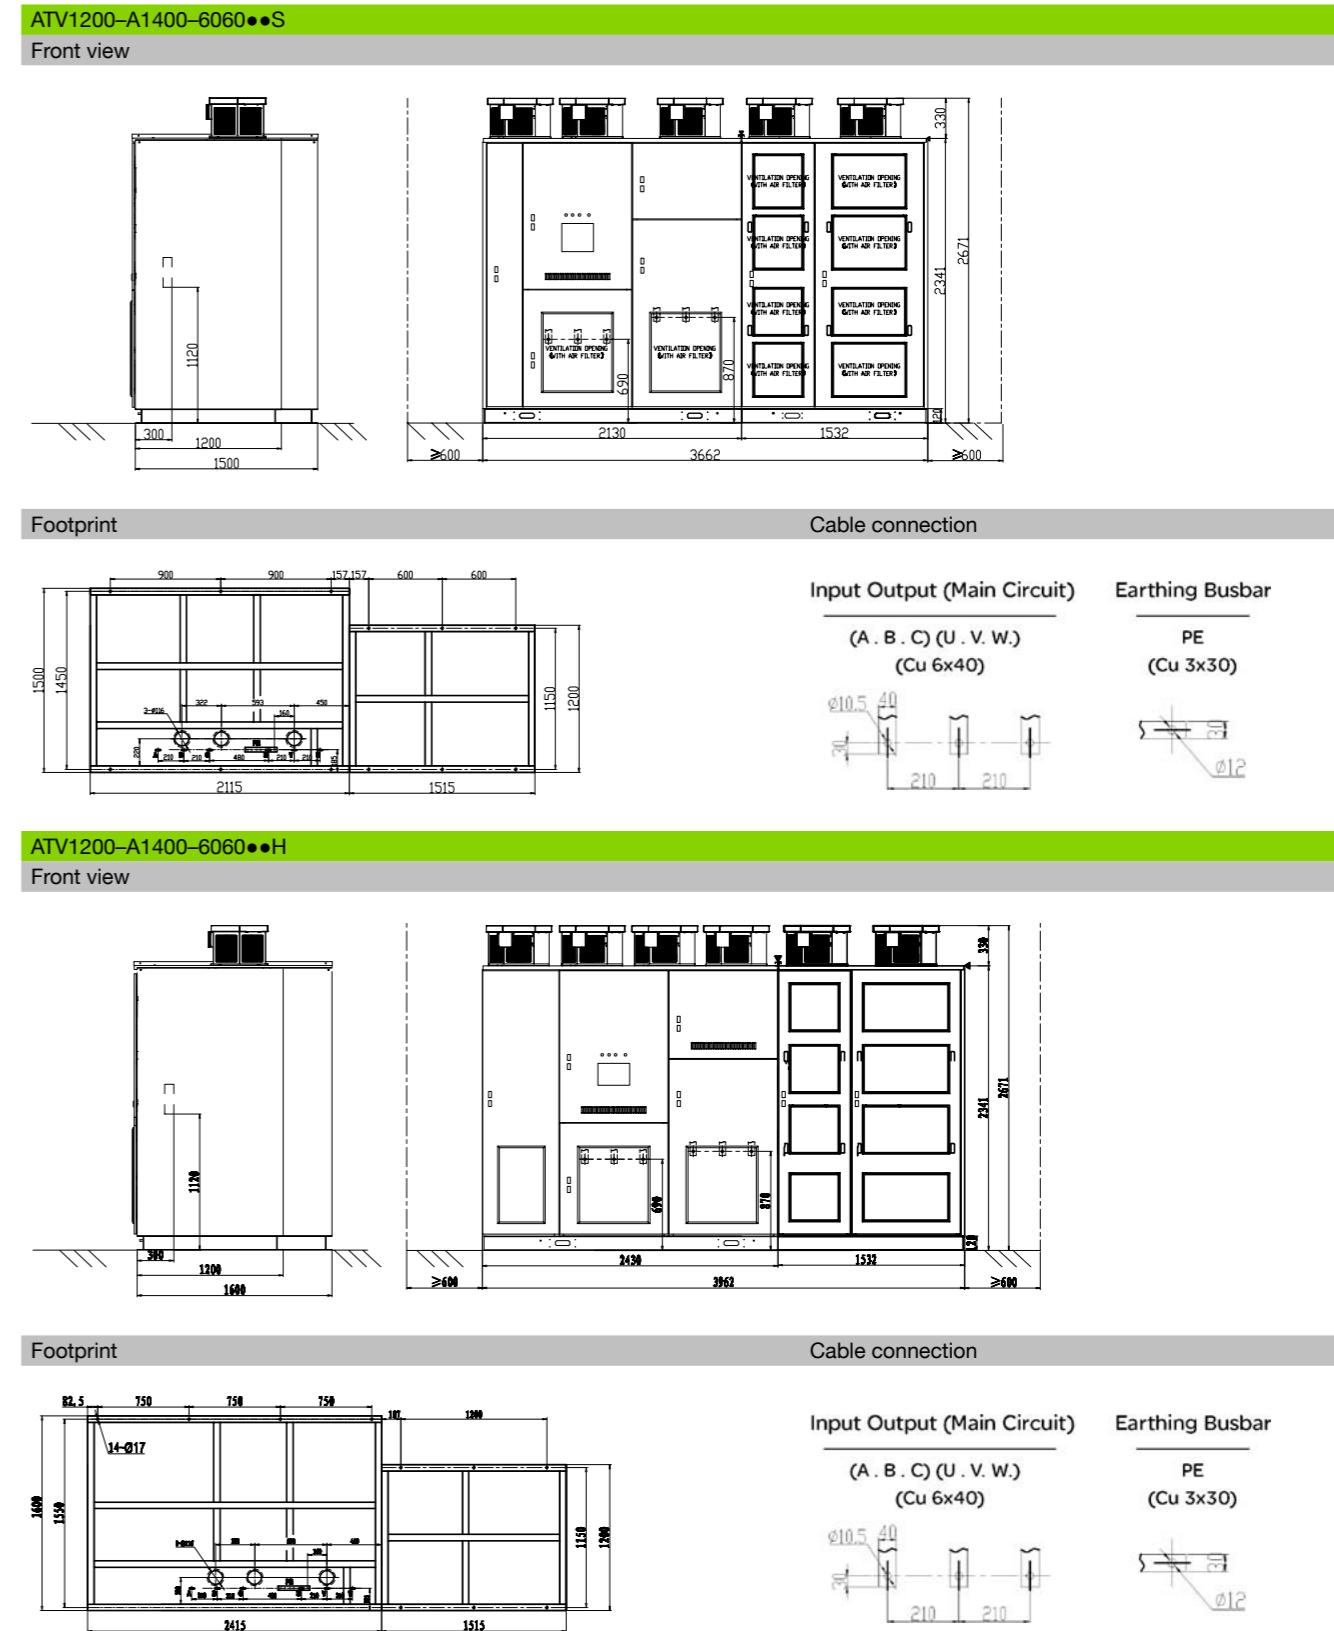

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A1560-6060••• |
| Nominal data | |
| Type rating [kVA] | 1560 |
| Motor power [kW] | 1304 |
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 52 (incl. fan power) |
| High efficiency | ≤ 46 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5300 |
| High efficiency | 6000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3660x1500x2820 |
| High efficiency | 3960x1600x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

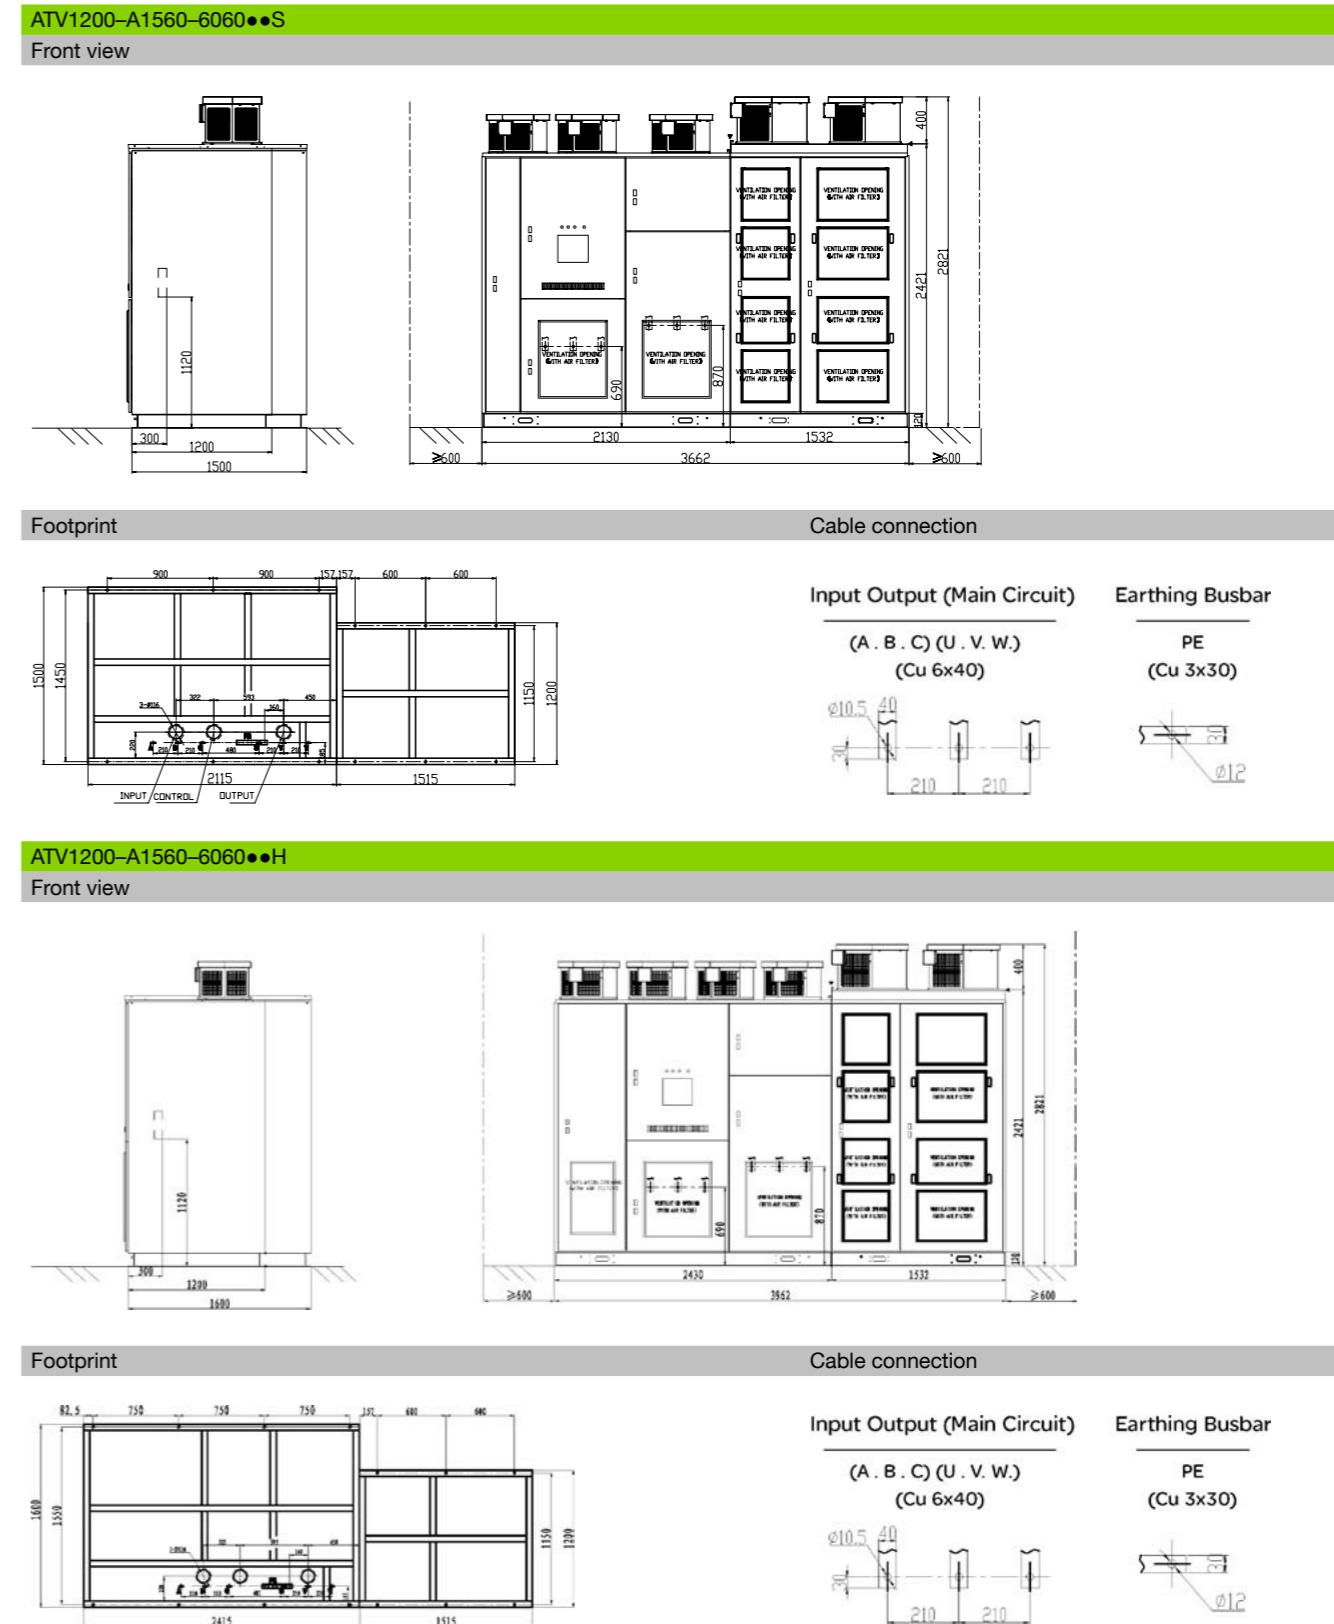

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

ATV1200 | A1750-6060•••

Nominal data

Type rating [kVA]

1750

Motor power [kW]

1463

Continuous output current [A]

With 120 % overload

168

With 150 % overload

135

Max. output current [A]

1 min/10 min

202

Power cells

Number of cells per phase

5

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 59
(incl. fan power)

High efficiency

≤ 51
(incl. fan power)

Air flow [m³/h]

Standard efficiency

High efficiency

19800

23100

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

5500

High efficiency

6600

Dimension[mm] W*D*H

Standard efficiency

4360x1500x2670

High efficiency

4660x1600x2670

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A1750-6060••S



Front view

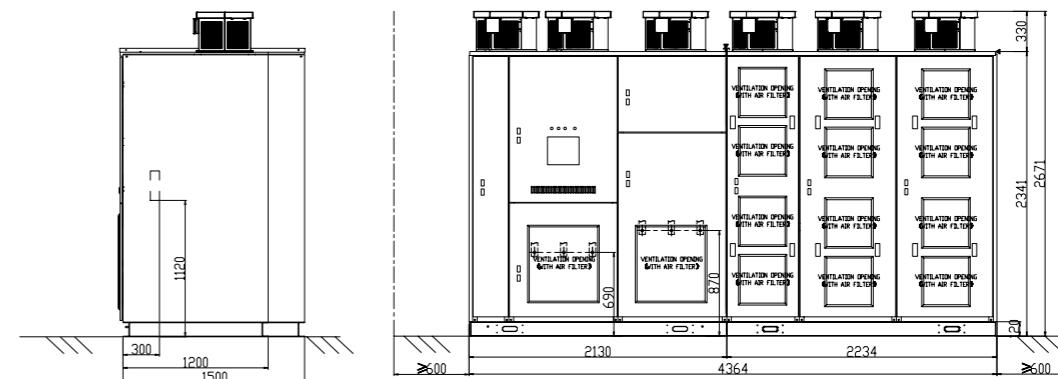

Footprint

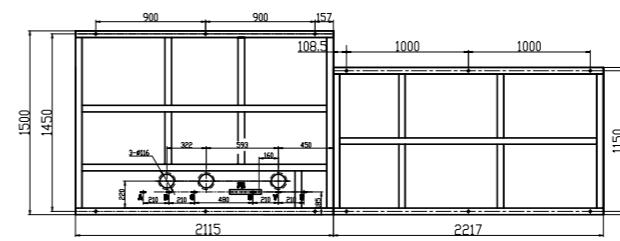


Cable connection

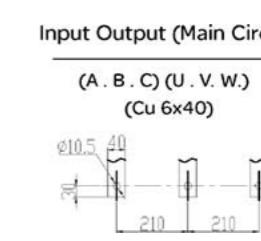


ATV1200-A1750-6060••H



Front view

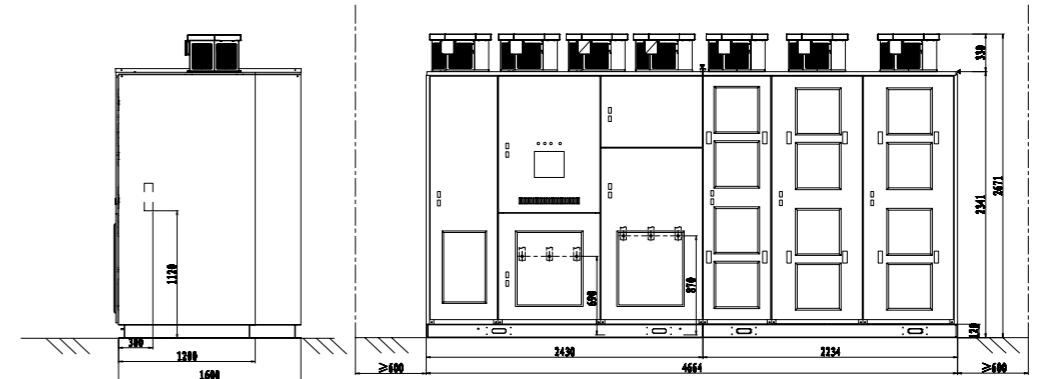

Footprint

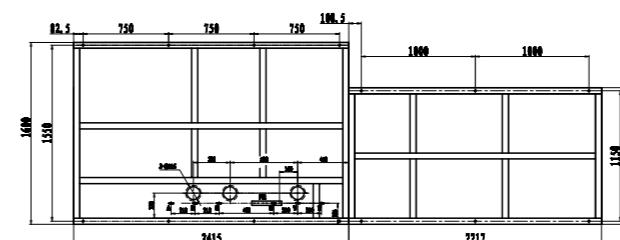

Cable connection

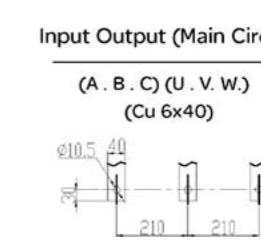

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A2080-6060••• |
| Nominal data | |
| Type rating [kVA] | 2080 |
| Motor power [kW] | 1739 |
| Continuous output current [A] | |
| With 120 % overload | 200 |
| With 150 % overload | 160 |
| Max. output current [A] | |
| 1 min/10 min | 240 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 70 (incl. fan power) |
| High efficiency | ≤ 61 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 23100 |
| High efficiency | 23100 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 6600 |
| High efficiency | 7500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4660x1500x2670 |
| High efficiency | 4960x1700x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

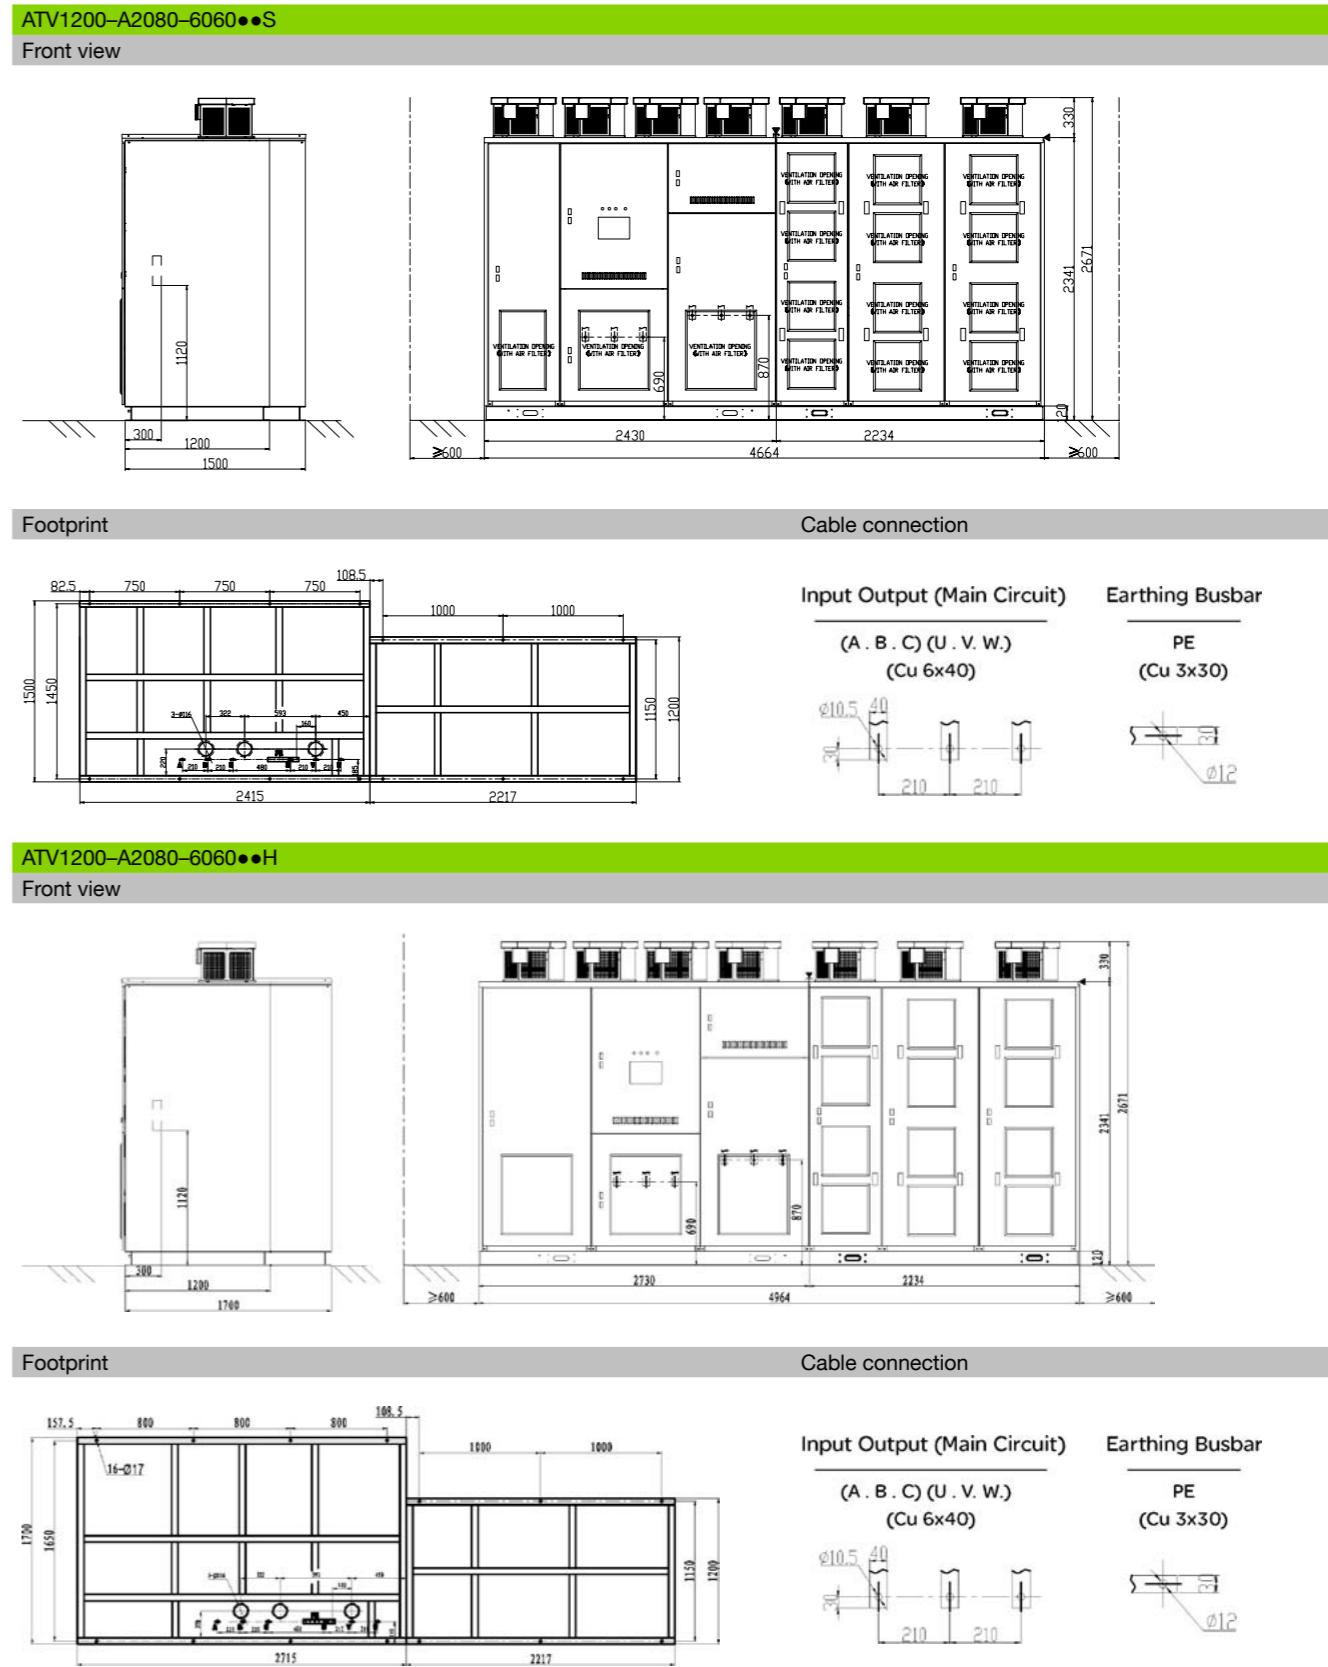

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2290-6060••• | A2500-6060••• |
| Nominal data | | |
| Type rating [kVA] | 2290 | 2500 |
| Motor power [kW] | 1914 | 2090 |
| Continuous output current [A] | | |
| With 120 % overload | 220 | 241 |
| With 150 % overload | 176 | 192 |
| Max. output current [A] | | |
| 1 min/10 min | 264 | 289 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 77 (incl. fan power) | ≤ 84 (incl. fan power) |
| High efficiency | ≤ 67 (incl. fan power) | ≤ 73 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 23100 | 23100 |
| High efficiency | 23100 | 23100 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 6900 | 7200 |
| High efficiency | 7900 | 8400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 4660x1600x2670 | 4660x1600x2670 |
| High efficiency | 4960x1700x2670 | 4960x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A2290-6060••S ... A2500-6060••S


Front view

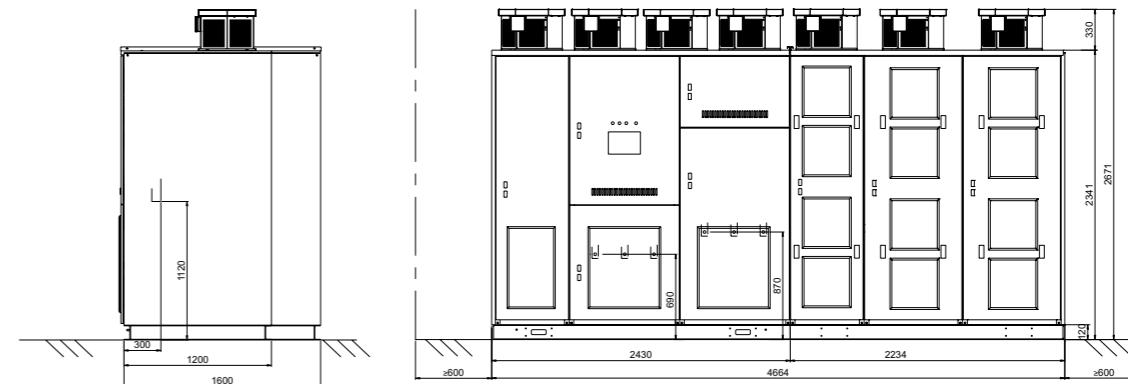

Footprint

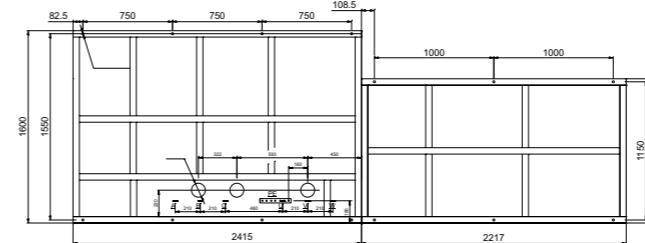


Cable connection

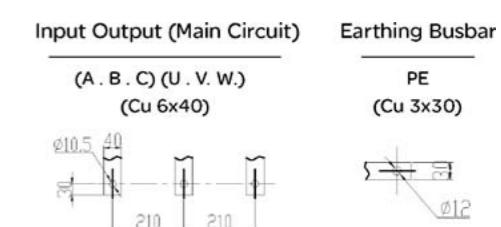


ATV1200-A2290-6060••H ... A2500-6060••H


Front view

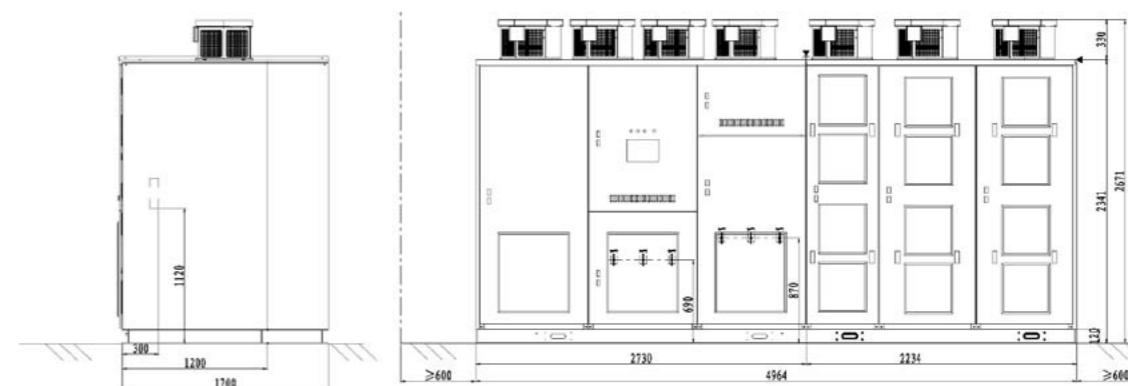

Footprint

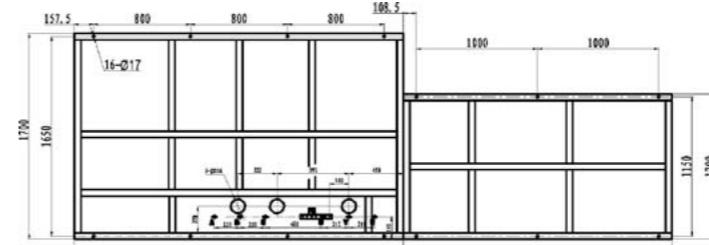

Cable connection

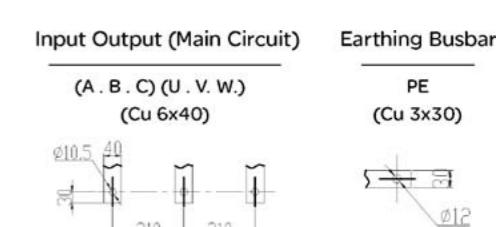

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A2910-6060••• |
| Nominal data | |
| Type rating [kVA] | 2910 |
| Motor power [kW] | 2433 |
| Continuous output current [A] | |
| With 120 % overload | 280 |
| With 150 % overload | 224 |
| Max. output current [A] | |
| 1 min/10 min | 336 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 97 (incl. fan power) |
| High efficiency | ≤ 85 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 43200 |
| High efficiency | 43200 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 7800 |
| High efficiency | 9000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 4660x1600x2820 |
| High efficiency | 4960x1700x2820 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

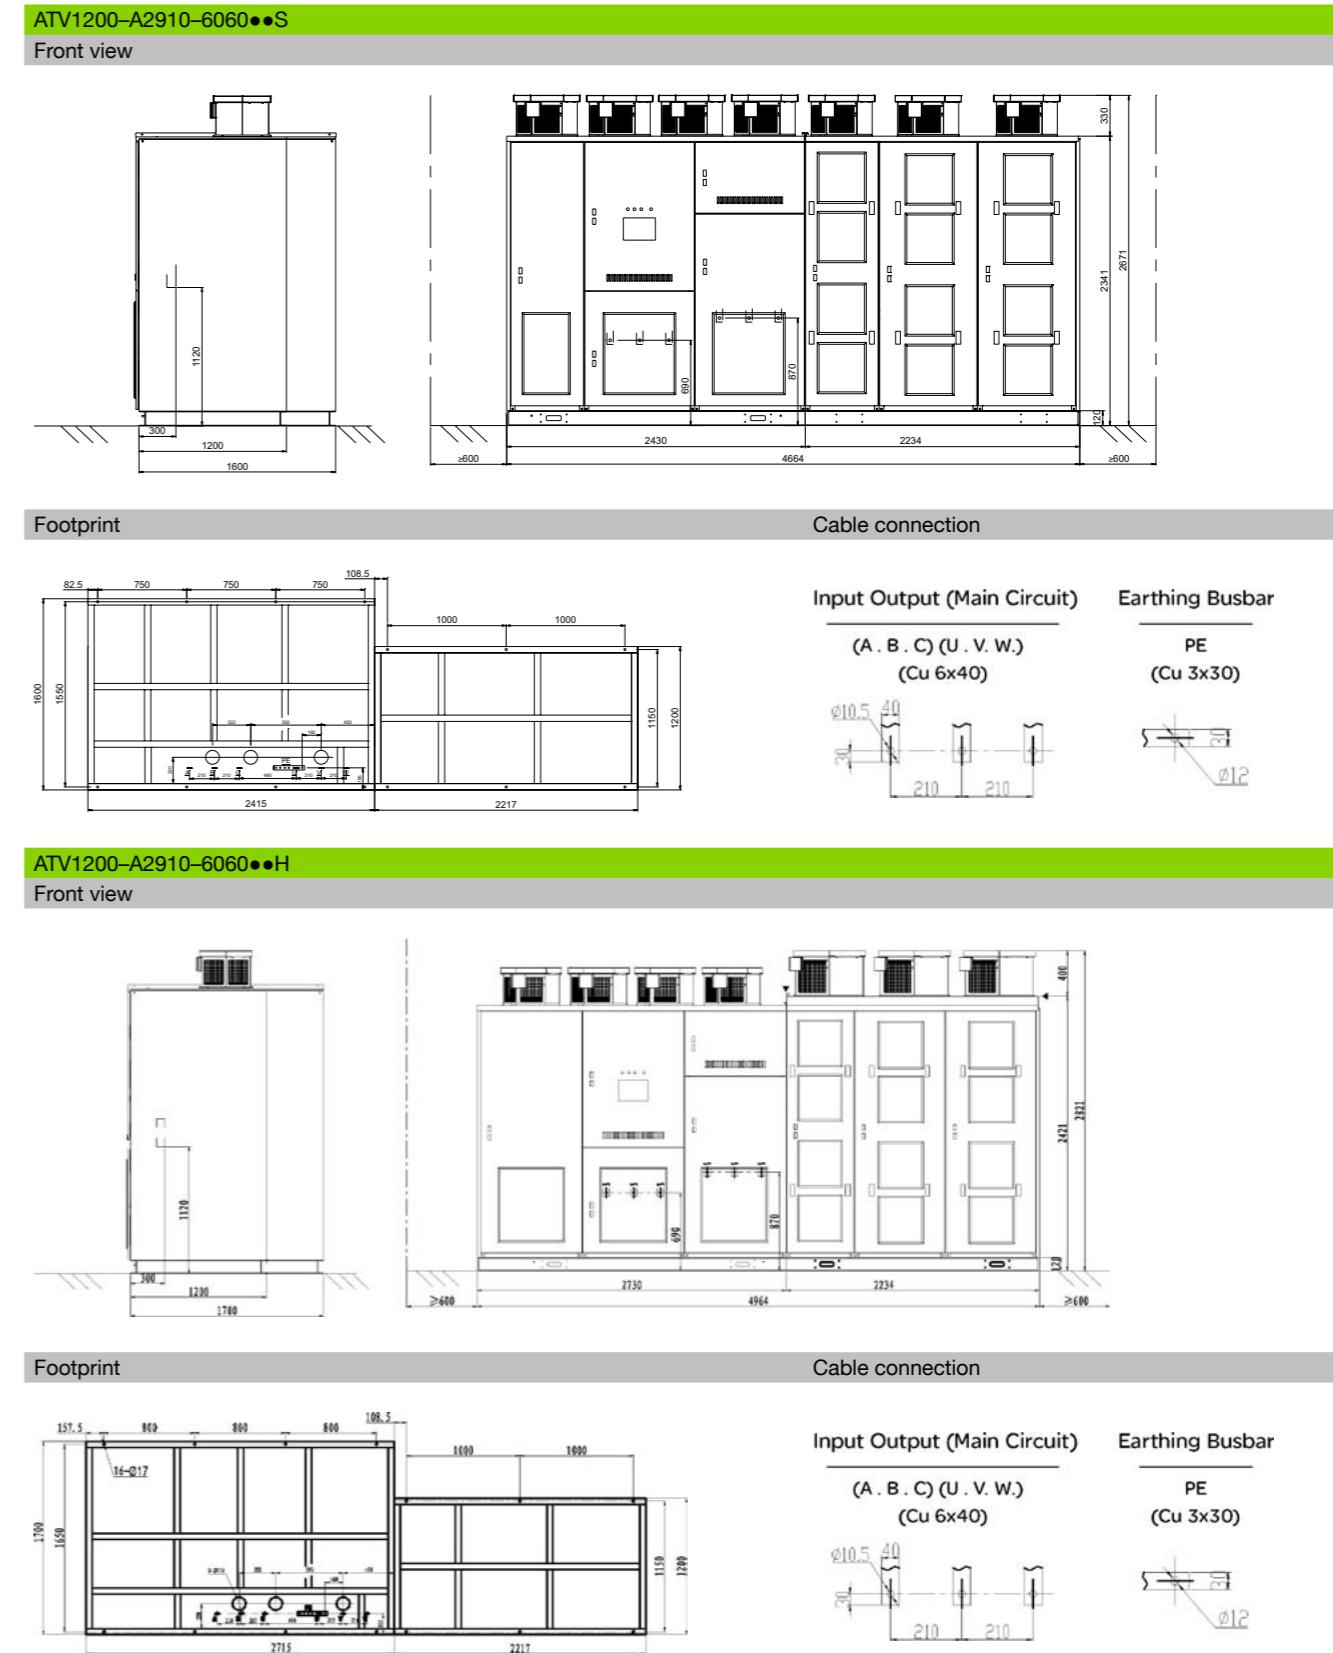

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A3130-6060••• | A3325-6060••• |
| Nominal data | | |
| Type rating [kVA] | 3130 | 3325 |
| Motor power [kW] | 2617 | 2780 |
| Continuous output current [A] | | |
| With 120 % overload | 301 | 320 |
| With 150 % overload | 241 | 256 |
| Max. output current [A] | | |
| 1 min/10 min | 361 | 384 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 105 (incl. fan power) | ≤ 111 (incl. fan power) |
| High efficiency | ≤ 92 (incl. fan power) | ≤ 97 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 29700 | 29700 |
| High efficiency | 29700 | 29700 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 8100 | 10000 |
| High efficiency | 9200 | 10800 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5770x1600x2670 | 5770x1600x2670 |
| High efficiency | 6070x1700x2670 | 6070x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A3130-6060••S ... A3325-6060••S


Front view

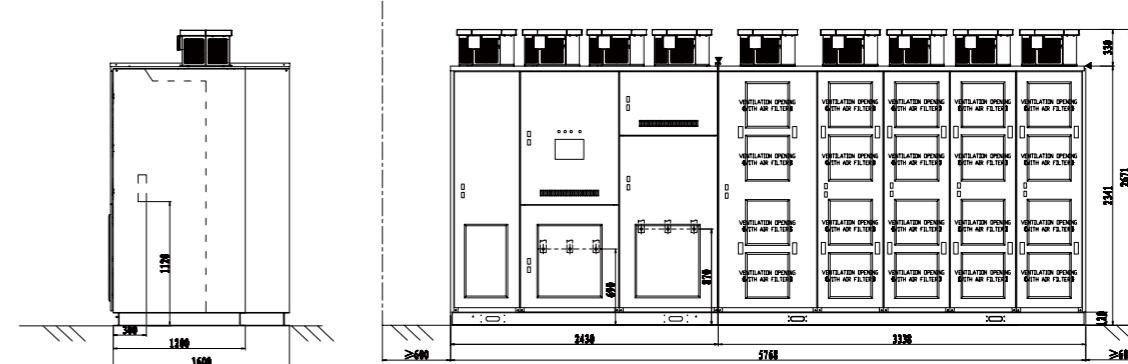

Footprint

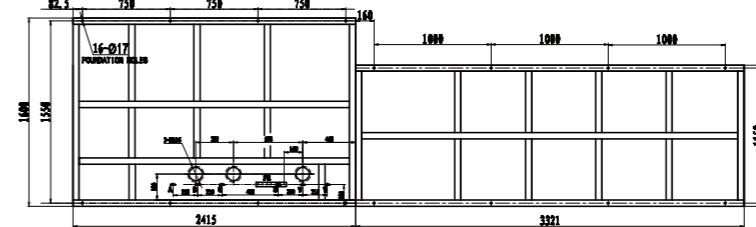


Cable connection

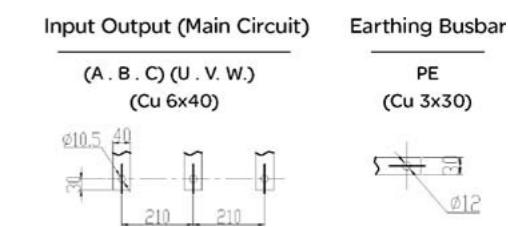


ATV1200-A3130-6060••H ... A3325-6060••H


Front view

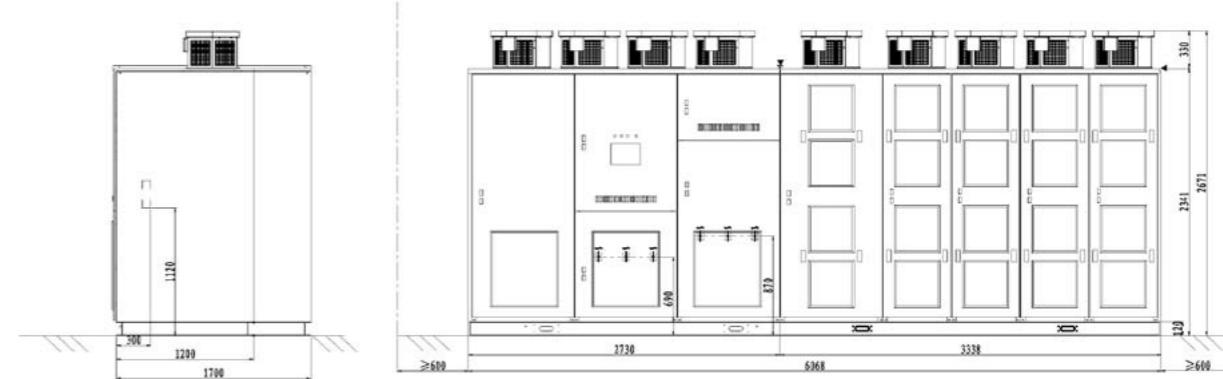

Footprint

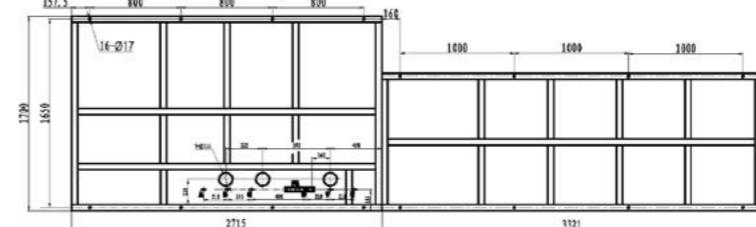

Cable connection

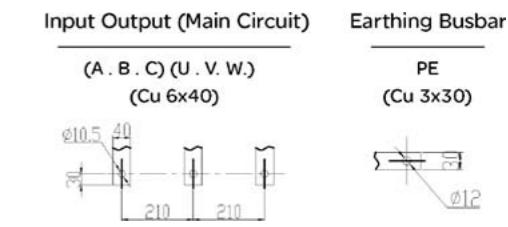

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A3500-6060••• |
| Nominal data | |
| Type rating [kVA] | 3500 |
| Motor power [kW] | 2926 |
| Continuous output current [A] | |
| With 120 % overload | 337 |
| With 150 % overload | 269 |
| Max. output current [A] | |
| 1 min/10 min | 404 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 117 (incl. fan power) |
| High efficiency | ≤ 102 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29700 |
| High efficiency | 29700 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 10300 |
| High efficiency | 11000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6070x1700x2670 |
| High efficiency | 6070x1700x2670 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

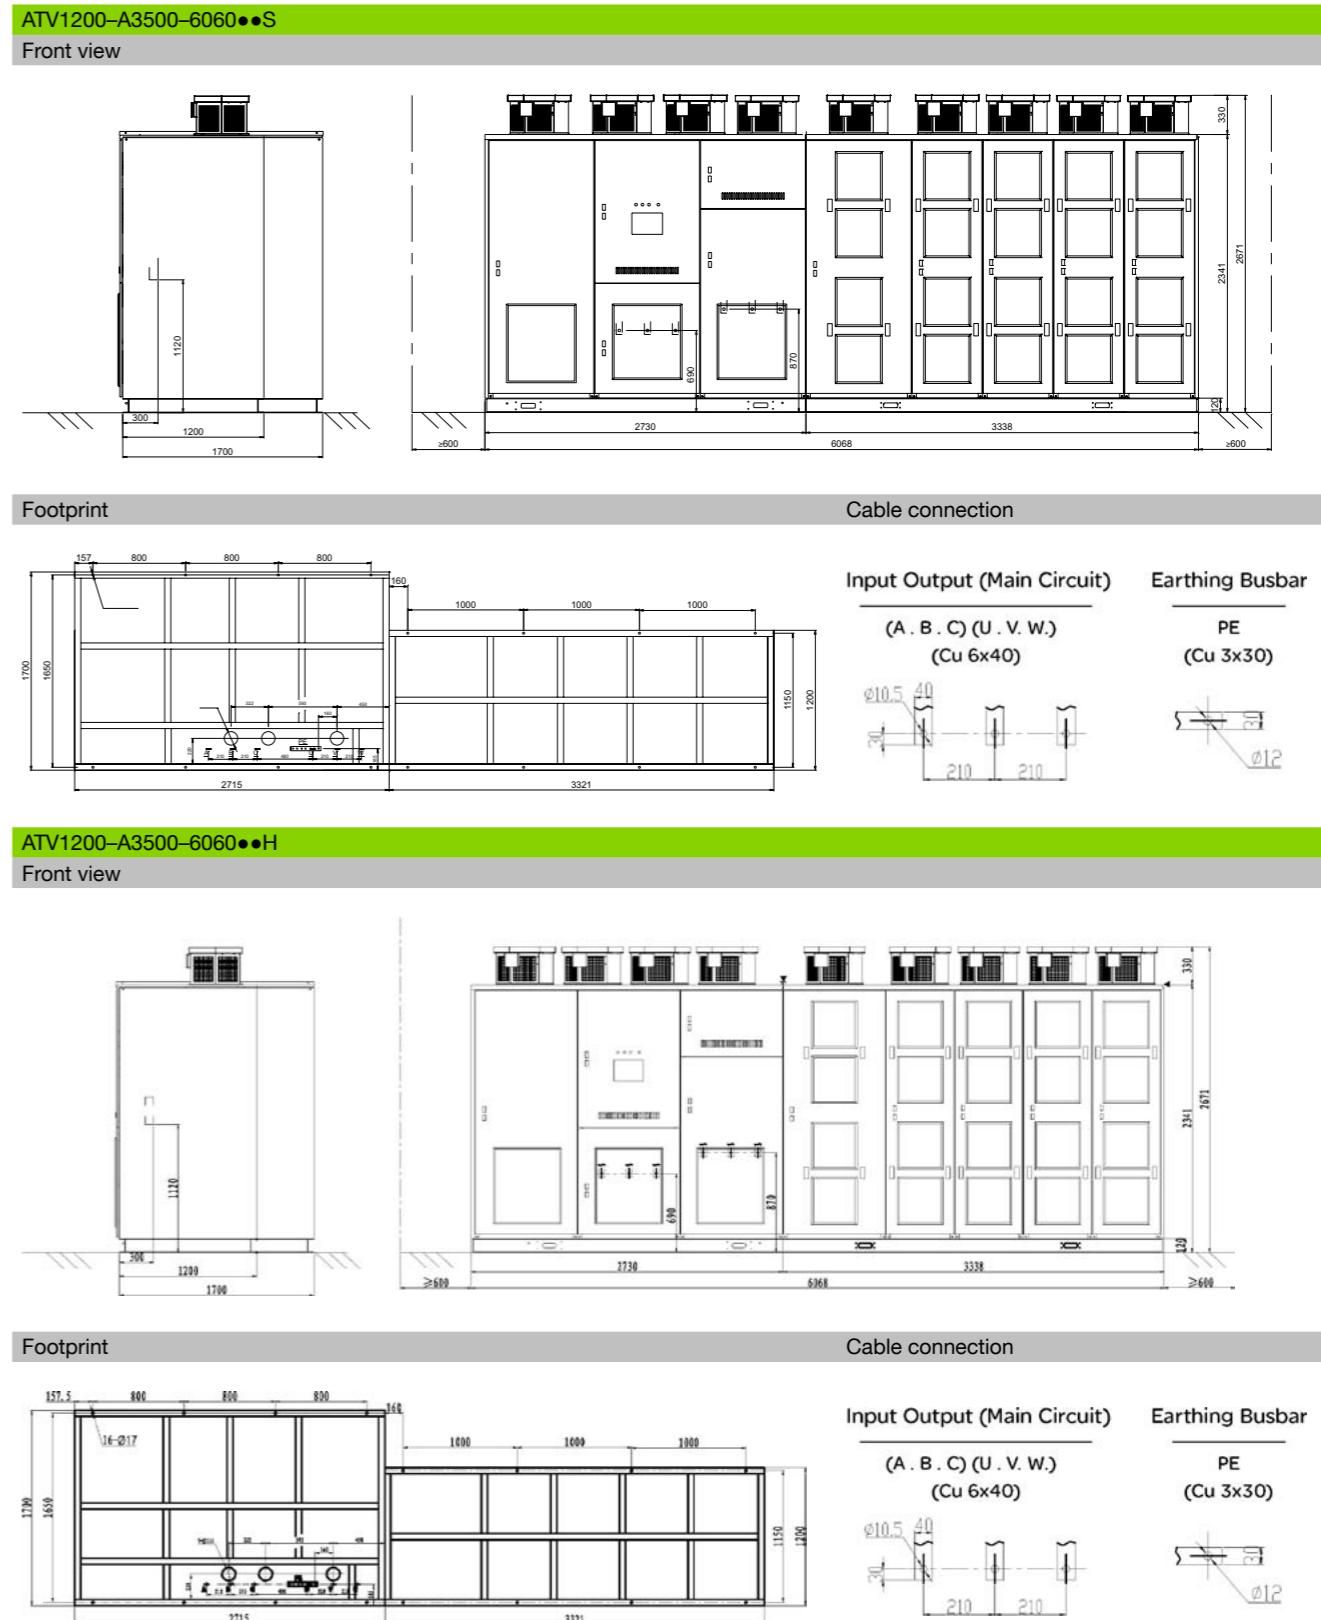

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A3940-6060••• |
| Nominal data | |
| Type rating [kVA] | 3940 |
| Motor power [kW] | 3294 |
| Continuous output current [A] | |
| With 120 % overload | 379 |
| With 150 % overload | 303 |
| Max. output current [A] | |
| 1 min/10 min | 455 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 132 (incl. fan power) |
| High efficiency | ≤ 115 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29700 |
| High efficiency | 29700 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 10900 |
| High efficiency | 11600 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6070x1700x2670 |
| High efficiency | 6070x1700x2970 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A4260-6060••• | A4470-6060••• |
| Nominal data | | |
| Type rating [kVA] | 4260 | 4470 |
| Motor power [kW] | 3561 | 3737 |
| Continuous output current [A] | | |
| With 120 % overload | 410 | 430 |
| With 150 % overload | 328 | 344 |
| Max. output current [A] | | |
| 1 min/10 min | 492 | 516 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96.1 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 142 (incl. fan power) | ≤ 146 (incl. fan power) |
| High efficiency | ≤ 125 (incl. fan power) | ≤ 131 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 46500 | 46500 |
| High efficiency | 46500 | 46500 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 11100 | 11300 |
| High efficiency | 12200 | 12400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6070x1700x2740 | 6070x1700x2740 |
| High efficiency | 6370x1800x3040 | 6370x1800x3040 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A4260-6060••S ... A4470-6060••S


Front view

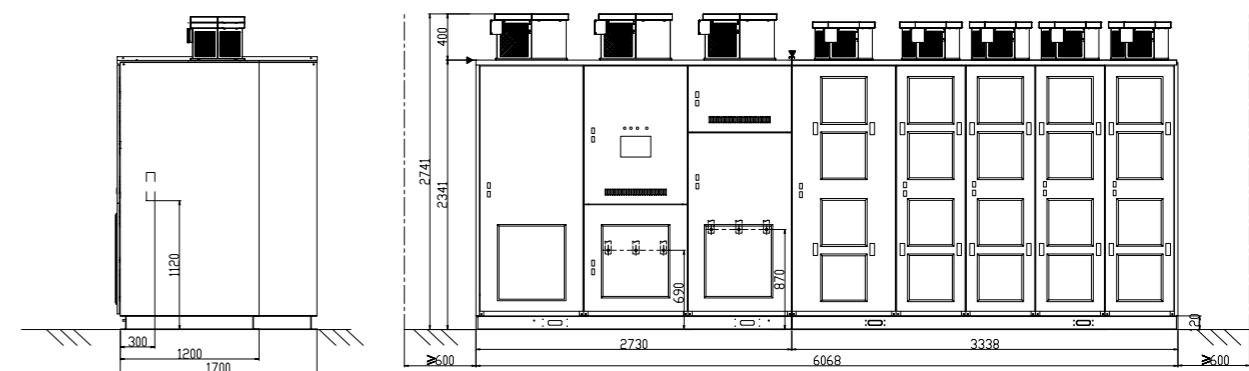

Footprint

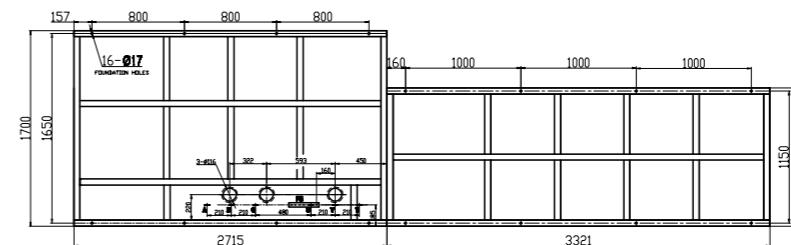


Cable connection

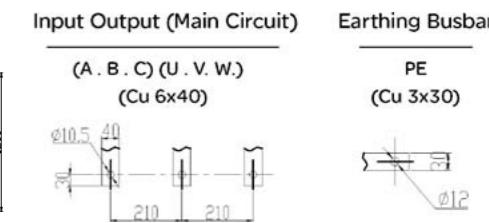


ATV1200-A4260-6060••H ... A4470-6060••H


Front view

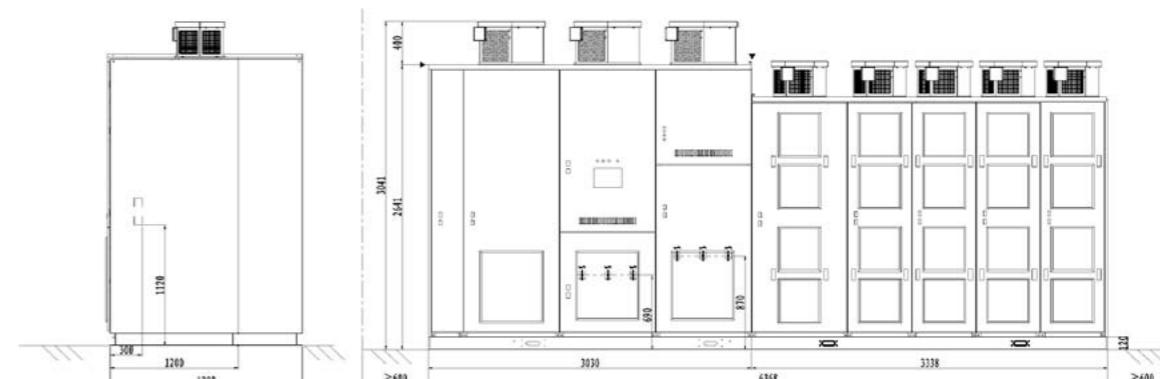

Footprint

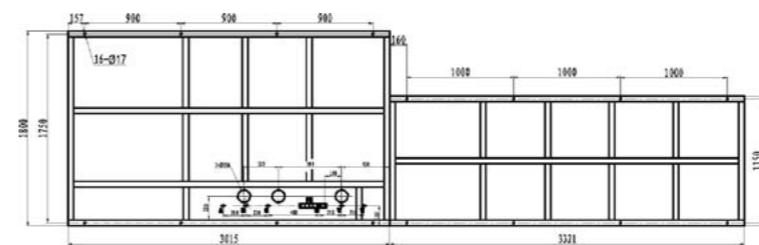

Cable connection

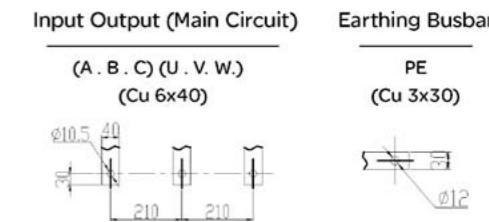

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

Technical data for output voltage 6.0 kV

| | |
|---------|---------------|
| ATV1200 | A5100-6060••• |
|---------|---------------|

Nominal data

| | |
|-------------------|------|
| Type rating [kVA] | 5100 |
|-------------------|------|

| | |
|------------------|------|
| Motor power [kW] | 4264 |
|------------------|------|

| | |
|-------------------------------|--|
| Continuous output current [A] | |
|-------------------------------|--|

| | |
|---------------------|-----|
| With 120 % overload | 490 |
| With 150 % overload | 392 |

| | |
|-------------------------|-----|
| Max. output current [A] | |
| 1 min/10 min | 588 |

| | |
|-------------|--|
| Power cells | |
|-------------|--|

| | |
|---------------------------|---|
| Number of cells per phase | 5 |
|---------------------------|---|

| | |
|-----------------|--|
| Characteristics | |
|-----------------|--|

| | |
|------------------------------------|--|
| Efficiency (incl. transformer) [%] | |
|------------------------------------|--|

| | |
|---------------------|-----------------------------|
| Standard efficiency | ≥ 96.2 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |

| | |
|--------------------------------|--|
| Total losses at 100% load [kW] | |
|--------------------------------|--|

| | |
|---------------------|----------------------------|
| Standard efficiency | ≤ 162 (incl. fan power) |
| High efficiency | ≤ 149 (incl. fan power) |

| | |
|-----------------|--|
| Air flow [m³/h] | |
|-----------------|--|

| | |
|---------------------|-------|
| Standard efficiency | 70000 |
| High efficiency | 70000 |

| | |
|------------------------------|------|
| Sound pressure level [dB(A)] | |
| | ≤ 80 |

| | |
|-------------|--|
| Weight [kg] | |
|-------------|--|

| | |
|---------------------|-------|
| Standard efficiency | 12500 |
| High efficiency | 13100 |

| | |
|---------------------|--|
| Dimension[mm] W*D*H | |
|---------------------|--|

| | |
|---------------------|----------------|
| Standard efficiency | 6070x1700x2820 |
| High efficiency | 6370x1800x3040 |

| | |
|------------|--|
| Connection | |
|------------|--|

| | |
|----------------|--|
| Incoming cable | |
|----------------|--|

| | |
|-----------|----------------------|
| Type | standard symmetrical |
| Max. size | see drawing |

| | |
|-------------|--|
| Motor cable | |
|-------------|--|

| | |
|-----------|-------------|
| Type | 3 core |
| Max. size | see drawing |

| | |
|------------------------------|--------|
| Max. length (without filter) | 2000 m |
|------------------------------|--------|

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.0 kV

ATV1200-A5100-6060••S

Front view

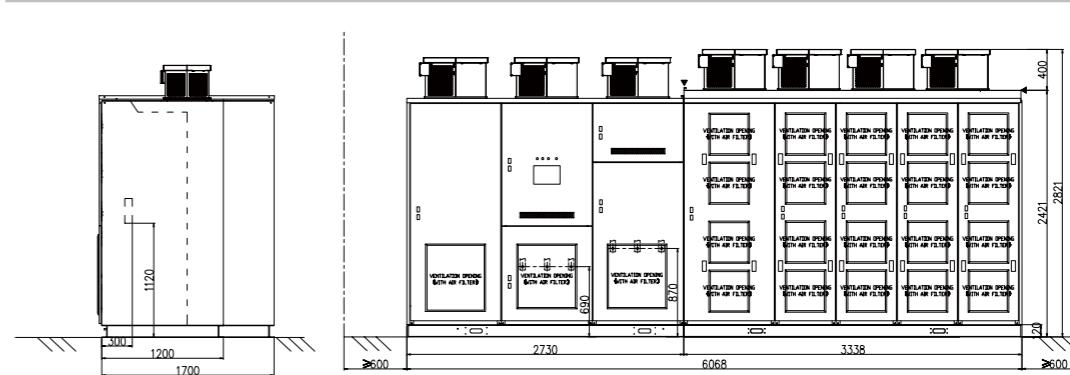


Footprint

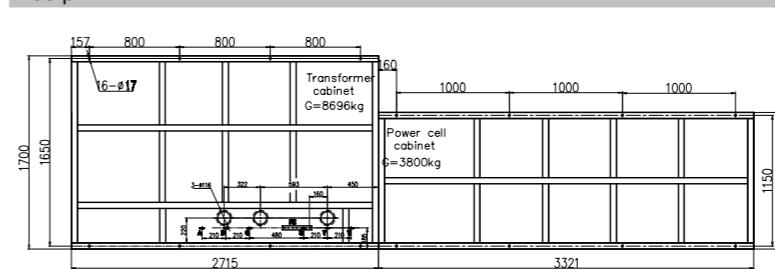


ATV1200-A5100-6060••H

Front view

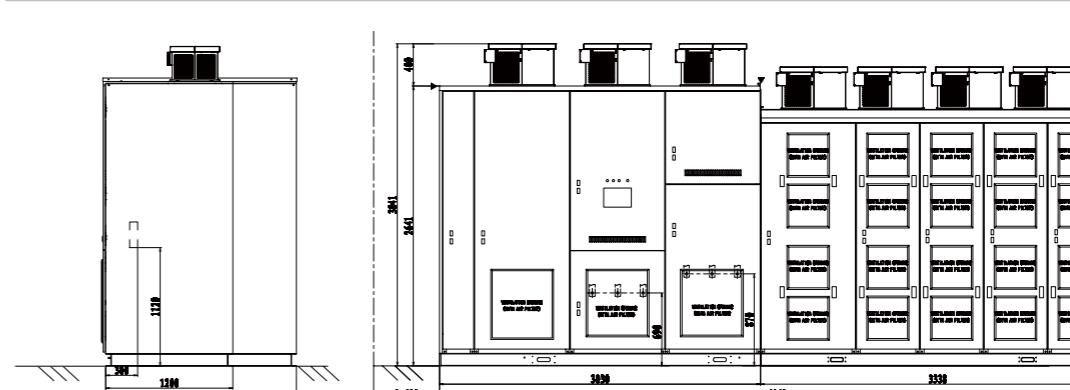


Footprint

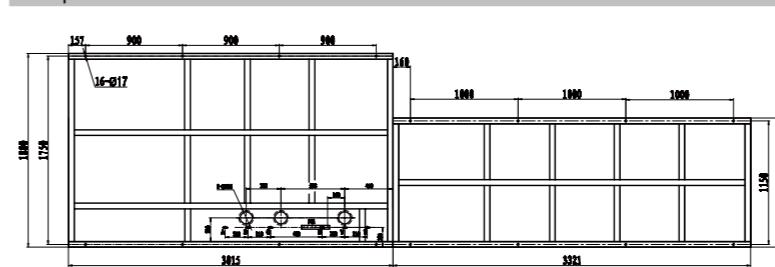

Input Output (Main Circuit)

(A . B . C) (U . V . W.)


(Cu 6x40)



Earthing Busbar

PE


(Cu 3x30)



Input Output (Main Circuit)

(A . B . C) (U . V . W.)


(Cu 6x40)



Earthing Busbar

PE

(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A5720-6060••• | A6350-6060••• |
| Nominal data | | |
| Type rating [kVA] | 5720 | 6350 |
| Motor power [kW] | 4782 | 5309 |
| Continuous output current [A] | | |
| With 120 % overload | 550 | 611 |
| With 150 % overload | 440 | 489 |
| Max. output current [A] | | |
| 1 min/10 min | 661 | 733 |
| Power cells | | |
| Number of cells per phase | 5 | 5 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.2 (incl. fan power) | ≥ 96.3 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 182 (incl. fan power) | ≤ 196 (incl. fan power) |
| High efficiency | ≤ 167 (incl. fan power) | ≤ 186 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 80000 | 80000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 15300 | 15600 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 7770x1800x3040 | 7770x1800x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

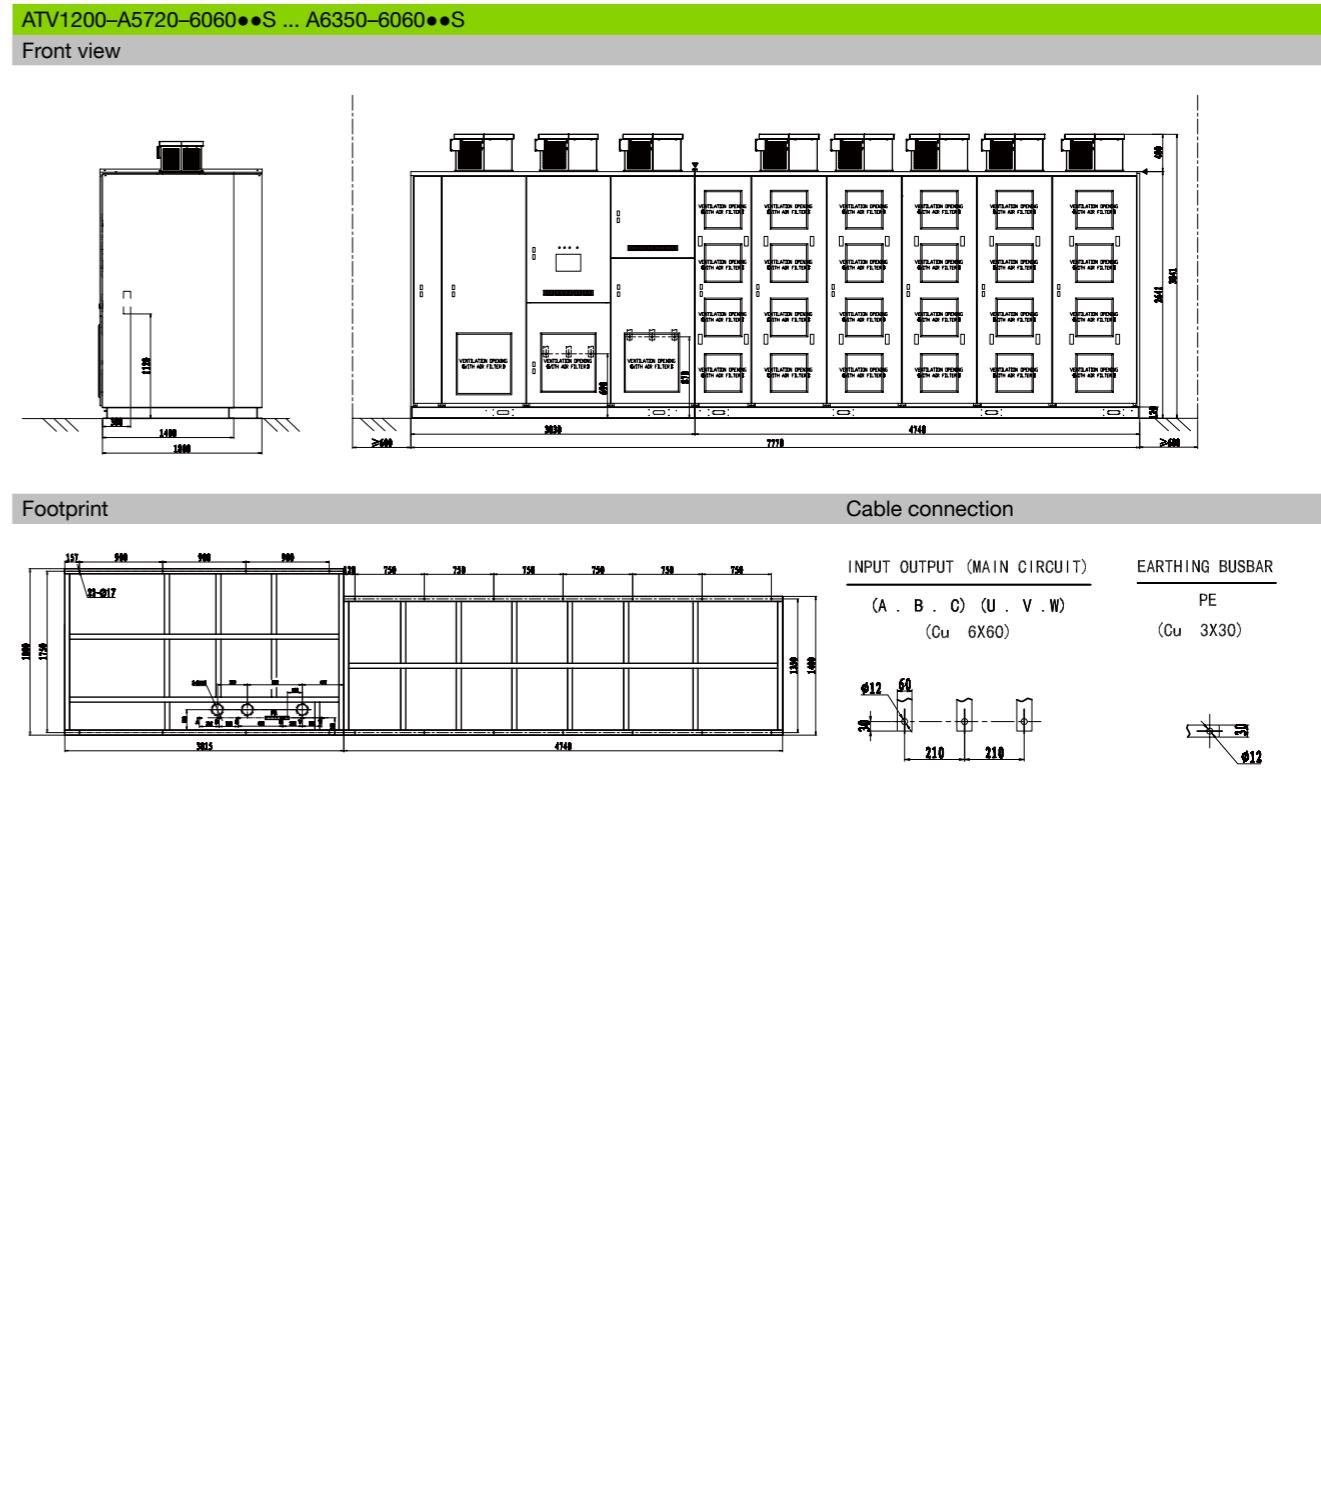

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | |
|--|-----------------------------|
| ATV1200 | A6860-6060••• |
| Nominal data | |
| Type rating [kVA] | 6860 |
| Motor power [kW] | 5735 |
| Continuous output current [A] | |
| With 120 % overload | 660 |
| With 150 % overload | 528 |
| Max. output current [A] | |
| 1 min/10 min | 792 |
| Power cells | |
| Number of cells per phase | 5 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.4 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 206 (incl. fan power) |
| High efficiency | ≤ 201 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 80000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 16500 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 8670x1600x3040 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

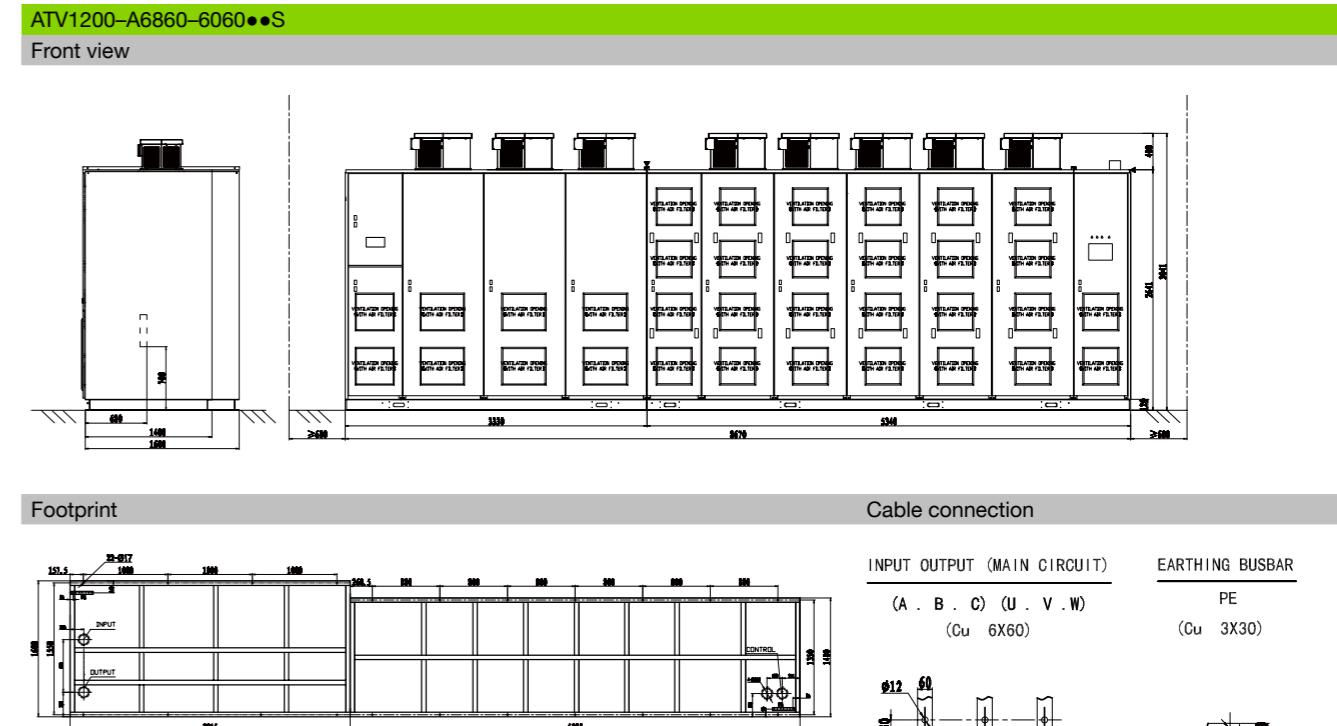

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV


| Technical data for output voltage 6.0 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A7500-6060••• | A8110-6060••• | A8840-6060••• |
| Nominal data | | | |
| Type rating [kVA] | 7500 | 8110 | 8840 |
| Motor power [kW] | | | |
| | 6270 | 6780 | 7390 |
| Continuous output current [A] | | | |
| With 120 % overload | 720 | 780 | 850 |
| With 150 % overload | 576 | 624 | 680 |
| Max. output current [A] | | | |
| 1 min/10 min | 864 | 936 | 1020 |
| Power cells | | | |
| Number of cells per phase | 5 | 5 | 5 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | ≥ 96.5 (incl. fan power) | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| Standard efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| High efficiency | | | |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 219 (incl. fan power) | ≤ 224 (incl. fan power) | ≤ 236 (incl. fan power) |
| High efficiency | | | |
| Air flow [m³/h] | | | |
| Standard efficiency | 90000 | 90000 | 90000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 18400 | 19900 | 20300 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 8970x1700x3040 | 8970x1700x3040 | 8970x1700x3040 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.0 kV

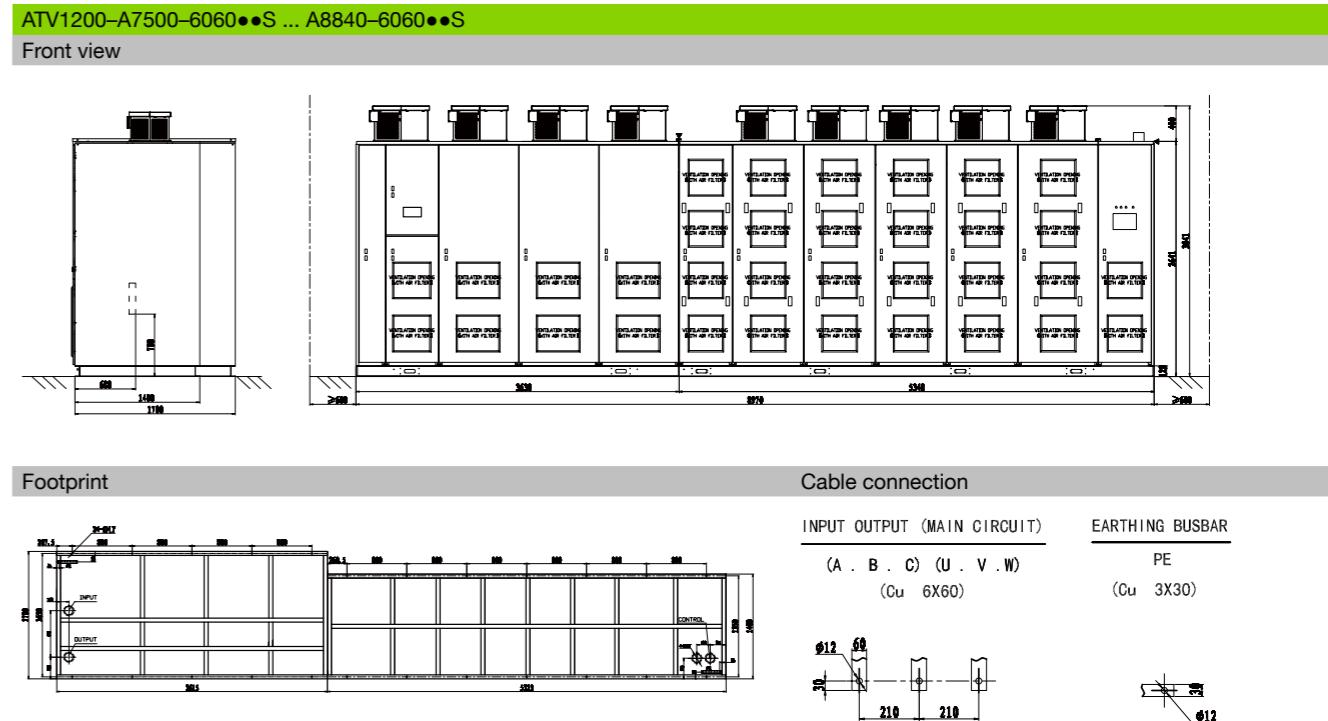

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

| Technical data for output voltage 6.3 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A450-6363••• | A530-6363••• |
| Nominal data | | |
| Type rating [kVA] | 450 | 530 |
| Motor power [kW] | 376 | 443 |
| Continuous output current [A] | | |
| With 120 % overload | 41 | 49 |
| With 150 % overload | 33 | 39 |
| Max. output current [A] | | |
| 1 min/10 min | 49 | 59 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 15 (incl. fan power) | ≤ 18 (incl. fan power) |
| High efficiency | ≤ 13 (incl. fan power) | ≤ 16 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 13200 | 13200 |
| High efficiency | 16500 | 16500 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 3100 | 3300 |
| High efficiency | 4000 | 4200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3060x1400x2520 | 3060x1400x2520 |
| High efficiency | 3360x1500x2670 | 3360x1500x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

| | | | | | |
|---------------------------------------|------------|-----------|------------------|---------------------------------------|-----------------|
| ATV1200-A450-6363••S ... A530-6363••S | Front view | Footprint | Cable connection | Input Output (Main Circuit) | Earthing Busbar |
| | | | | (A . B . C) (U . V . W.) (Cu 6x40) | PE (Cu 3x30) |
| | | | | | Σ |
| | | | | | Σ |
| | | | | | Σ |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV


| Technical data for output voltage 6.3 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A720-6363••• | A820-6363••• | A900-6363••• |
| Nominal data | | | |
| Type rating [kVA] | 720 | 820 | 900 |
| Motor power [kW] | | | |
| | 602 | 686 | 752 |
| Continuous output current [A] | | | |
| With 120 % overload | 65 | 75 | 82 |
| With 150 % overload | 52 | 60 | 66 |
| Max. output current [A] | | | |
| 1 min/10 min | 79 | 90 | 99 |
| Power cells | | | |
| Number of cells per phase | 6 | 6 | 6 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 24 (incl. fan power) | ≤ 27 (incl. fan power) | ≤ 30 (incl. fan power) |
| High efficiency | ≤ 21 (incl. fan power) | ≤ 24 (incl. fan power) | ≤ 26 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 13200 | 13200 | 13200 |
| High efficiency | 19800 | 19800 | 19800 |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 3500 | 3600 | 3800 |
| High efficiency | 4500 | 4600 | 4800 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 3060x1400x2520 | 3060x1400x2520 | 3060x1400x2520 |
| High efficiency | 3660x1500x2670 | 3660x1500x2670 | 3660x1500x2670 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

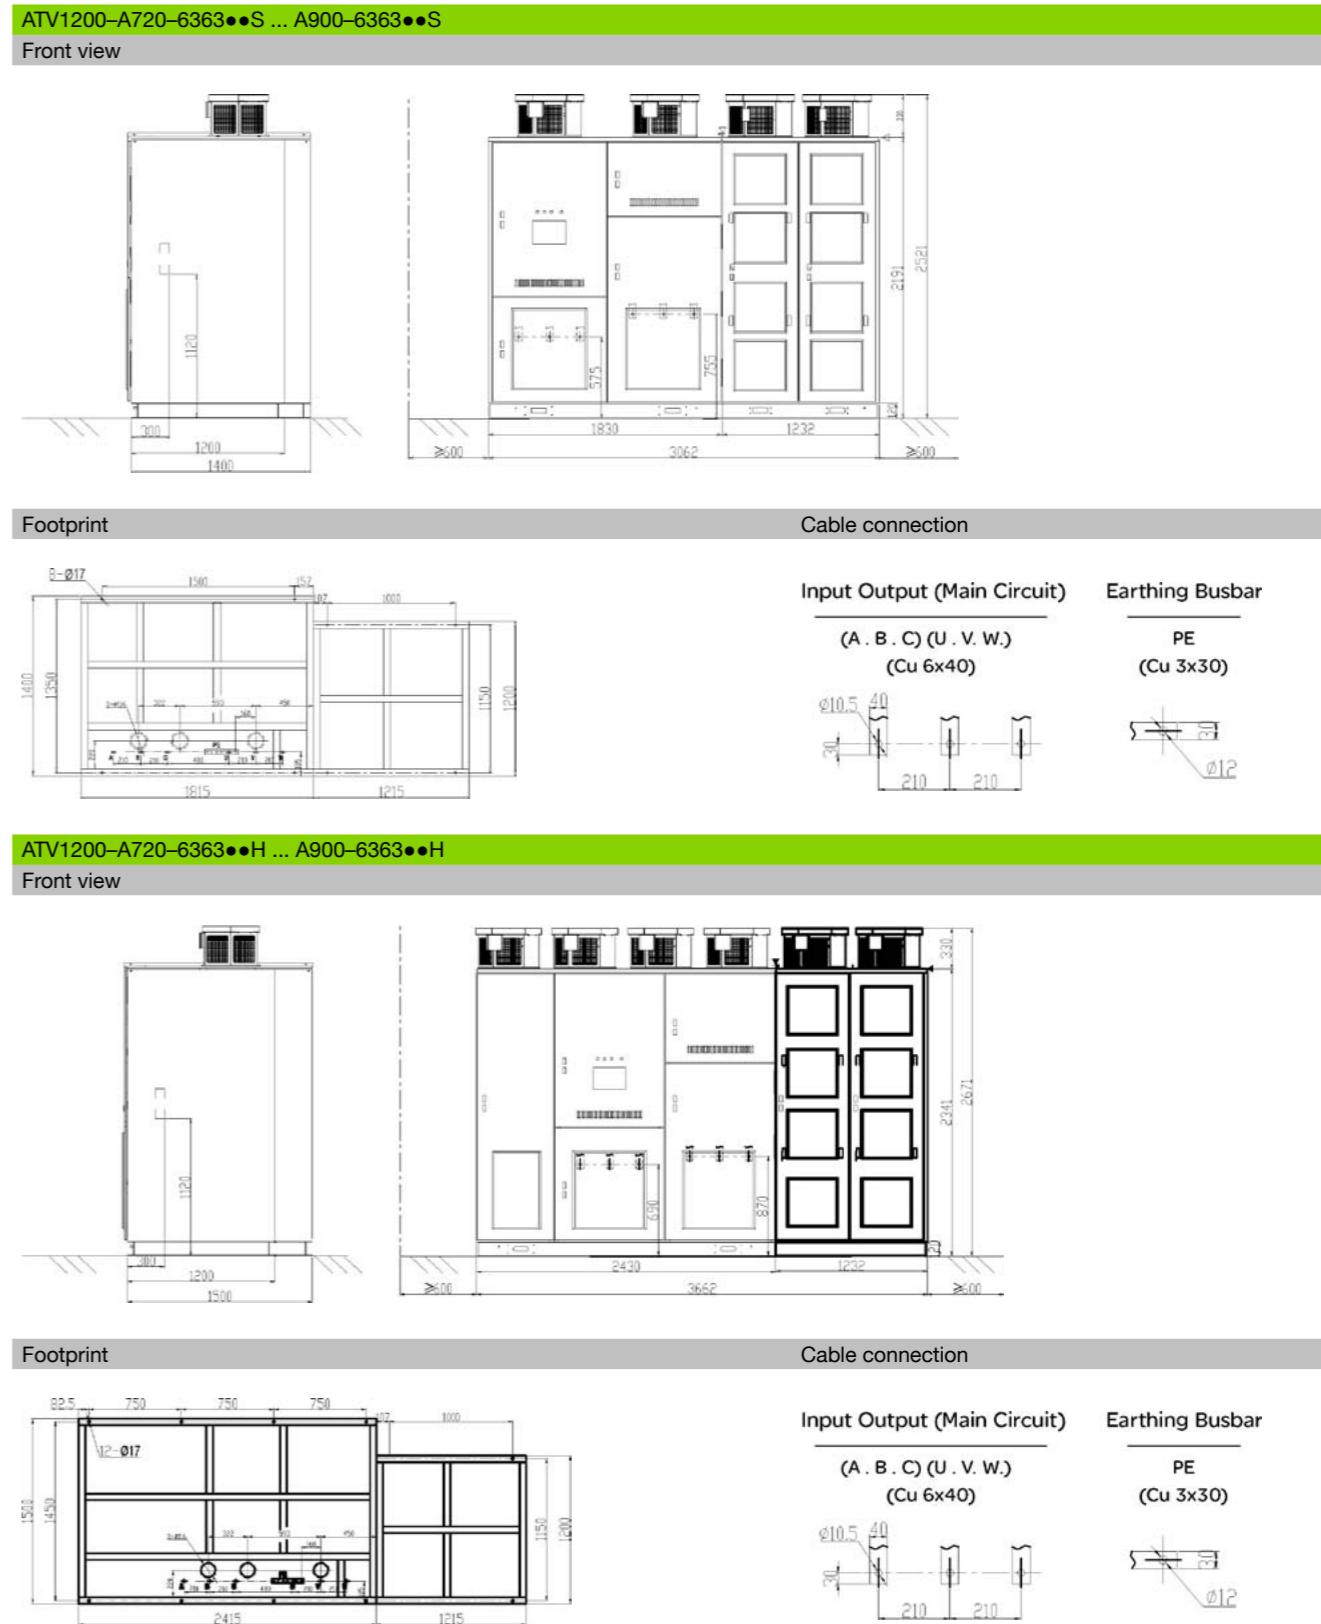

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1020-6363••• | A1100-6363••• |
| Nominal data | | |
| Type rating [kVA] | 1020 | 1100 |
| Motor power [kW] | 853 | 920 |
| Continuous output current [A] | | |
| With 120 % overload | 94 | 100 |
| With 150 % overload | 75 | 80 |
| Max. output current [A] | | |
| 1 min/10 min | 112 | 120 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 34 (incl. fan power) | ≤ 37 (incl. fan power) |
| High efficiency | ≤ 30 (incl. fan power) | ≤ 32 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 4100 | 4200 |
| High efficiency | 5100 | 5200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3360x1400x2520 | 3360x1400x2520 |
| High efficiency | 3660x1600x2670 | 3660x1600x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A1020-6363••S ... A1100-6363••S



Front view

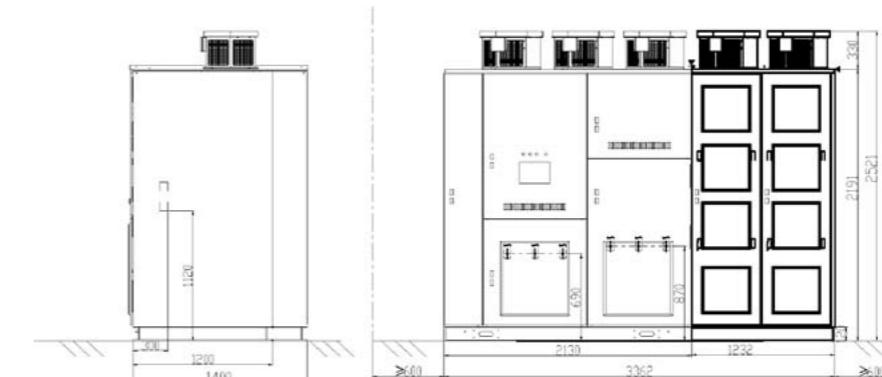

Footprint

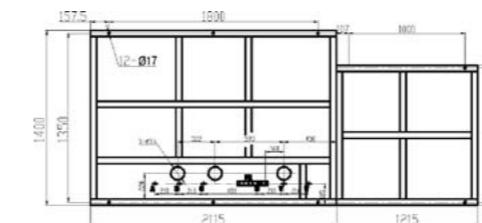


Cable connection




ATV1200-A1020-6363••H ... A1100-6363••H



Front view

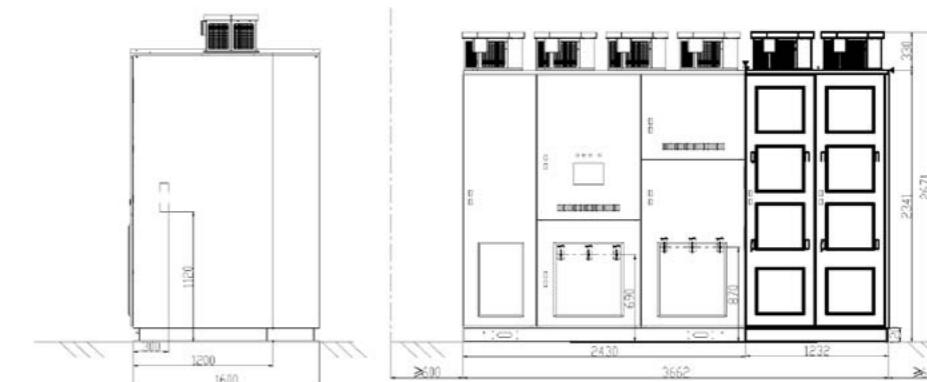

Footprint

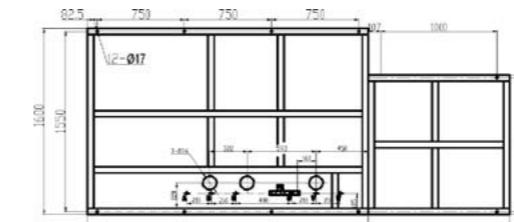

Cable connection



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1190-6363••• | A1480-6363••• |
| Nominal data | | |
| Type rating [kVA] | 1190 | 1480 |
| Motor power [kW] | 995 | 1237 |
| Continuous output current [A] | | |
| With 120 % overload | 109 | 135 |
| With 150 % overload | 87 | 108 |
| Max. output current [A] | | |
| 1 min/10 min | 131 | 162 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 40 (incl. fan power) | ≤ 49 (incl. fan power) |
| High efficiency | ≤ 35 (incl. fan power) | ≤ 43 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 5000 | 5500 |
| High efficiency | 5900 | 6200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3960x1500x2670 | 3960x1500x2670 |
| High efficiency | 4260x1600x2670 | 4260x1600x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A1190-6363••S ... A1480-6363••S


Front view

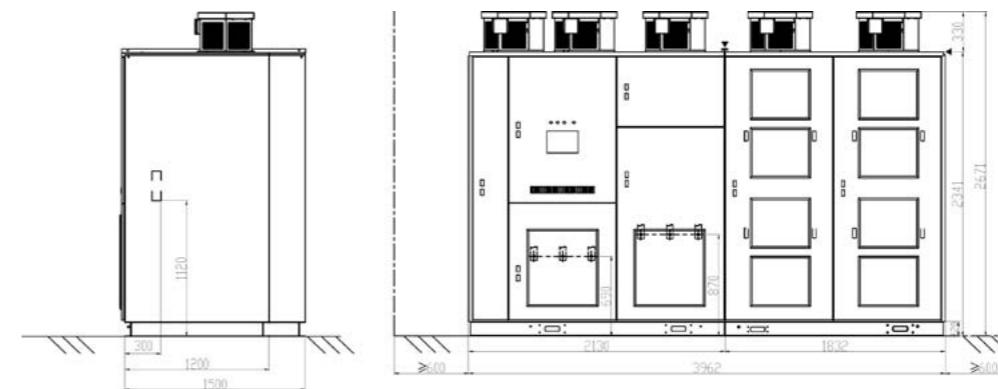

Footprint

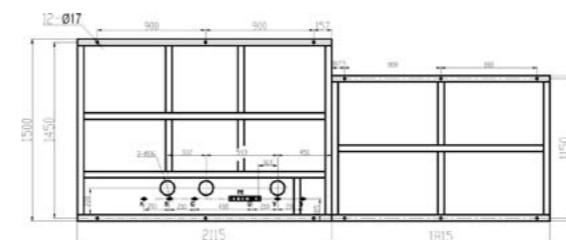


Cable connection

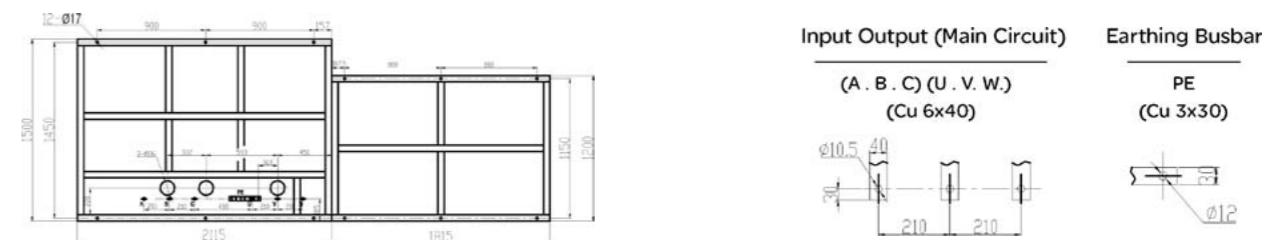


ATV1200-A1190-6363••H ... A1480-6363••H


Front view

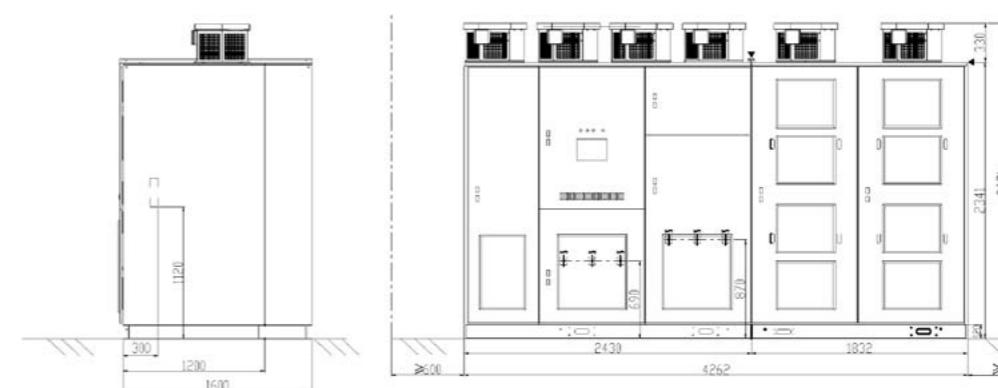

Footprint

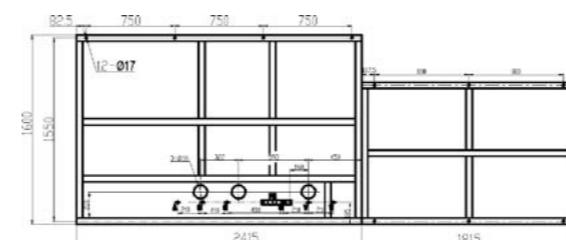

Cable connection

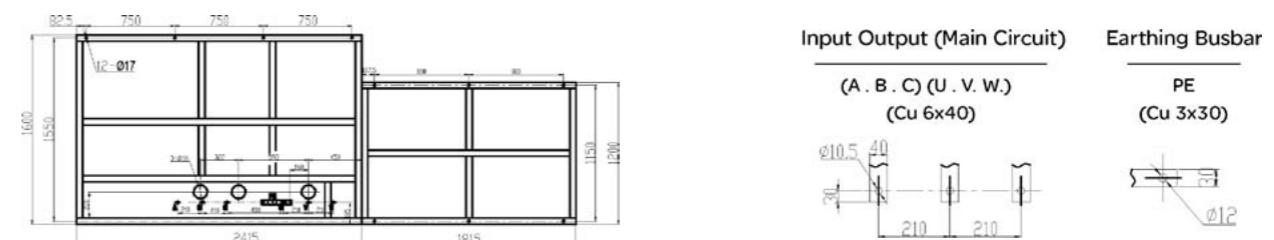

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV


| Technical data for output voltage 6.3 kV | |
|--|-----------------------------|
| ATV1200 | A1640-6363••• |
| Nominal data | |
| Type rating [kVA] | 1640 |
| Motor power [kW] | 1371 |
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 55 (incl. fan power) |
| High efficiency | ≤ 48 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5800 |
| High efficiency | 6500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3960x1500x2740 |
| High efficiency | 4260x1600x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

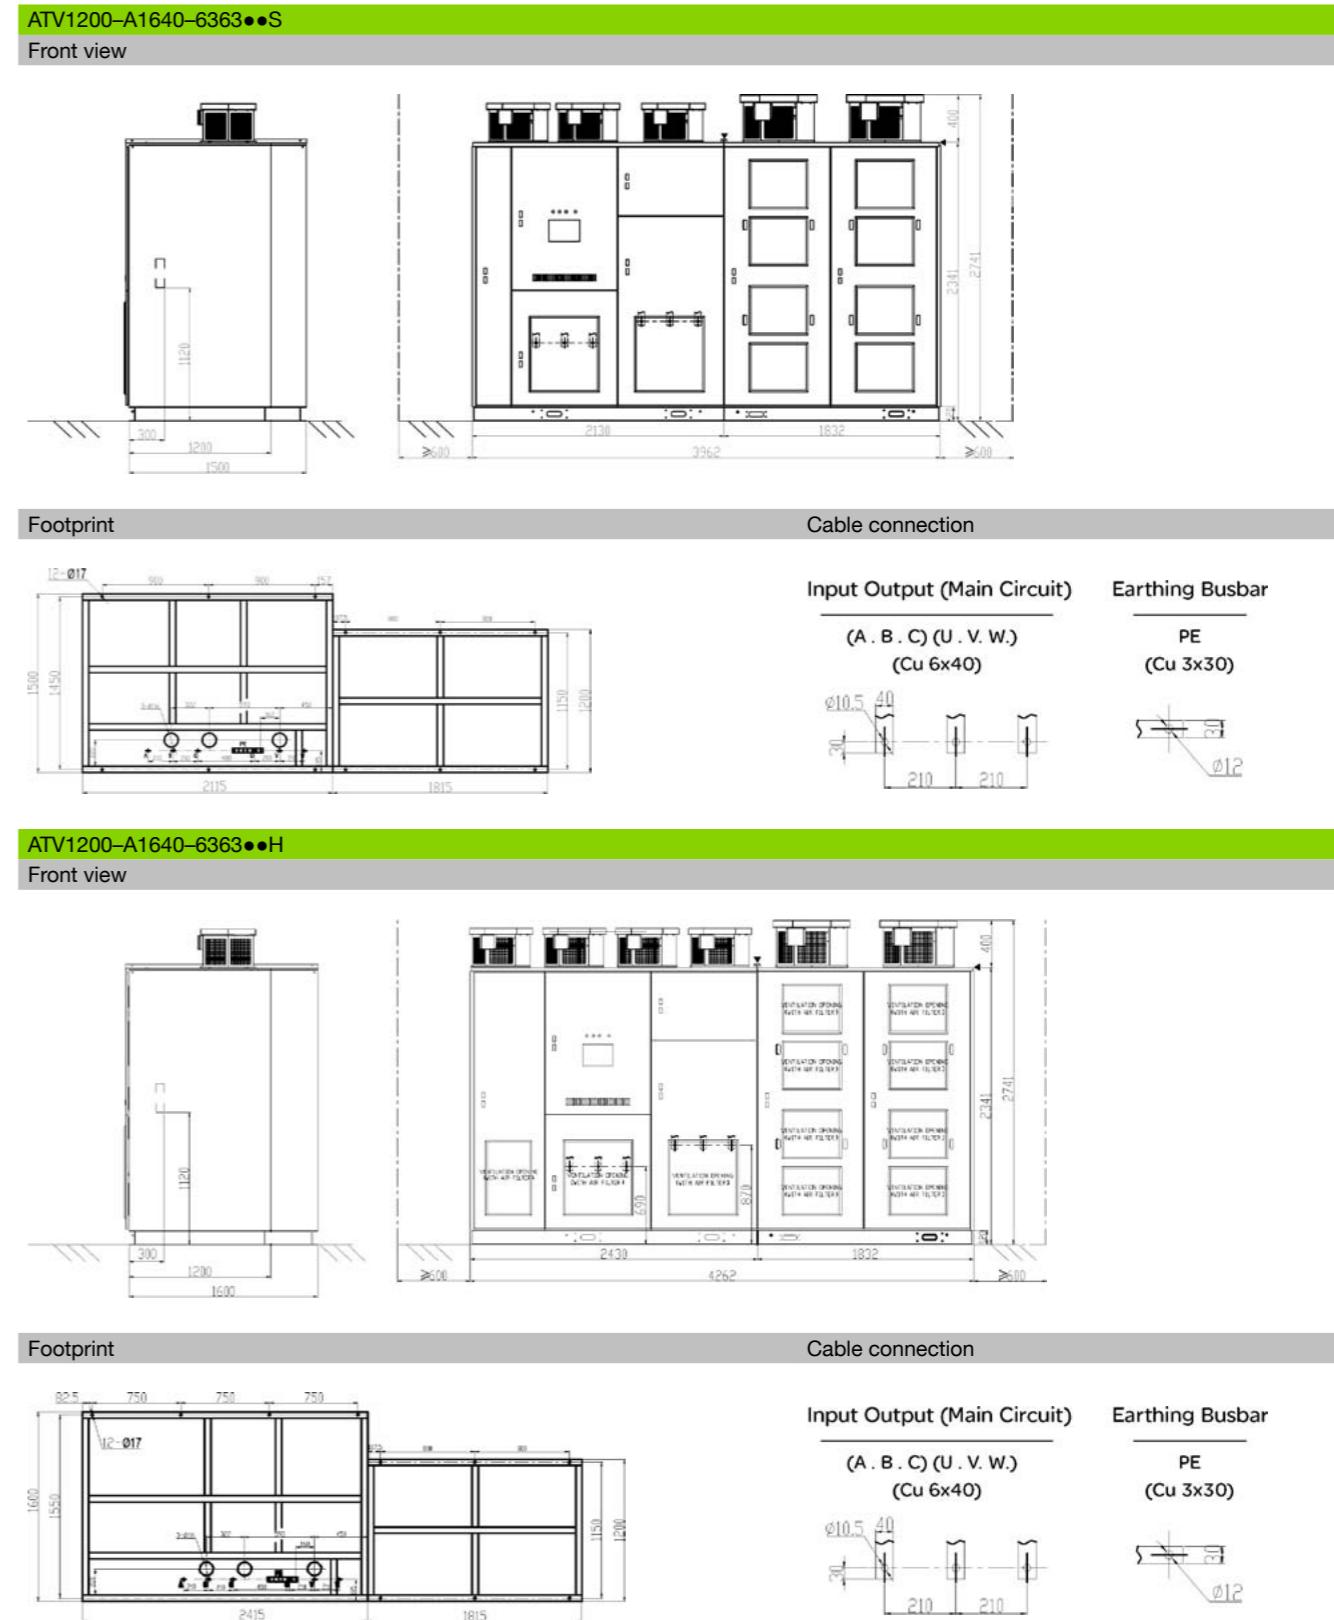

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1970-6363••• | A2190-6363••• |
| Nominal data | | |
| Type rating [kVA] | 1970 | 2190 |
| Motor power [kW] | 1647 | 1831 |
| Continuous output current [A] | | |
| With 120 % overload | 180 | 200 |
| With 150 % overload | 144 | 160 |
| Max. output current [A] | | |
| 1 min/10 min | 216 | 240 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 66 (incl. fan power) | ≤ 73 (incl. fan power) |
| High efficiency | ≤ 58 (incl. fan power) | ≤ 64 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 23100 | 23100 |
| High efficiency | 23100 | 23100 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 7200 | 7500 |
| High efficiency | 7900 | 8200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1600x2670 | 5170x1600x2670 |
| High efficiency | 5470x1700x2670 | 5470x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A1970-6363••S ... A2190-6363••S



Front view

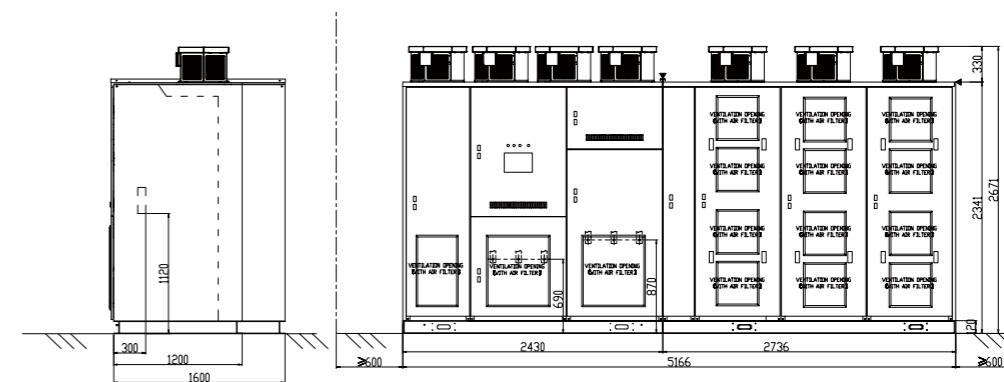

Footprint

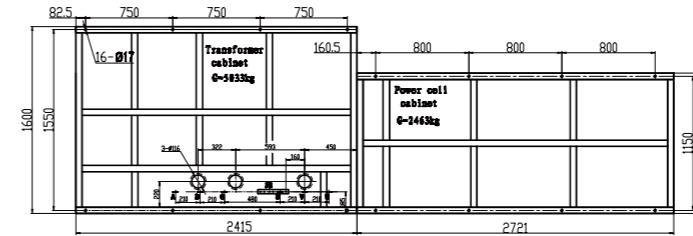


Cable connection




ATV1200-A1970-6363••H ... A2190-6363••H



Front view

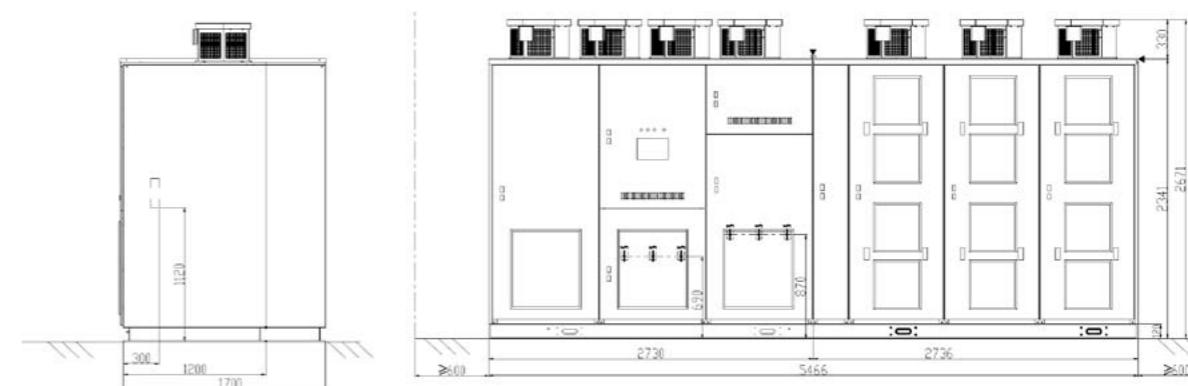

Footprint

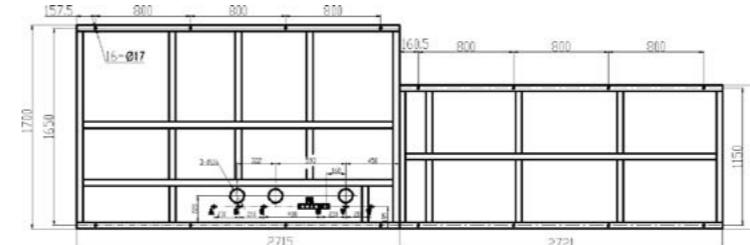

Cable connection



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

ATV1200 A2400-6363•••

Nominal data

Type rating [kVA]

2400

Motor power [kW]

2006

Continuous output current [A]

With 120 % overload

220

With 150 % overload

176

Max. output current [A]

1 min/10 min

264

Power cells

Number of cells per phase

6

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 80
(incl. fan power)

High efficiency

≤ 70
(incl. fan power)

Air flow [m³/h]

Standard efficiency

23100

High efficiency

23100

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

7800

High efficiency

8800

Dimension[mm] W*D*H

Standard efficiency

5170x1700x2670

High efficiency

5470x1700x2670

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A2400-6363••S

Front view

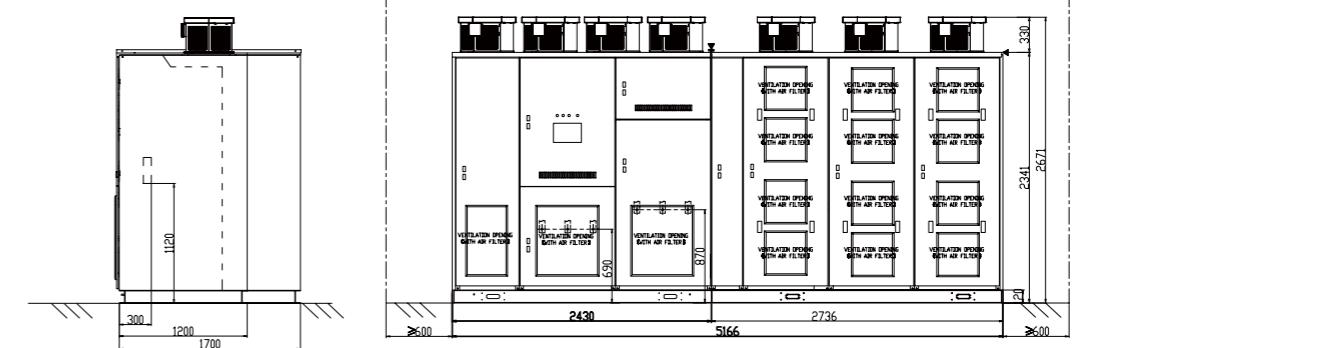


Footprint

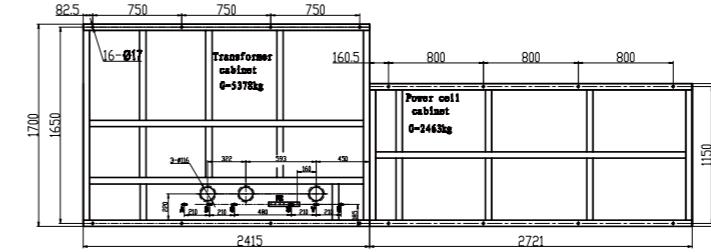


Cable connection

Input Output (Main Circuit)
(A . B . C) (U . V . W.)
(Cu 6x40)




Earthing Busbar
PE
(Cu 3x30)




ATV1200-A2400-6363••H

Front view

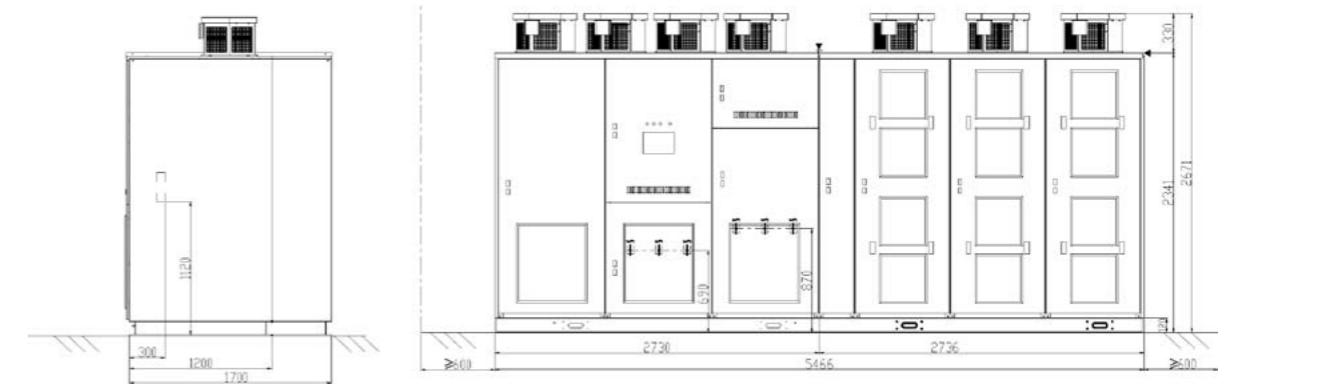


Footprint

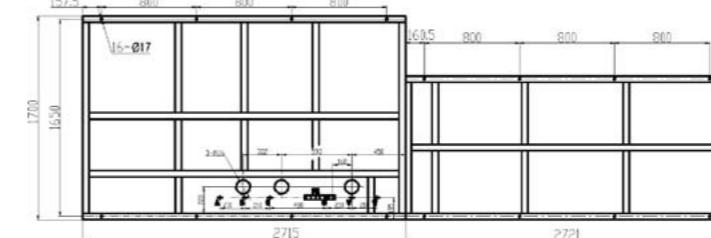


Cable connection

Input Output (Main Circuit)
(A . B . C) (U . V . W.)
(Cu 6x40)



Earthing Busbar
PE
(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2670-6363••• | A3050-6363••• |
| Nominal data | | |
| Type rating [kVA] | 2670 | 3050 |
| Motor power [kW] | 2232 | 2550 |
| Continuous output current [A] | | |
| With 120 % overload | 245 | 280 |
| With 150 % overload | 196 | 224 |
| Max. output current [A] | | |
| 1 min/10 min | 294 | 336 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 89 (incl. fan power) | ≤ 102 (incl. fan power) |
| High efficiency | ≤ 78 (incl. fan power) | ≤ 89 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 43200 | 43200 |
| High efficiency | 43200 | 43200 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 8300 | 8700 |
| High efficiency | 9100 | 9600 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1700x2740 | 5170x1700x2740 |
| High efficiency | 5470x1700x2740 | 5470x1700x2740 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A2670-6363••S ... A3050-6363••S

Front view

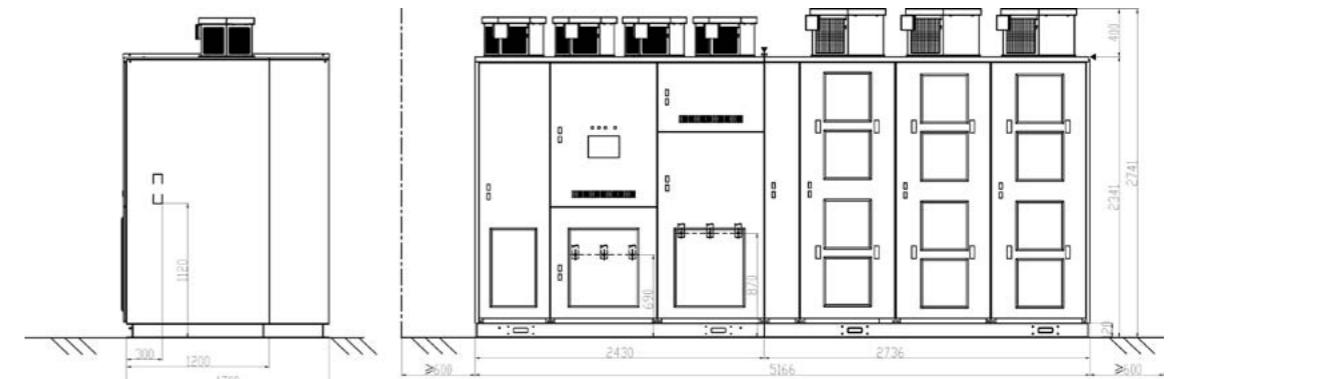


Footprint

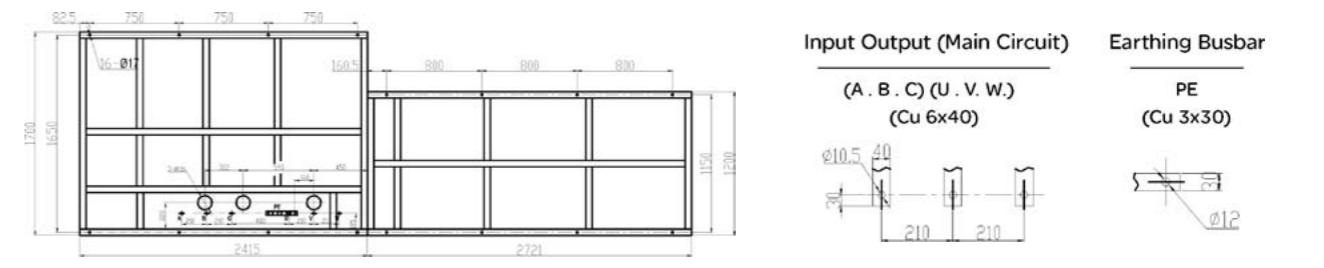


Cable connection

ATV1200-A2670-6363••H ... A3050-6363••H


Front view

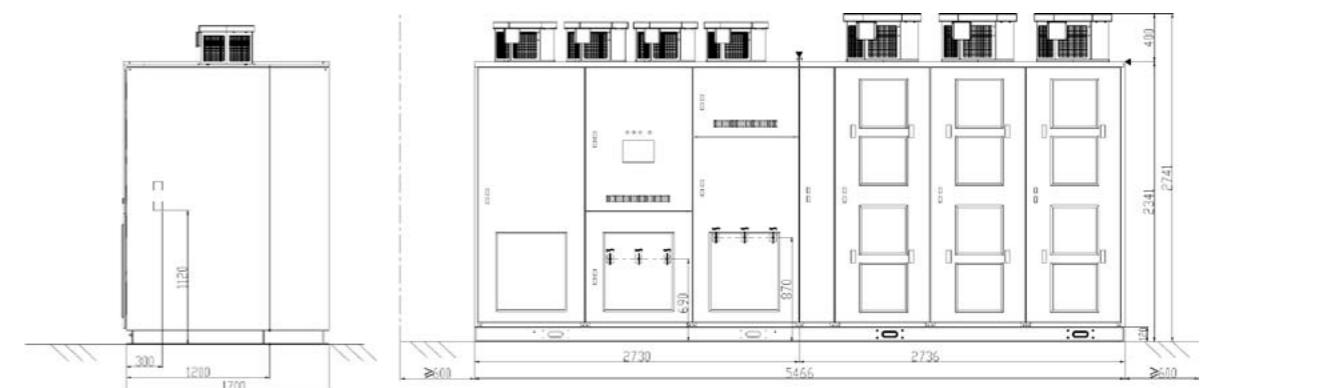

Footprint

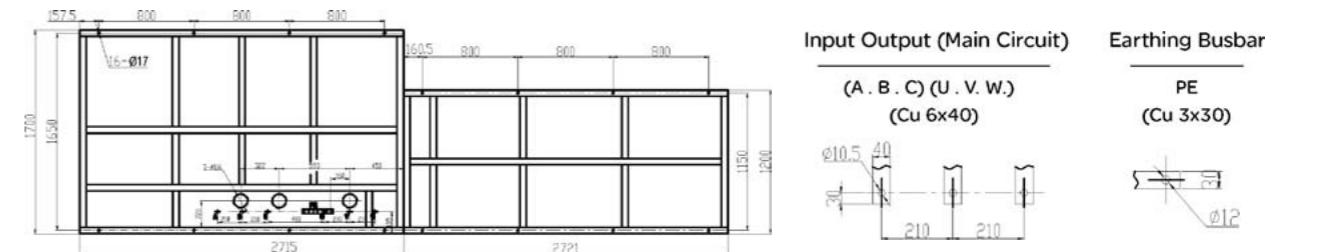

Cable connection

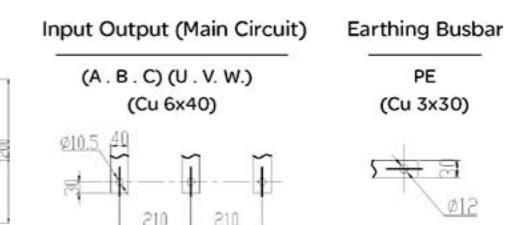

Technical data

Altivar 1200

Medium Voltage Drive Systems
Output voltage 6.3 kV

| Technical data for output voltage 6.3 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A3490-6363••• | A3760-6363••• |
| Nominal data | | |
| Type rating [kVA] | 3490 | 3760 |
| Motor power [kW] | 2918 | 3143 |
| Continuous output current [A] | | |
| With 120 % overload | 320 | 345 |
| With 150 % overload | 456 | 276 |
| Max. output current [A] | | |
| 1 min/10 min | 384 | 414 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 117 (incl. fan power) | ≤ 126 (incl. fan power) |
| High efficiency | ≤ 102 (incl. fan power) | ≤ 110 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 33000 | 33000 |
| High efficiency | 33000 | 33000 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 11200 | 11800 |
| High efficiency | 11800 | 12400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6670x1700x2670 | 6670x1700x2670 |
| High efficiency | 6670x1700x2970 | 6670x1700x2970 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems
Output voltage 6.3 kV

| ATV1200-A3490-6363••S ... A3760-6363••S | | |
|---|-----------------|--|
| Front view | | |
| | | |
| | | |
| Cable connection | | |
| Input Output (Main Circuit) | Earthing Busbar | |
| (A . B . C) (U . V . W.) (Cu 6x40) | PE (Cu 3x30) | |
| ATV1200-A3490-6363••H ... A3760-6363••H | | |
| Front view | | |
| | | |
| | | |
| Cable connection | | |
| Input Output (Main Circuit) | Earthing Busbar | |
| (A . B . C) (U . V . W.) (Cu 6x40) | PE (Cu 3x30) | |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

| Technical data for output voltage 6.3 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A4240-6363••• | A4470-6363••• |
| Nominal data | | |
| Type rating [kVA] | 4240 | 4470 |
| Motor power [kW] | 3545 | 3737 |
| Continuous output current [A] | | |
| With 120 % overload | 388 | 410 |
| With 150 % overload | 311 | 328 |
| Max. output current [A] | | |
| 1 min/10 min | 466 | 492 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 142 (incl. fan power) | ≤ 149 (incl. fan power) |
| High efficiency | ≤ 124 (incl. fan power) | ≤ 131 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 49800 | 49800 |
| High efficiency | 49800 | 49800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 12400 | 12400 |
| High efficiency | 13100 | 13400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6670x1700x2740 | 6670x1700x2740 |
| High efficiency | 6970x1800x3040 | 6970x1800x3040 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

ATV1200 A4770-6363•••

Nominal data

Type rating [kVA]

4770

Motor power [kW]

3988

Continuous output current [A]

With 120 % overload

437

With 150 % overload

350

Max. output current [A]

1 min/10 min

525

Power cells

Number of cells per phase

6

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96.1
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 156
(incl. fan power)

High efficiency

≤ 140
(incl. fan power)

Air flow [m³/h]

Standard efficiency

49800

High efficiency

49800

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

13300

High efficiency

13600

Dimension[mm] W*D*H

Standard efficiency

6670x1800x2740

High efficiency

6970x1800x3040

Connection

Incoming cable

Type standard symmetrical

Max. size see drawing

Motor cable

Type 3 core

Max. size see drawing

Max. length (without filter) 2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A4770-6363••S

Front view

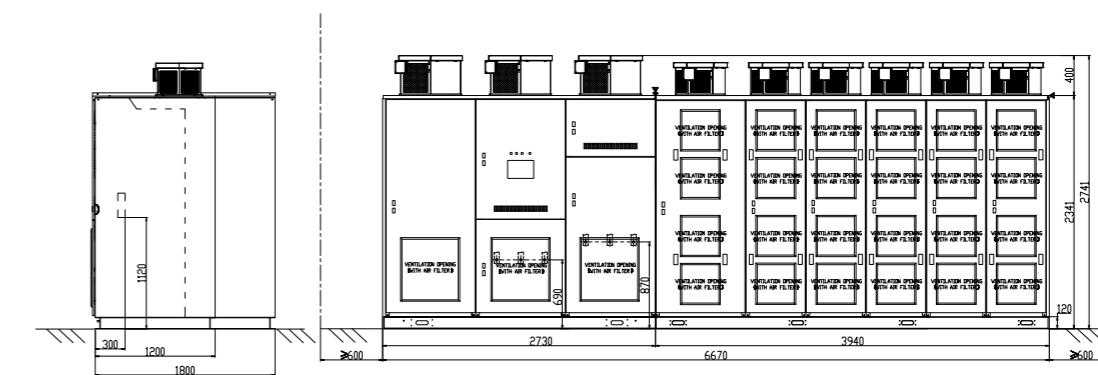


Footprint

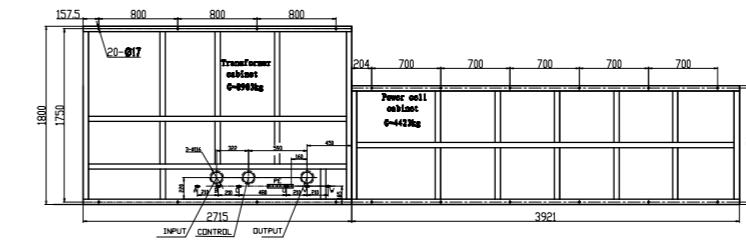


ATV1200-A4770-6363••H

Front view

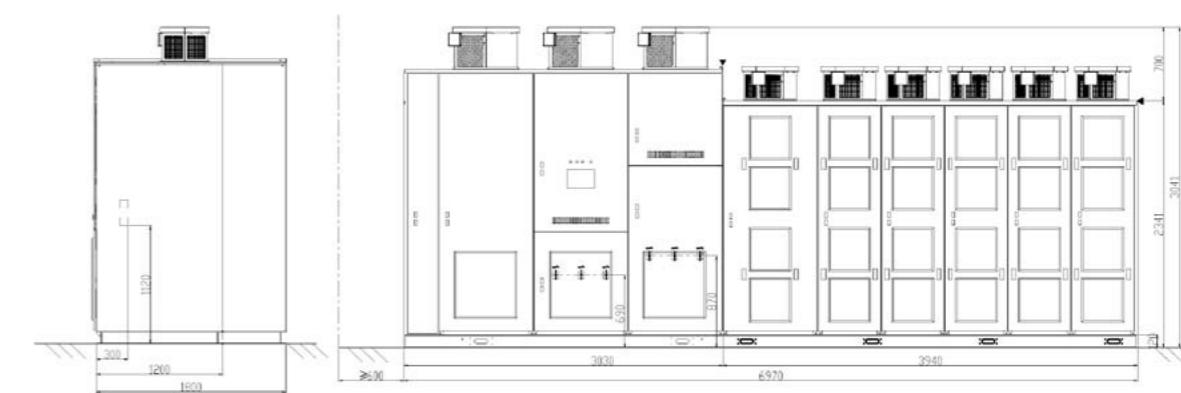

Footprint

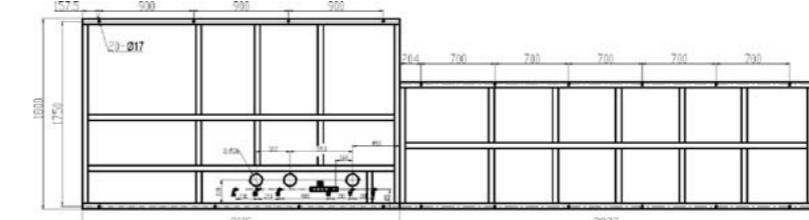

Cable connection

Input Output (Main Circuit)

(A . B . C) (U . V . W.)


(Cu 6x40)



Earthing Busbar

PE

(Cu 3x30)



Cable connection

Input Output (Main Circuit)

(A . B . C) (U . V . W.)

(Cu 6x40)



Earthing Busbar

PE

(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

| Technical data for output voltage 6.3 kV | |
|--|-----------------------------|
| ATV1200 | A5350-6363••• |
| Nominal data | |
| Type rating [kVA] | 5350 |
| Motor power [kW] | 4473 |
| Continuous output current [A] | |
| With 120 % overload | 490 |
| With 150 % overload | 392 |
| Max. output current [A] | |
| 1 min/10 min | 588 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.2 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 170 (incl. fan power) |
| High efficiency | ≤ 157 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 80000 |
| High efficiency | 80000 |
| Sound pressure level [dB(A)] | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 13800 |
| High efficiency | 14000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6670x1800x2820 |
| High efficiency | 6970x1800x3040 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV


| Technical data for output voltage 6.3 kV | |
|--|-----------------------------|
| ATV1200 | A6000-6363••• |
| Nominal data | |
| Type rating [kVA] | 6000 |
| Motor power [kW] | 5016 |
| Continuous output current [A] | |
| With 120 % overload | 550 |
| With 150 % overload | 440 |
| Max. output current [A] | |
| 1 min/10 min | 660 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.3 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 186 (incl. fan power) |
| High efficiency | ≤ 176 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 90000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 16700 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 8570x1800x3040 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

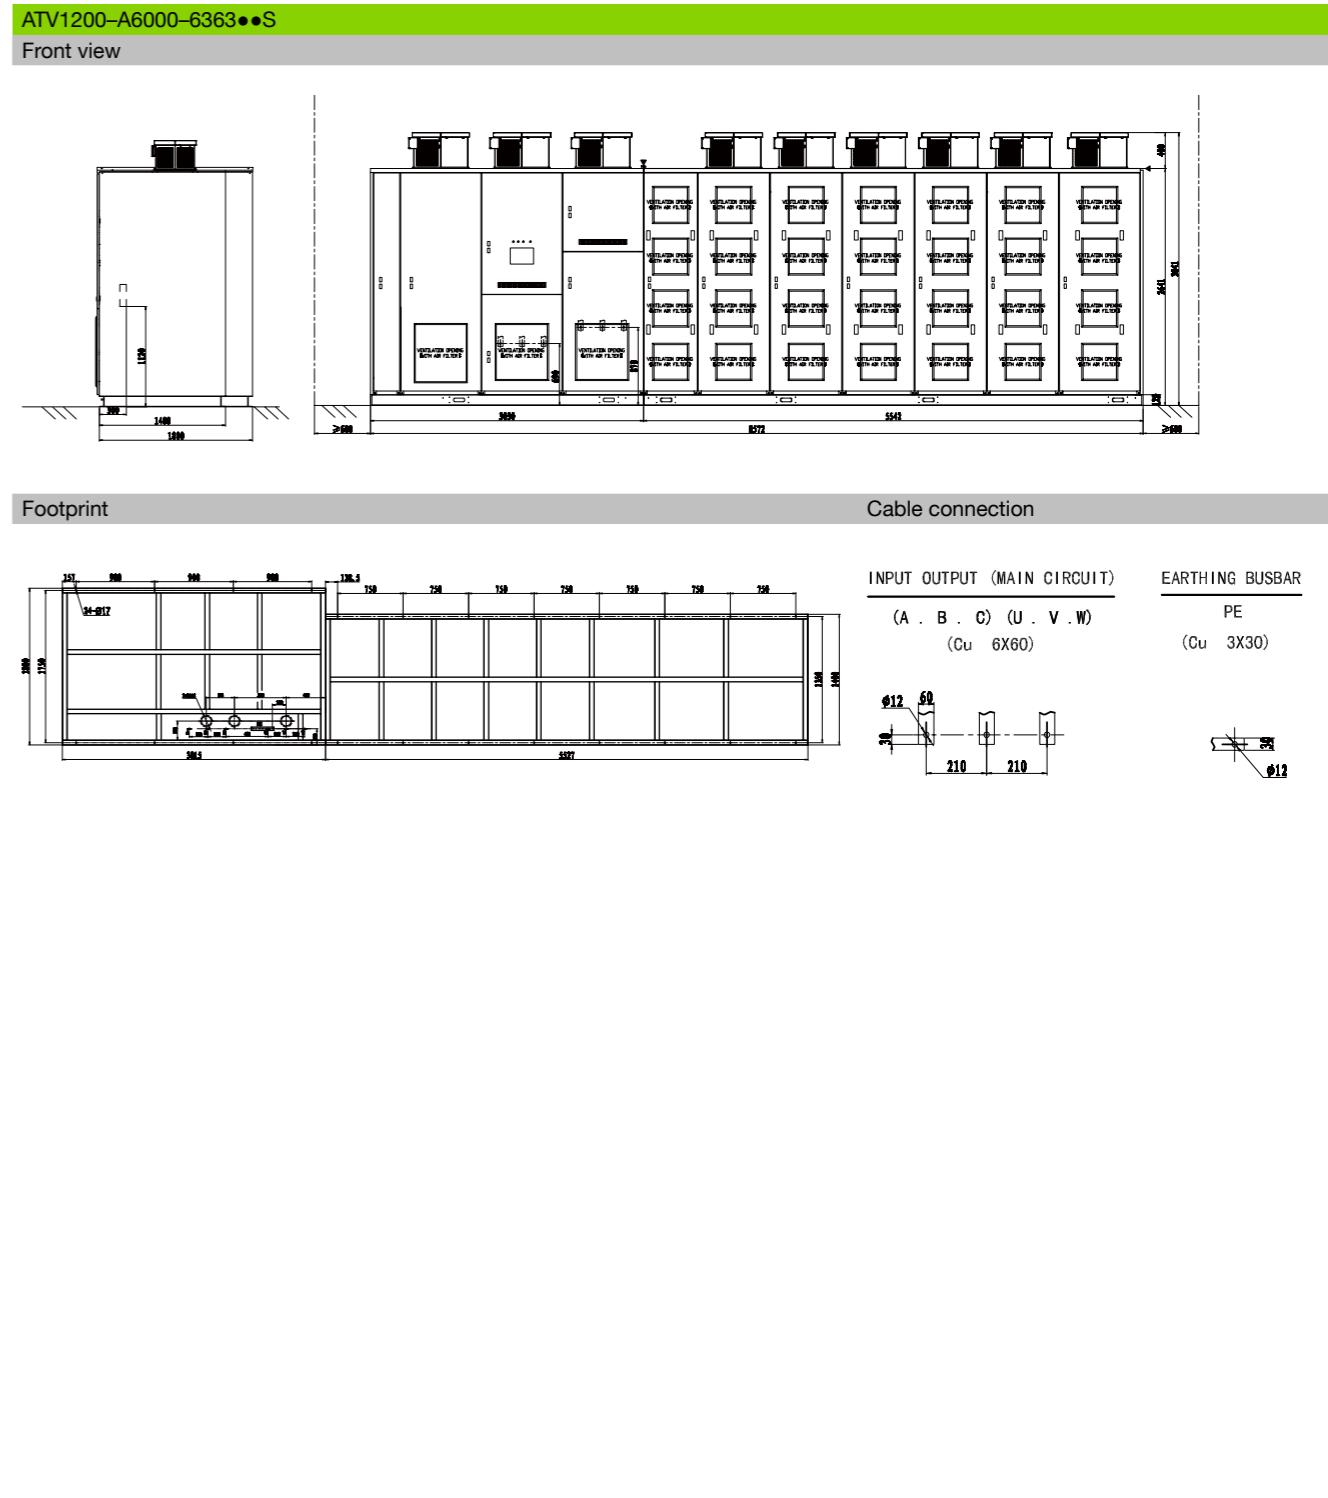

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A6660-6363••• | A7200-6363••• |
| Nominal data | | |
| Type rating [kVA] | 6660 | 7200 |
| Motor power [kW] | 5568 | 6019 |
| Continuous output current [A] | | |
| With 120 % overload | 612 | 660 |
| With 150 % overload | 490 | 528 |
| Max. output current [A] | | |
| 1 min/10 min | 735 | 793 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 195 (incl. fan power) | ≤ 211 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 90000 | 90000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 18300 | 19000 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 9470x1600x3040 | 9470x1600x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A6660-6363••S ... A7200-6363••S


Front view

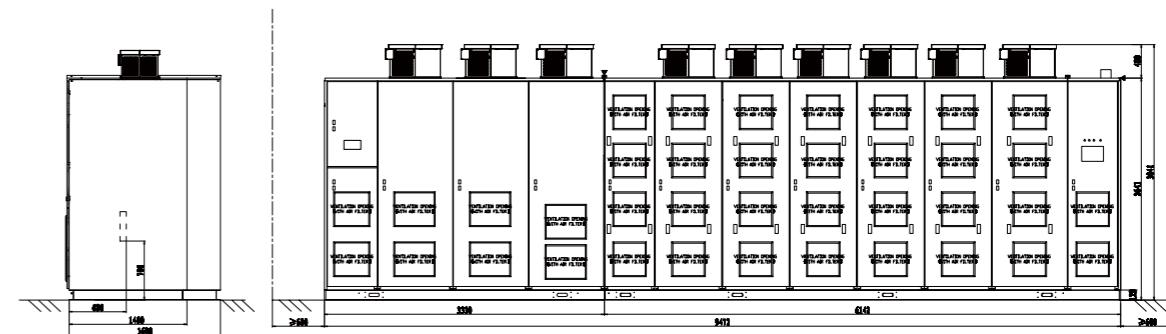

Footprint

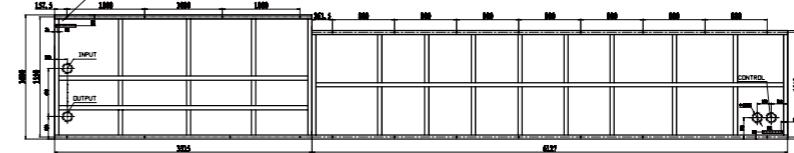

Cable connection

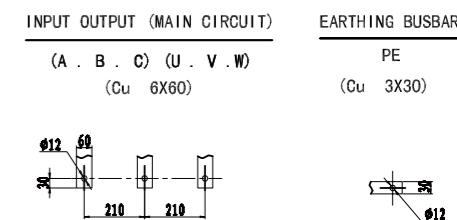

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

Technical data for output voltage 6.3 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A7860-6363••• | A8550-6363••• |
| Nominal data | | |
| Type rating [kVA] | 7860 | 8550 |
| Motor power [kW] | 6571 | 7148 |
| Continuous output current [A] | | |
| With 120 % overload | 720 | 783 |
| With 150 % overload | 576 | 626 |
| Max. output current [A] | | |
| 1 min/10 min | 864 | 940 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 217 (incl. fan power) | ≤ 229 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 100000 | 100000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 20800 | 21400 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 9770x1700x3040 | 9770x1700x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data



Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.3 kV

ATV1200-A7860-6363••S ... A8550-6363••S


Front view

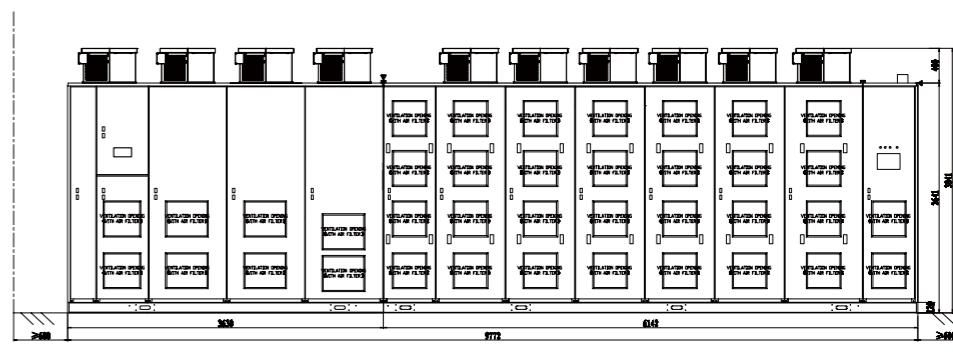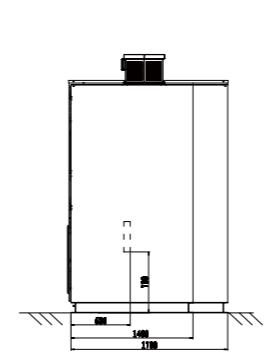

Footprint

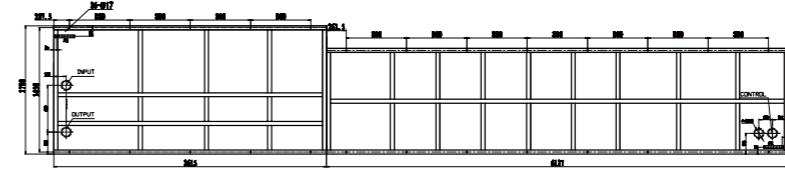

Cable connection

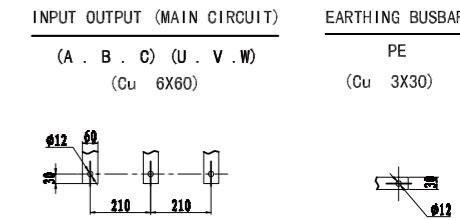

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV


| Technical data for output voltage 6.3 kV | |
|--|-----------------------------|
| ATV1200 | A9300-6363••• |
| Nominal data | |
| Type rating [kVA] | 9300 |
| Motor power [kW] | 7775 |
| Continuous output current [A] | |
| With 120 % overload | 850 |
| With 150 % overload | 680 |
| Max. output current [A] | |
| 1 min/10 min | 1020 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.9 (incl. fan power) |
| High efficiency | |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 241 (incl. fan power) |
| High efficiency | |
| Air flow [m³/h] | |
| Standard efficiency | 100000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 22300 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 9770x1700x3340 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.3 kV

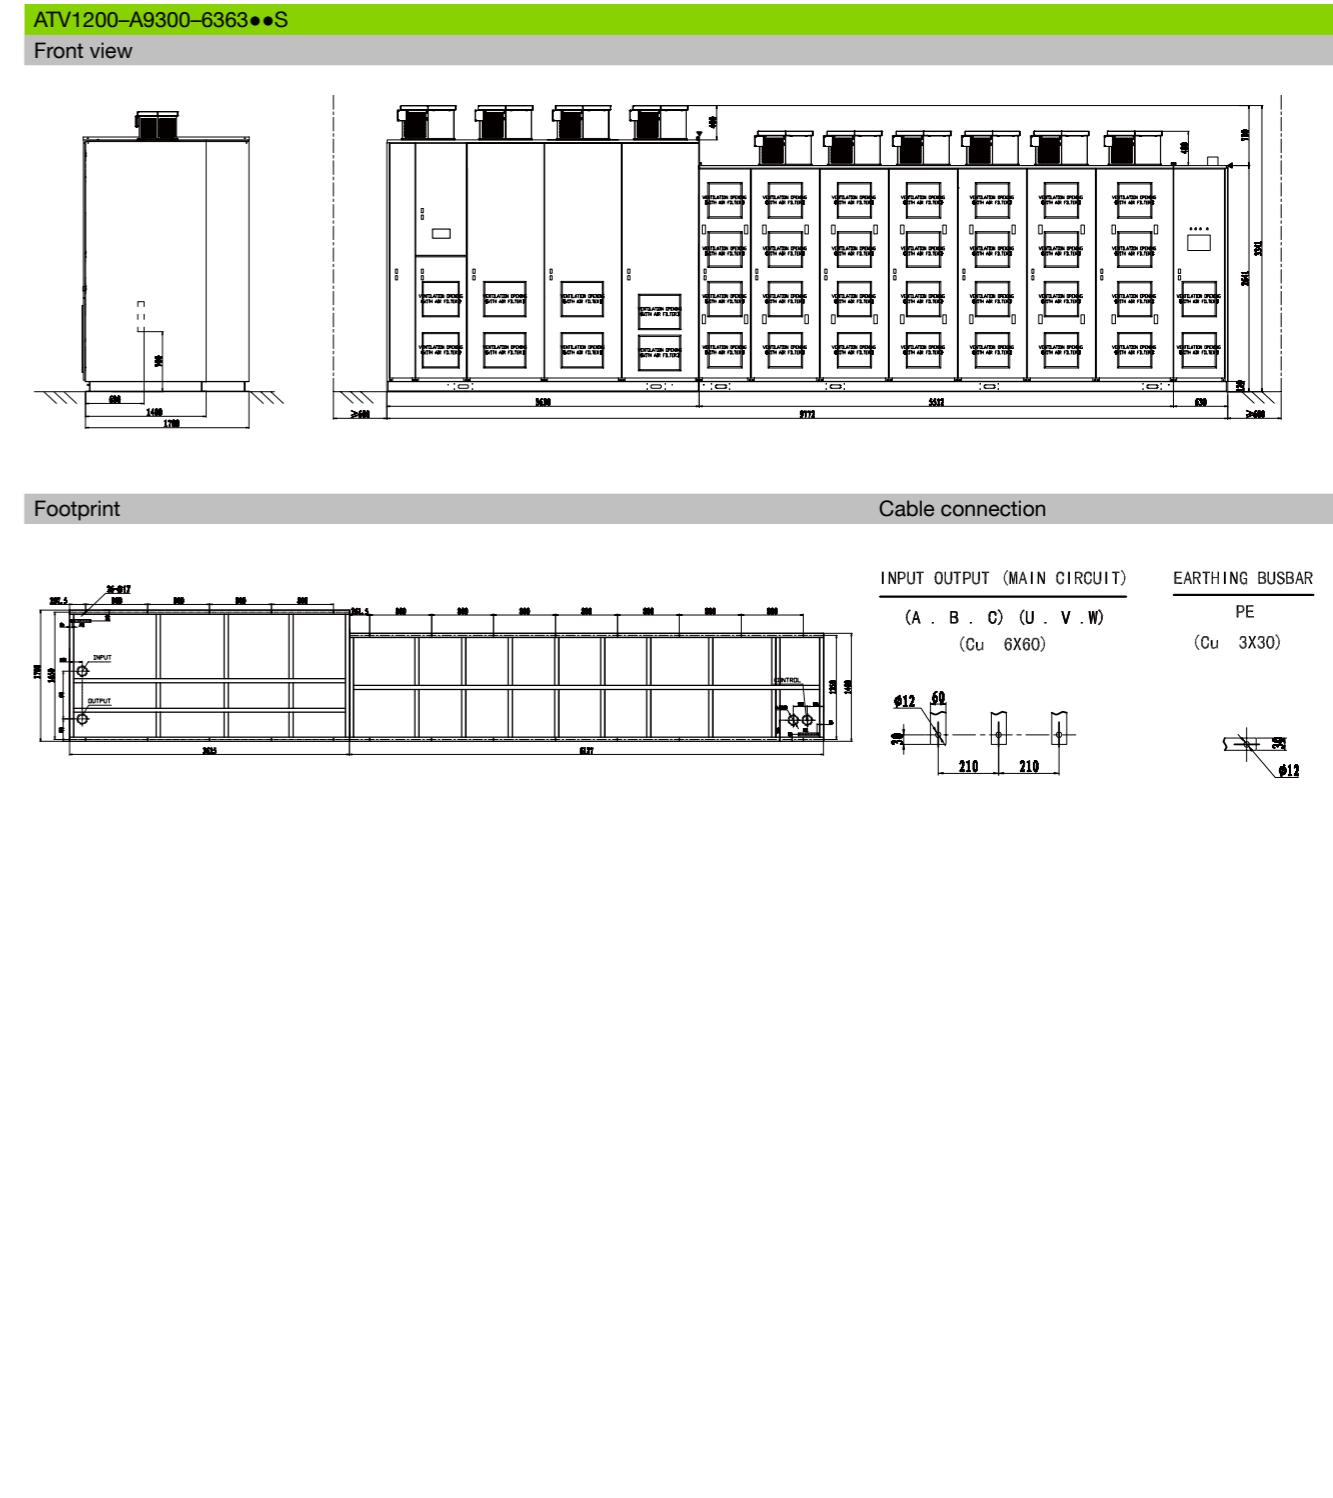

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV


| Technical data for output voltage 6.6 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A470-6666••• | A560-6666••• |
| Nominal data | | |
| Type rating [kVA] | 470 | 560 |
| Motor power [kW] | 393 | 468 |
| Continuous output current [A] | | |
| With 120 % overload | 41 | 49 |
| With 150 % overload | 33 | 39 |
| Max. output current [A] | | |
| 1 min/10 min | 49 | 59 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 16 (incl. fan power) | ≤ 19 (incl. fan power) |
| High efficiency | ≤ 14 (incl. fan power) | ≤ 16 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 13200 | 13200 |
| High efficiency | 16500 | 16500 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 3100 | 3300 |
| High efficiency | 4000 | 4200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3060x1400x2520 | 3060x1400x2520 |
| High efficiency | 3360x1500x2670 | 3360x1500x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

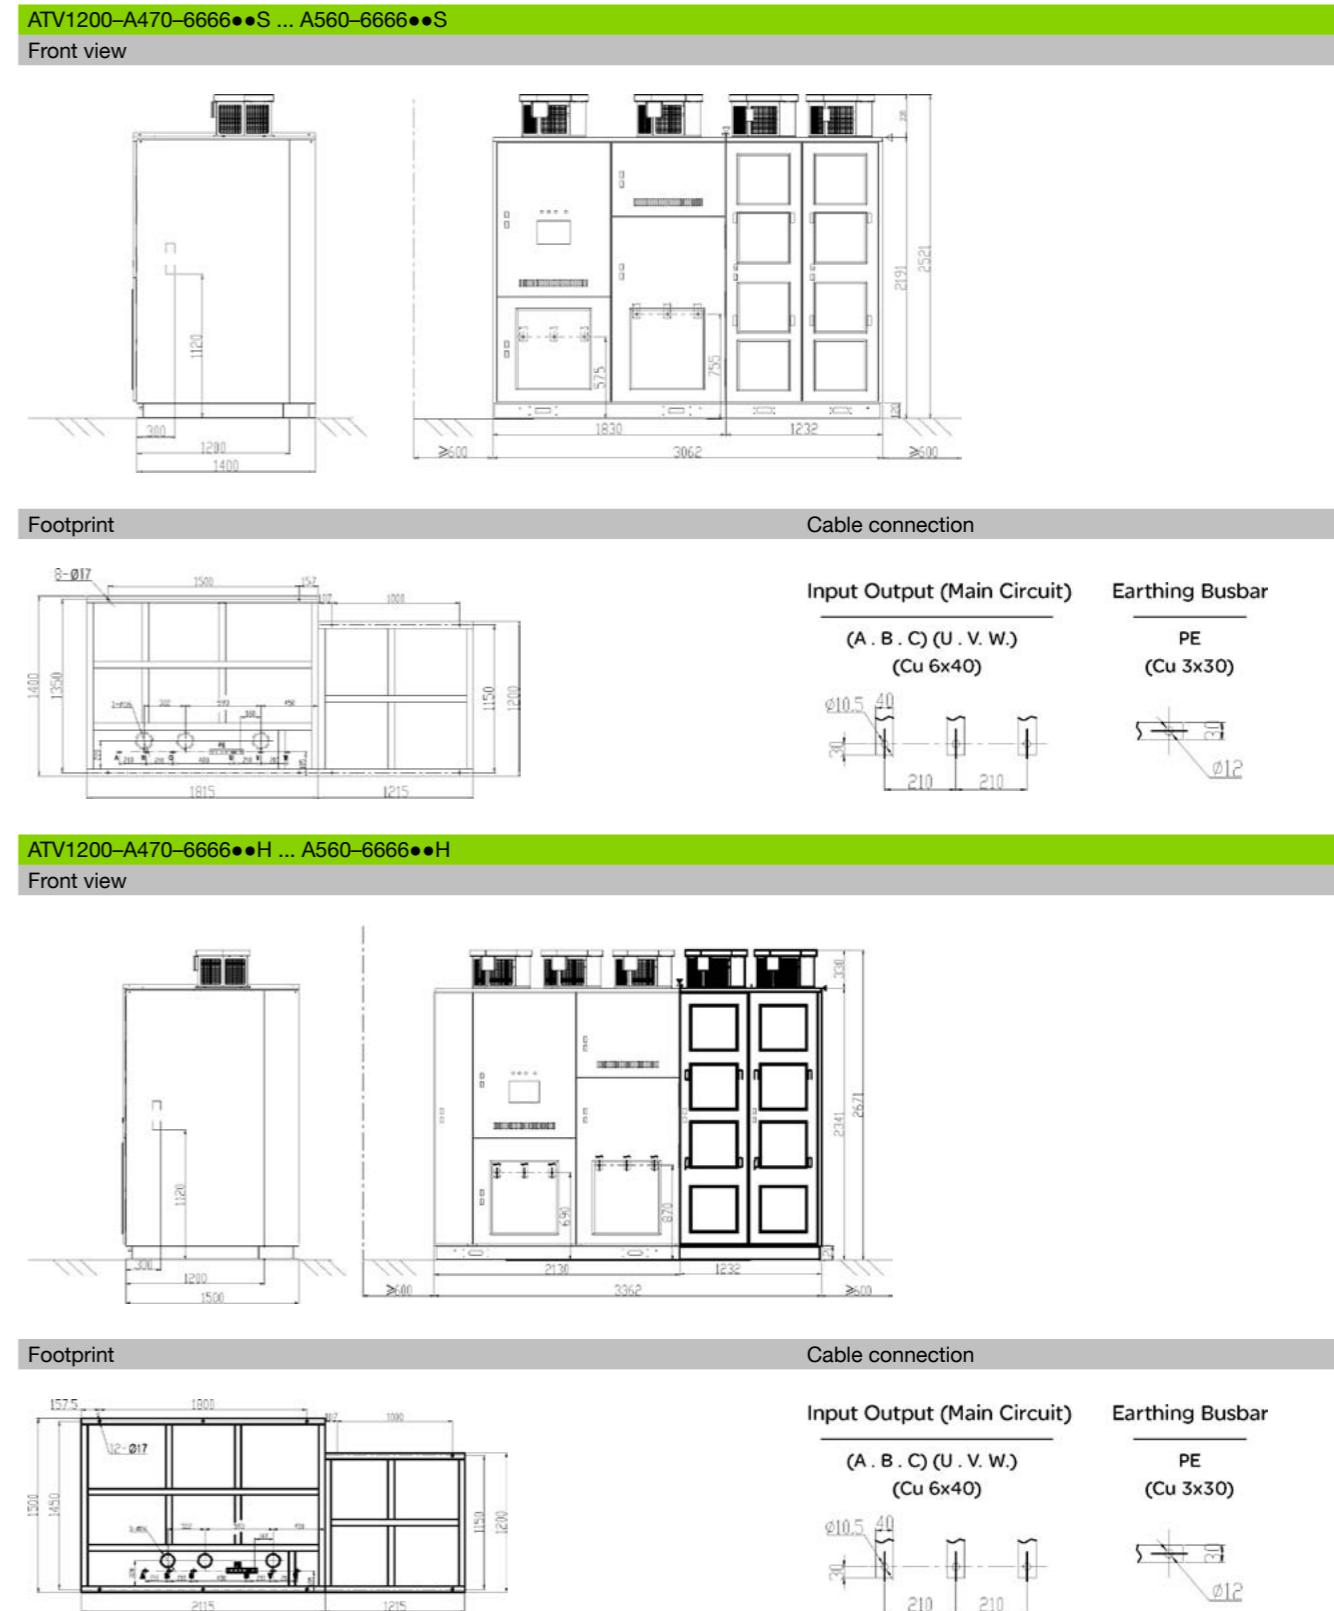

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV


| Technical data for output voltage 6.6 kV | | | |
|--|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A750-6666••• | A860-6666••• | A940-6666••• |
| Nominal data | | | |
| Type rating [kVA] | 750 | 860 | 940 |
| Motor power [kW] | 627 | 719 | 786 |
| Continuous output current [A] | | | |
| With 120 % overload | 65 | 75 | 82 |
| With 150 % overload | 52 | 60 | 66 |
| Max. output current [A] | | | |
| 1 min/10 min | 79 | 90 | 99 |
| Power cells | | | |
| Number of cells per phase | 6 | 6 | 6 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 25 (incl. fan power) | ≤ 29 (incl. fan power) | ≤ 31 (incl. fan power) |
| High efficiency | ≤ 22 (incl. fan power) | ≤ 25 (incl. fan power) | ≤ 28 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 13200 | 13200 | 13200 |
| High efficiency | 19800 | 19800 | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 3500 | 3600 | 3800 |
| High efficiency | 4500 | 4600 | 4800 |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 3060x1400x2520 | 3060x1400x2520 | 3060x1400x2520 |
| High efficiency | 3660x1500x2670 | 3660x1500x2670 | 3660x1500x2670 |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

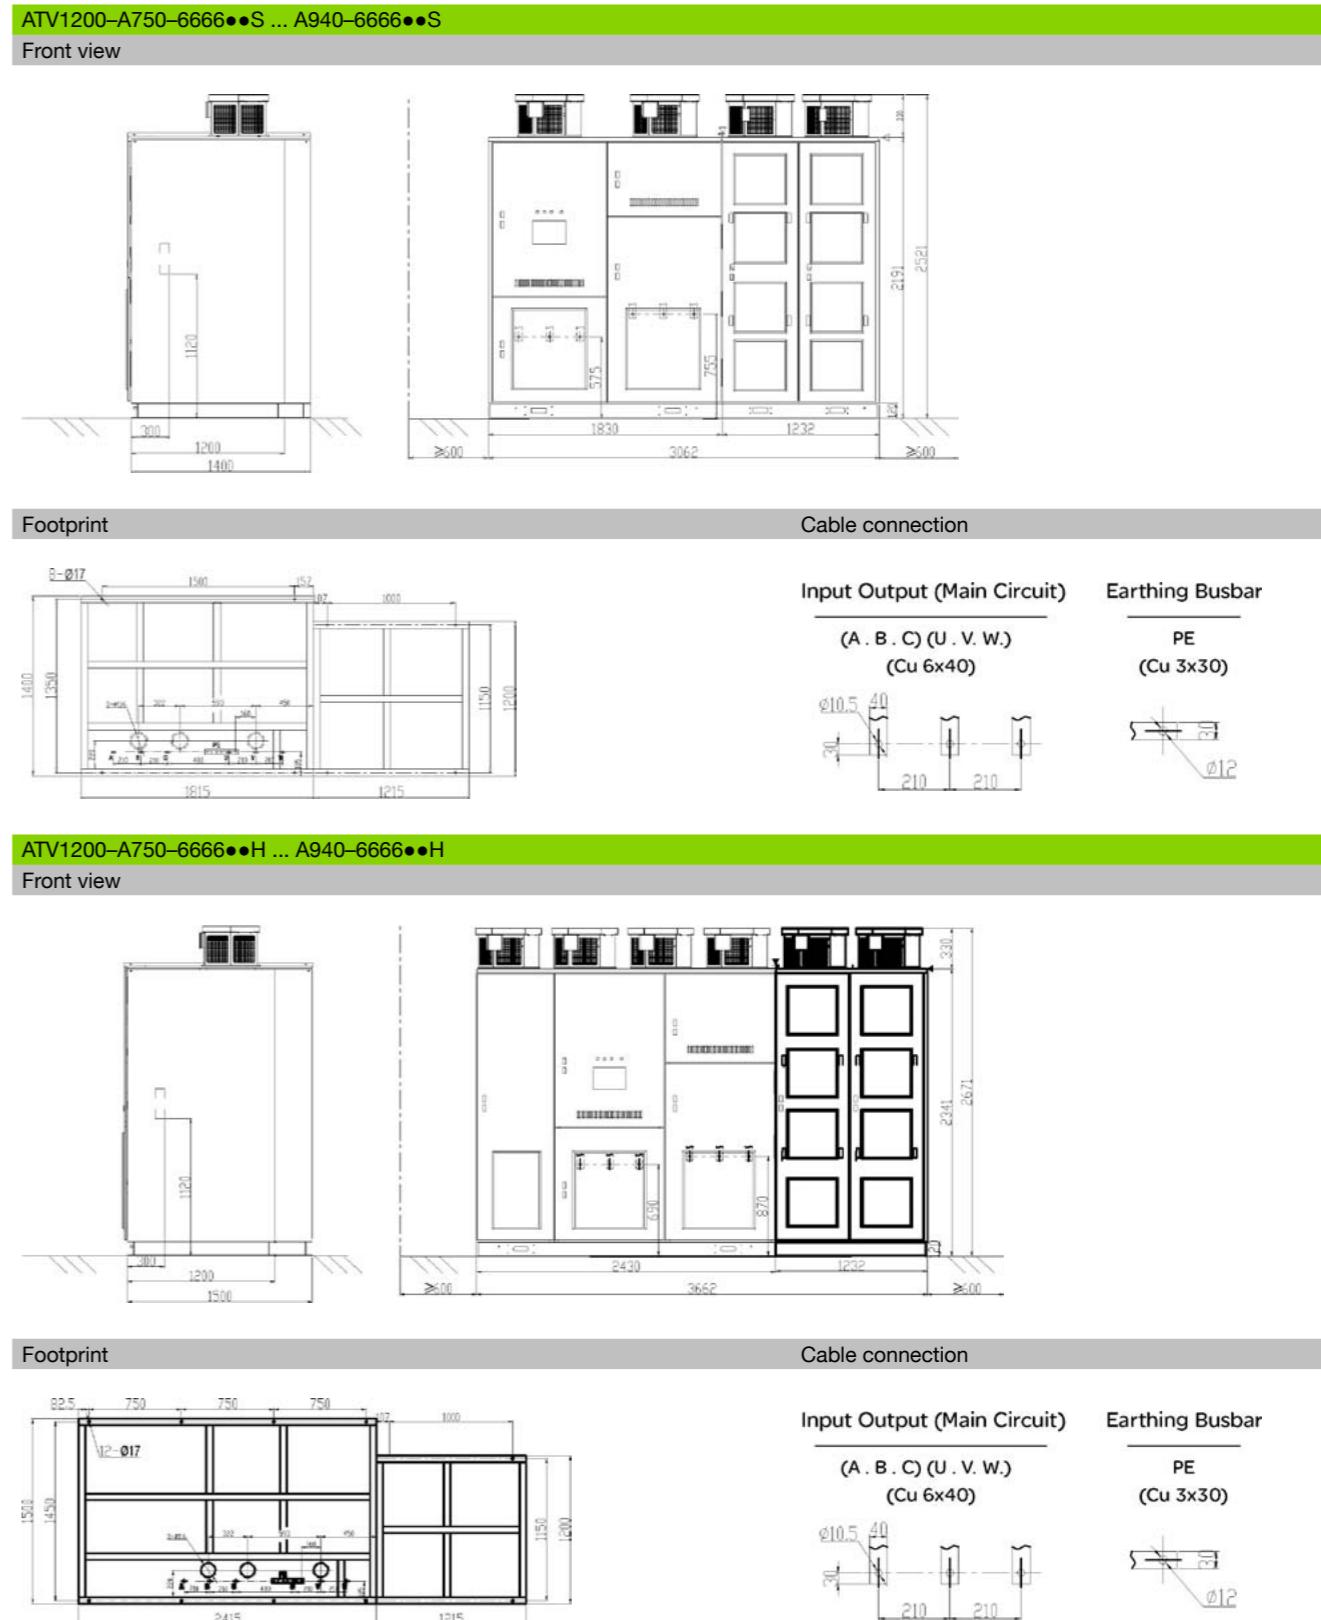

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1070-6666••• | A1150-6666••• |
| Nominal data | | |
| Type rating [kVA] | 1070 | 1150 |
| Motor power [kW] | 895 | 961 |
| Continuous output current [A] | | |
| With 120 % overload | 94 | 100 |
| With 150 % overload | 75 | 80 |
| Max. output current [A] | | |
| 1 min/10 min | 112 | 120 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 36 (incl. fan power) | ≤ 38 (incl. fan power) |
| High efficiency | ≤ 31 (incl. fan power) | ≤ 34 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 4100 | 4200 |
| High efficiency | 5100 | 5200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3360x1400x2520 | 3360x1400x2520 |
| High efficiency | 3660x1600x2670 | 3660x1600x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A1070-6666••S ... A1150-6666••S



Front view

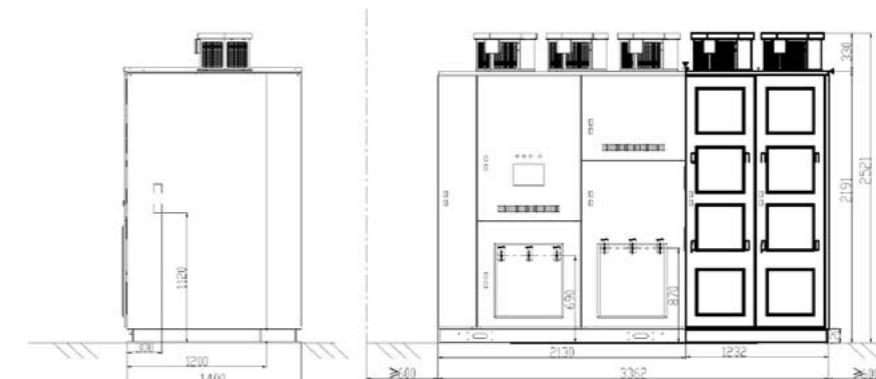

Footprint

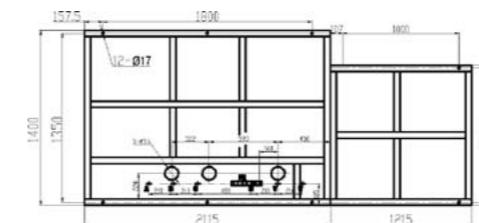


Cable connection




ATV1200-A1070-6666••H ... A1150-6666••H



Front view

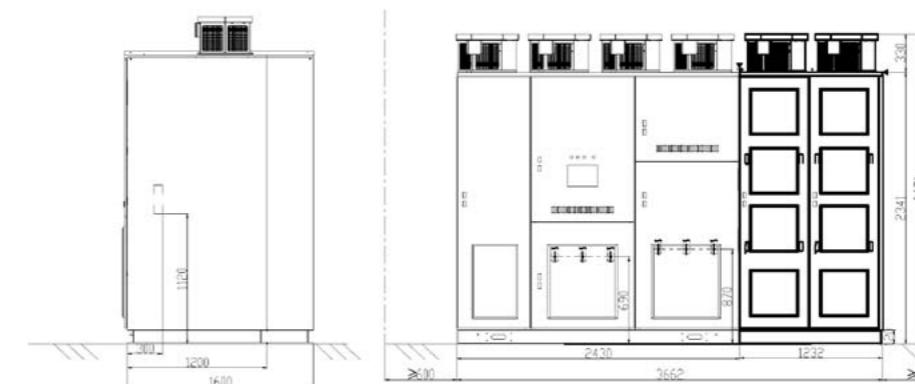

Footprint

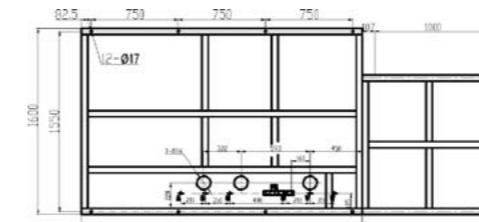

Cable connection



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1250-6666••• | A1550-6666••• |
| Nominal data | | |
| Type rating [kVA] | 1250 | 1550 |
| Motor power [kW] | 1045 | 1296 |
| Continuous output current [A] | | |
| With 120 % overload | 109 | 135 |
| With 150 % overload | 87 | 108 |
| Max. output current [A] | | |
| 1 min/10 min | 131 | 162 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 42 (incl. fan power) | ≤ 52 (incl. fan power) |
| High efficiency | ≤ 37 (incl. fan power) | ≤ 45 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 16500 | 16500 |
| High efficiency | 19800 | 19800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 5000 | 5500 |
| High efficiency | 5900 | 6200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 3960x1500x2670 | 3960x1500x2670 |
| High efficiency | 4260x1600x2670 | 4260x1600x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A1250-6666••S ... A1550-6666••S


Front view

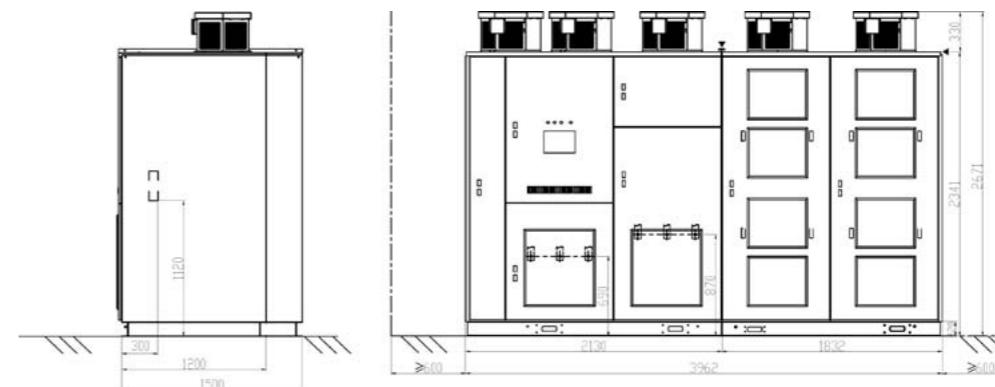


Footprint

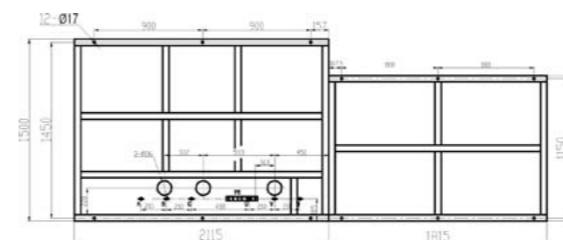


Cable connection

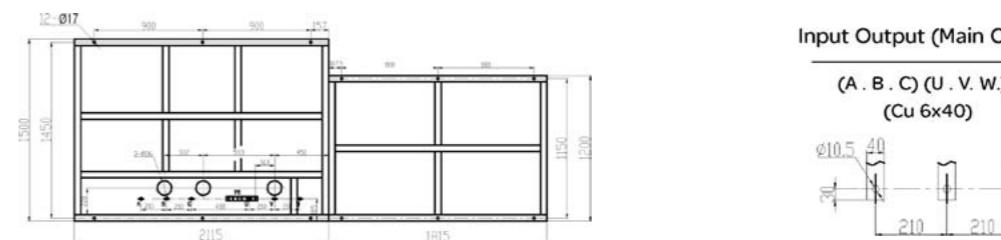

Input Output (Main Circuit)




Earthing Busbar




ATV1200-A1250-6666••H ... A1550-6666••H


Front view

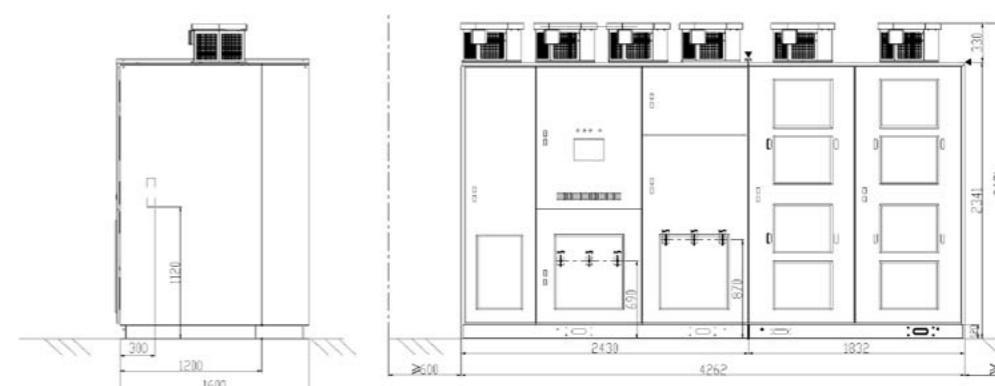


Footprint

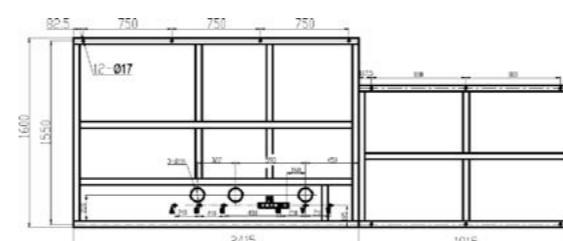


Cable connection

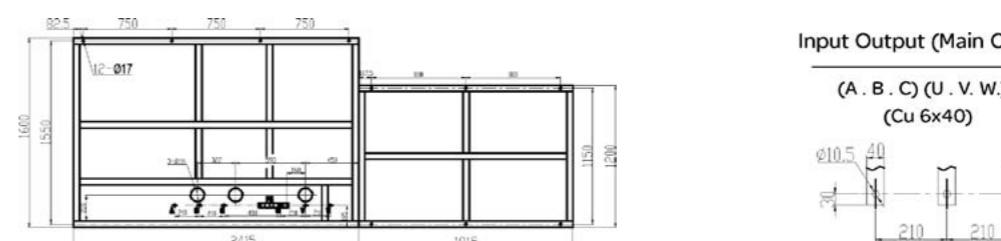

Input Output (Main Circuit)



Earthing Busbar



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

| Technical data for output voltage 6.6 kV | |
|--|-----------------------------|
| ATV1200 | A1715-6666••• |
| Nominal data | |
| Type rating [kVA] | 1715 |
| Motor power [kW] | 1434 |
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 57 (incl. fan power) |
| High efficiency | ≤ 50 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 29900 |
| High efficiency | 33200 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 5800 |
| High efficiency | 6500 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 3960x1500x2740 |
| High efficiency | 4260x1600x2740 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2060-6666••• | A2290-6666••• |
| Nominal data | | |
| Type rating [kVA] | 2060 | 2290 |
| Motor power [kW] | 1722 | 1914 |
| Continuous output current [A] | | |
| With 120 % overload | 180 | 200 |
| With 150 % overload | 144 | 160 |
| Max. output current [A] | | |
| 1 min/10 min | 216 | 240 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 69 (incl. fan power) | ≤ 77 (incl. fan power) |
| High efficiency | ≤ 60 (incl. fan power) | ≤ 67 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 23100 | 23100 |
| High efficiency | 23100 | 23100 |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 7200 | 7500 |
| High efficiency | 7900 | 8200 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1600x2670 | 5170x1600x2670 |
| High efficiency | 5470x1700x2670 | 5470x1700x2670 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A2060-6666••S ... A2290-6666••S



Front view

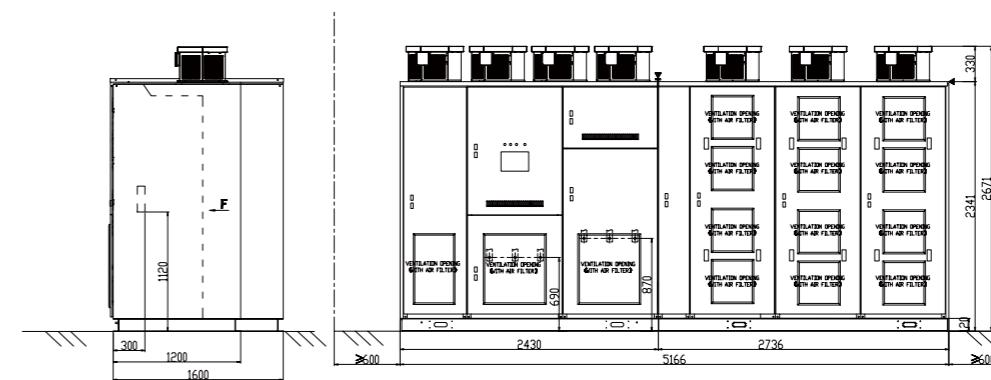

Footprint

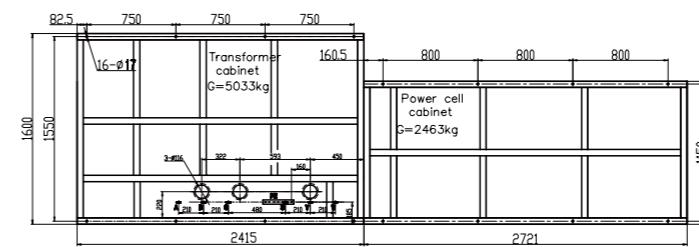


Cable connection

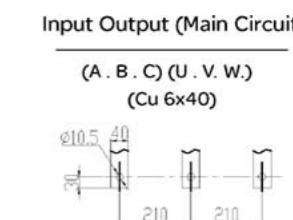


ATV1200-A2060-6666••H ... A2290-6666••H



Front view

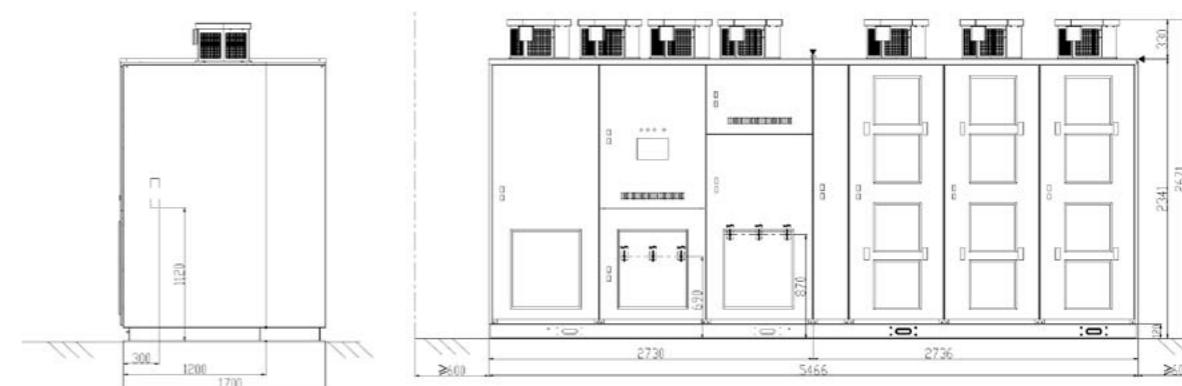

Footprint

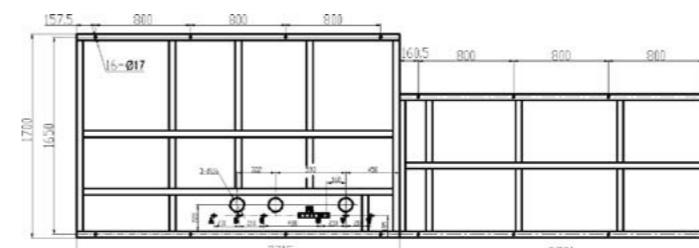

Cable connection

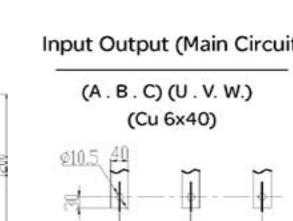

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

ATV1200 | A2515-6666•••

Nominal data

Type rating [kVA]

2515

Motor power [kW]

2103

Continuous output current [A]

With 120 % overload

220

With 150 % overload

176

Max. output current [A]

1 min/10 min

264

Power cells

Number of cells per phase

6

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 84
(incl. fan power)

High efficiency

≤ 74
(incl. fan power)

Air flow [m³/h]

Standard efficiency

23100

High efficiency

23100

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

7800

High efficiency

8800

Dimension[mm] W*D*H

Standard efficiency

5170x1700x2670

High efficiency

5470x1700x2670

Connection

Incoming cable

Type

standard symmetrical

see drawing

Motor cable

Type

3 core

Max. size

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A2515-6666••S


Front view

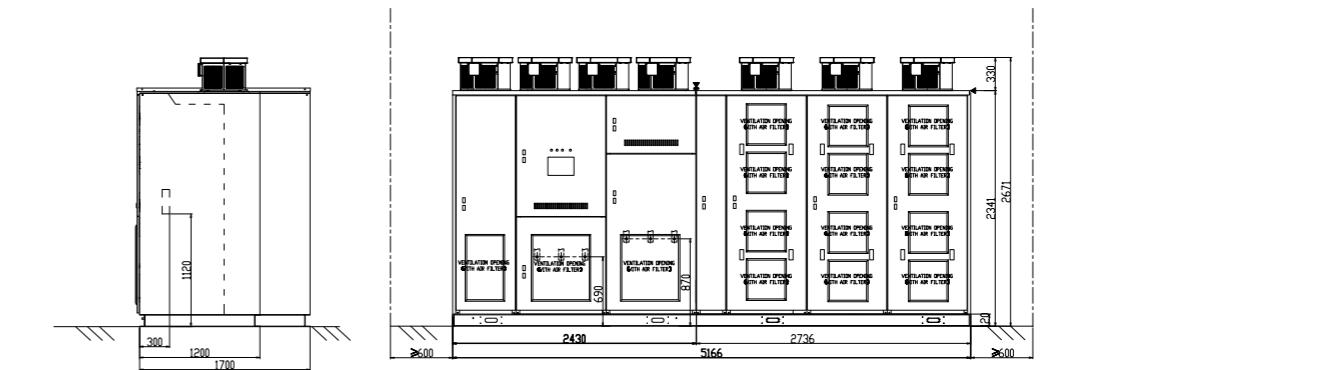

Footprint

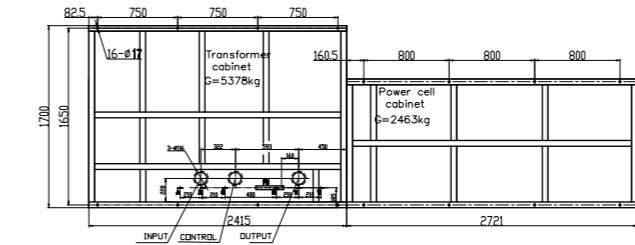


Cable connection

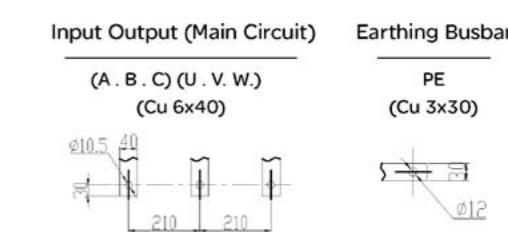


ATV1200-A2515-6666••H


Front view

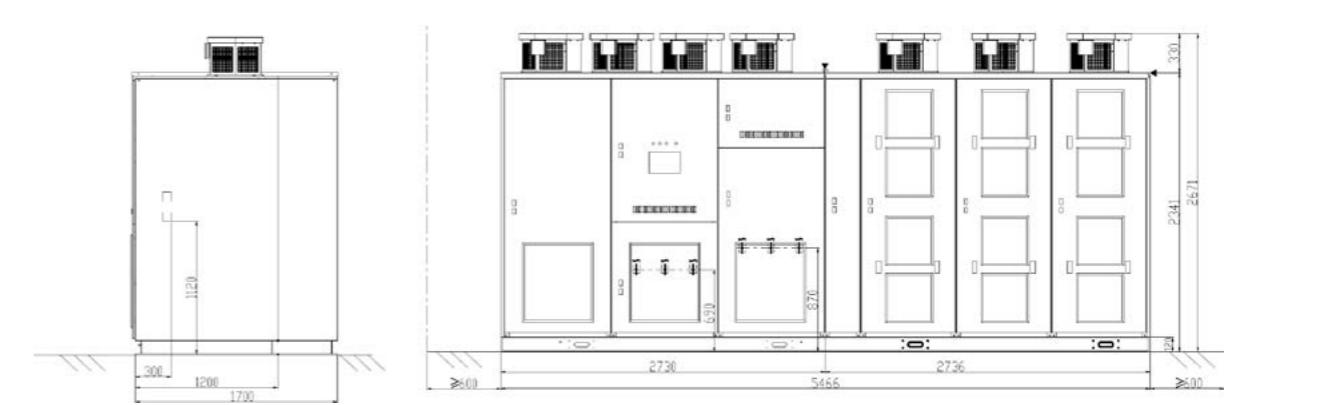

Footprint

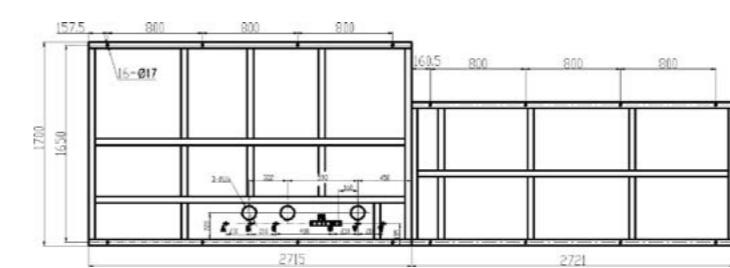

Cable connection

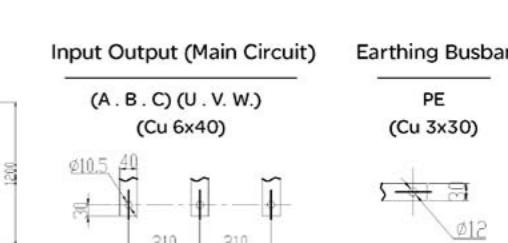

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

| Technical data for output voltage 6.6 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A2800-6666••• | A3200-6666••• |
| Nominal data | | |
| Type rating [kVA] | 2800 | 3200 |
| Motor power [kW] | 2341 | 2675 |
| Continuous output current [A] | | |
| With 120 % overload | 245 | 280 |
| With 150 % overload | 196 | 224 |
| Max. output current [A] | | |
| 1 min/10 min | 294 | 336 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 94 (incl. fan power) | ≤ 107 (incl. fan power) |
| High efficiency | ≤ 82 (incl. fan power) | ≤ 94 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 43200 | 43200 |
| High efficiency | 43200 | 43200 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 8300 | 8700 |
| High efficiency | 9100 | 9600 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5170x1700x2740 | 5170x1700x2740 |
| High efficiency | 5470x1700x2740 | 5470x1700x2740 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A3660-6666••• | A3940-6666••• |
| Nominal data | | |
| Type rating [kVA] | | |
| | 3660 | 3940 |
| Motor power [kW] | 3060 | 3294 |
| Continuous output current [A] | | |
| With 120 % overload | 320 | 345 |
| With 150 % overload | 256 | 276 |
| Max. output current [A] | | |
| 1 min/10 min | 384 | 414 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 122 (incl. fan power) | ≤ 132 (incl. fan power) |
| High efficiency | ≤ 107 (incl. fan power) | ≤ 115 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 33000 | 33000 |
| High efficiency | 33000 | 33000 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 11200 | 11800 |
| High efficiency | 11800 | 12400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6670x1700x2670 | 6670x1700x2670 |
| High efficiency | 6670x1700x2970 | 6670x1700x2970 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A3660-6666••S ... A3940-6666••S



Front view

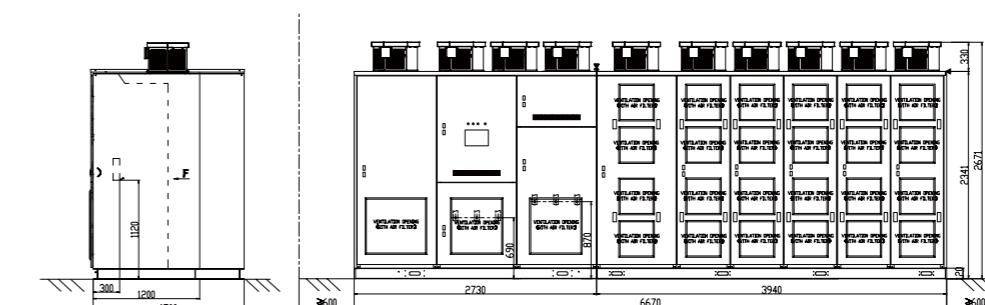

Footprint

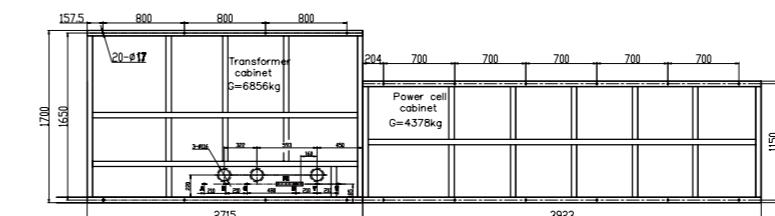

Cable connection

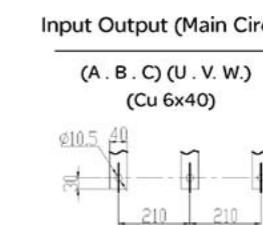


ATV1200-A3660-6666••H ... A3940-6666••H



Front view



Footprint

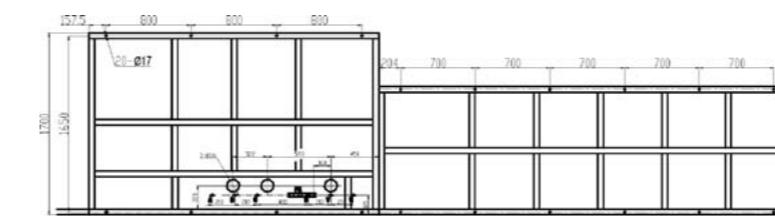

Cable connection

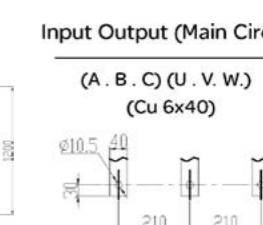

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A4440-6666••• | A4685-6666••• |
| Nominal data | | |
| Type rating [kVA] | 4440 | 4685 |
| Motor power [kW] | 3712 | 3917 |
| Continuous output current [A] | | |
| With 120 % overload | 388 | 410 |
| With 150 % overload | 311 | 328 |
| Max. output current [A] | | |
| 1 min/10 min | 466 | 492 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 148 (incl. fan power) | ≤ 157 (incl. fan power) |
| High efficiency | ≤ 130 (incl. fan power) | ≤ 137 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 49800 | 49800 |
| High efficiency | 49800 | 49800 |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 12400 | 12400 |
| High efficiency | 13100 | 13400 |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 6670x1700x2740 | 6670x1700x2740 |
| High efficiency | 6970x1800x3040 | 6970x1800x3040 |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A4440-6666••S ... A4685-6666••S


Front view

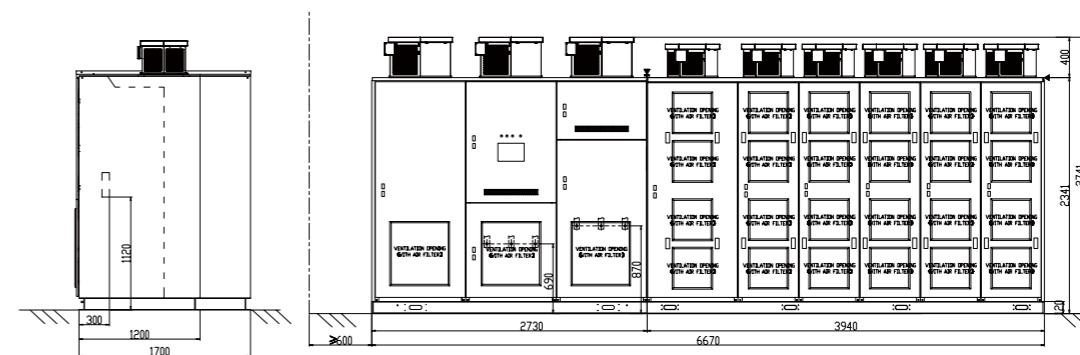

Footprint

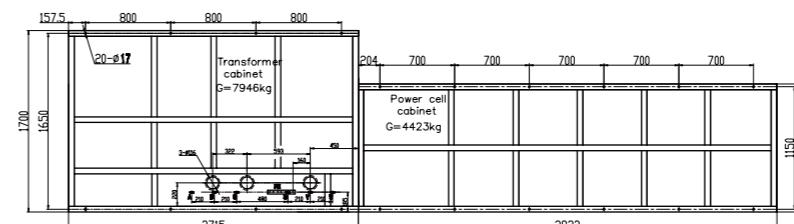


Cable connection

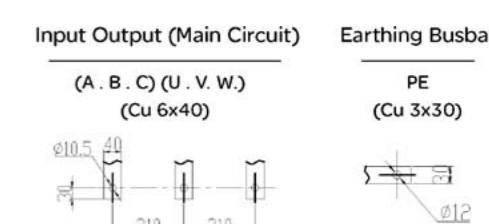

Input Output (Main Circuit)

Earthing Busbar

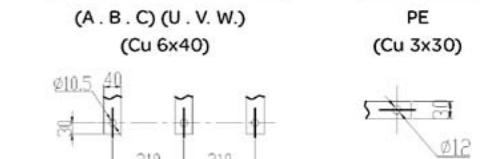


ATV1200-A4440-6666••H ... A4685-6666••H


Front view



Footprint

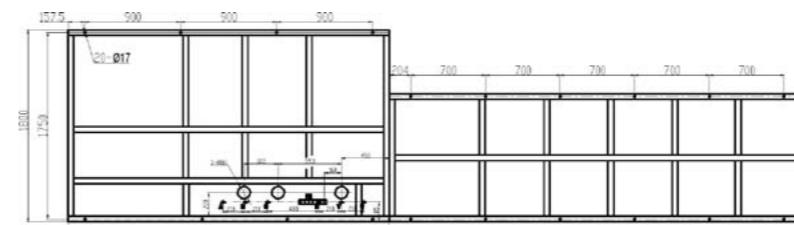


Cable connection

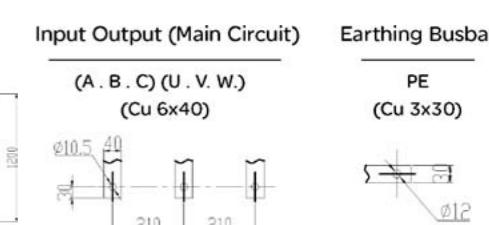

Input Output (Main Circuit)

Earthing Busbar

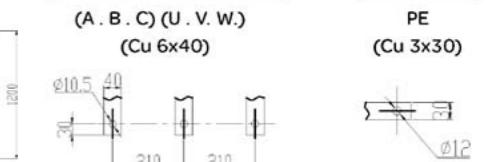

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

ATV1200 | A5000-6666•••

Nominal data

Type rating [kVA]

5000

Motor power [kW]

4180

Continuous output current [A]

With 120 % overload

437

With 150 % overload

350

Max. output current [A]

1 min/10 min

525

Power cells

Number of cells per phase

6

Characteristics

Efficiency (incl. transformer) [%]

Standard efficiency

≥ 96.1
(incl. fan power)

High efficiency

≥ 96.5
(incl. fan power)

Total losses at 100% load [kW]

Standard efficiency

≤ 163
(incl. fan power)

High efficiency

≤ 146
(incl. fan power)

Air flow [m³/h]

Standard efficiency

49800

High efficiency

49800

Sound pressure level [dB(A)]

≤ 80

Weight [kg]

Standard efficiency

13300

High efficiency

13600

Dimension[mm] W*D*H

Standard efficiency

6670x1800x2740

High efficiency

6970x1800x3040

Connection

Incoming cable

Type standard symmetrical

see drawing

Motor cable

Type 3 core

see drawing

Max. length (without filter)

2000 m

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A5000-6666••S

Front view

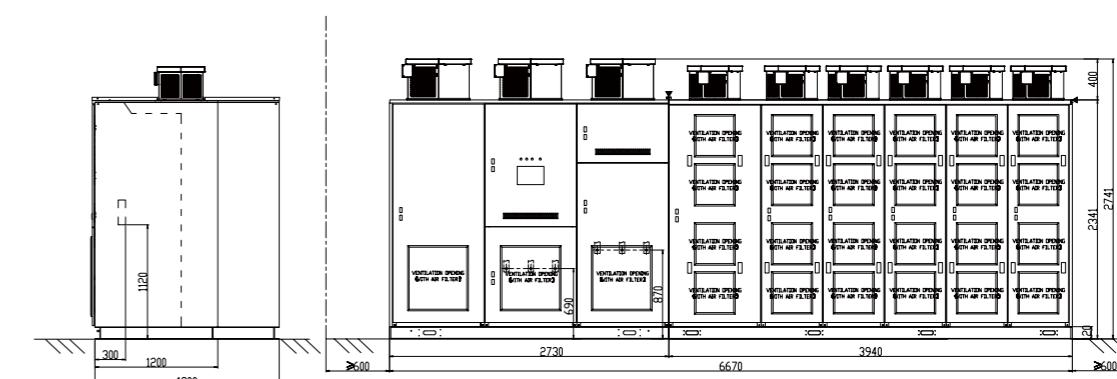


Footprint

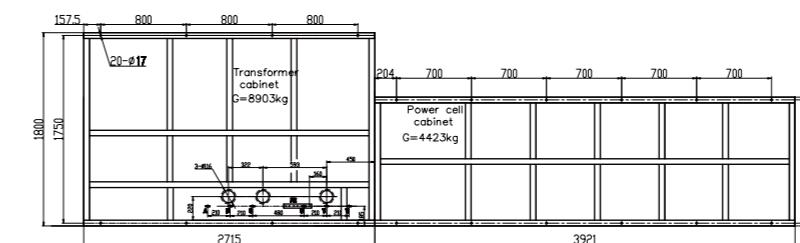

Cable connection


Input Output (Main Circuit)

(A . B . C) (U . V . W)
(Cu 6x40)

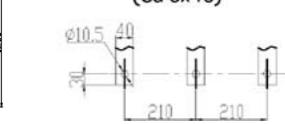


Earthing Busbar

PE
(Cu 3x30)




ATV1200-A5000-6666••H

Front view

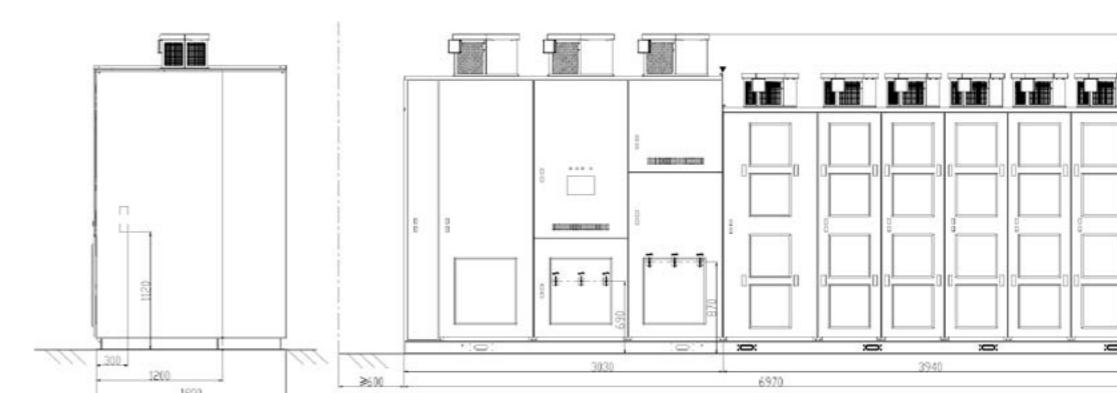


Footprint

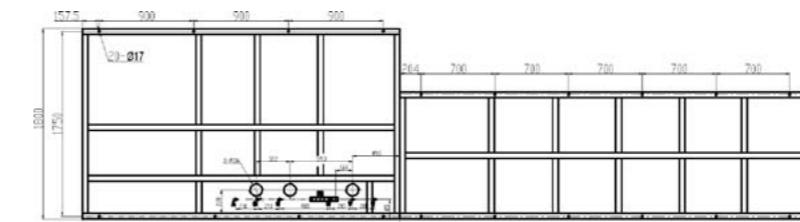

Cable connection


Input Output (Main Circuit)

(A . B . C) (U . V . W)
(Cu 6x40)

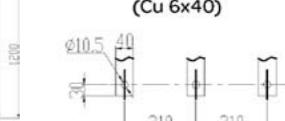

Earthing Busbar

PE
(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

| Technical data for output voltage 6.6 kV | |
|--|-----------------------------|
| ATV1200 | A5600-6666••• |
| Nominal data | |
| Type rating [kVA] | 5600 |
| Motor power [kW] | 4682 |
| Continuous output current [A] | |
| With 120 % overload | 490 |
| With 150 % overload | 392 |
| Max. output current [A] | |
| 1 min/10 min | 588 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.2 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 178 (incl. fan power) |
| High efficiency | ≤ 164 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 80000 |
| High efficiency | 80000 |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 13800 |
| High efficiency | 14000 |
| Dimension[mm] W*D*H | |
| Standard efficiency | 6670x1800x2820 |
| High efficiency | 6970x1800x3040 |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV


| Technical data for output voltage 6.6 kV | |
|--|-----------------------------|
| ATV1200 | A6300-6666••• |
| Nominal data | |
| Type rating [kVA] | 6300 |
| Motor power [kW] | 5267 |
| Continuous output current [A] | |
| With 120 % overload | 550 |
| With 150 % overload | 440 |
| Max. output current [A] | |
| 1 min/10 min | 660 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.3 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 195 (incl. fan power) |
| High efficiency | ≤ 184 (incl. fan power) |
| Air flow [m³/h] | |
| Standard efficiency | 90000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 16700 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 8570x1800x3040 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

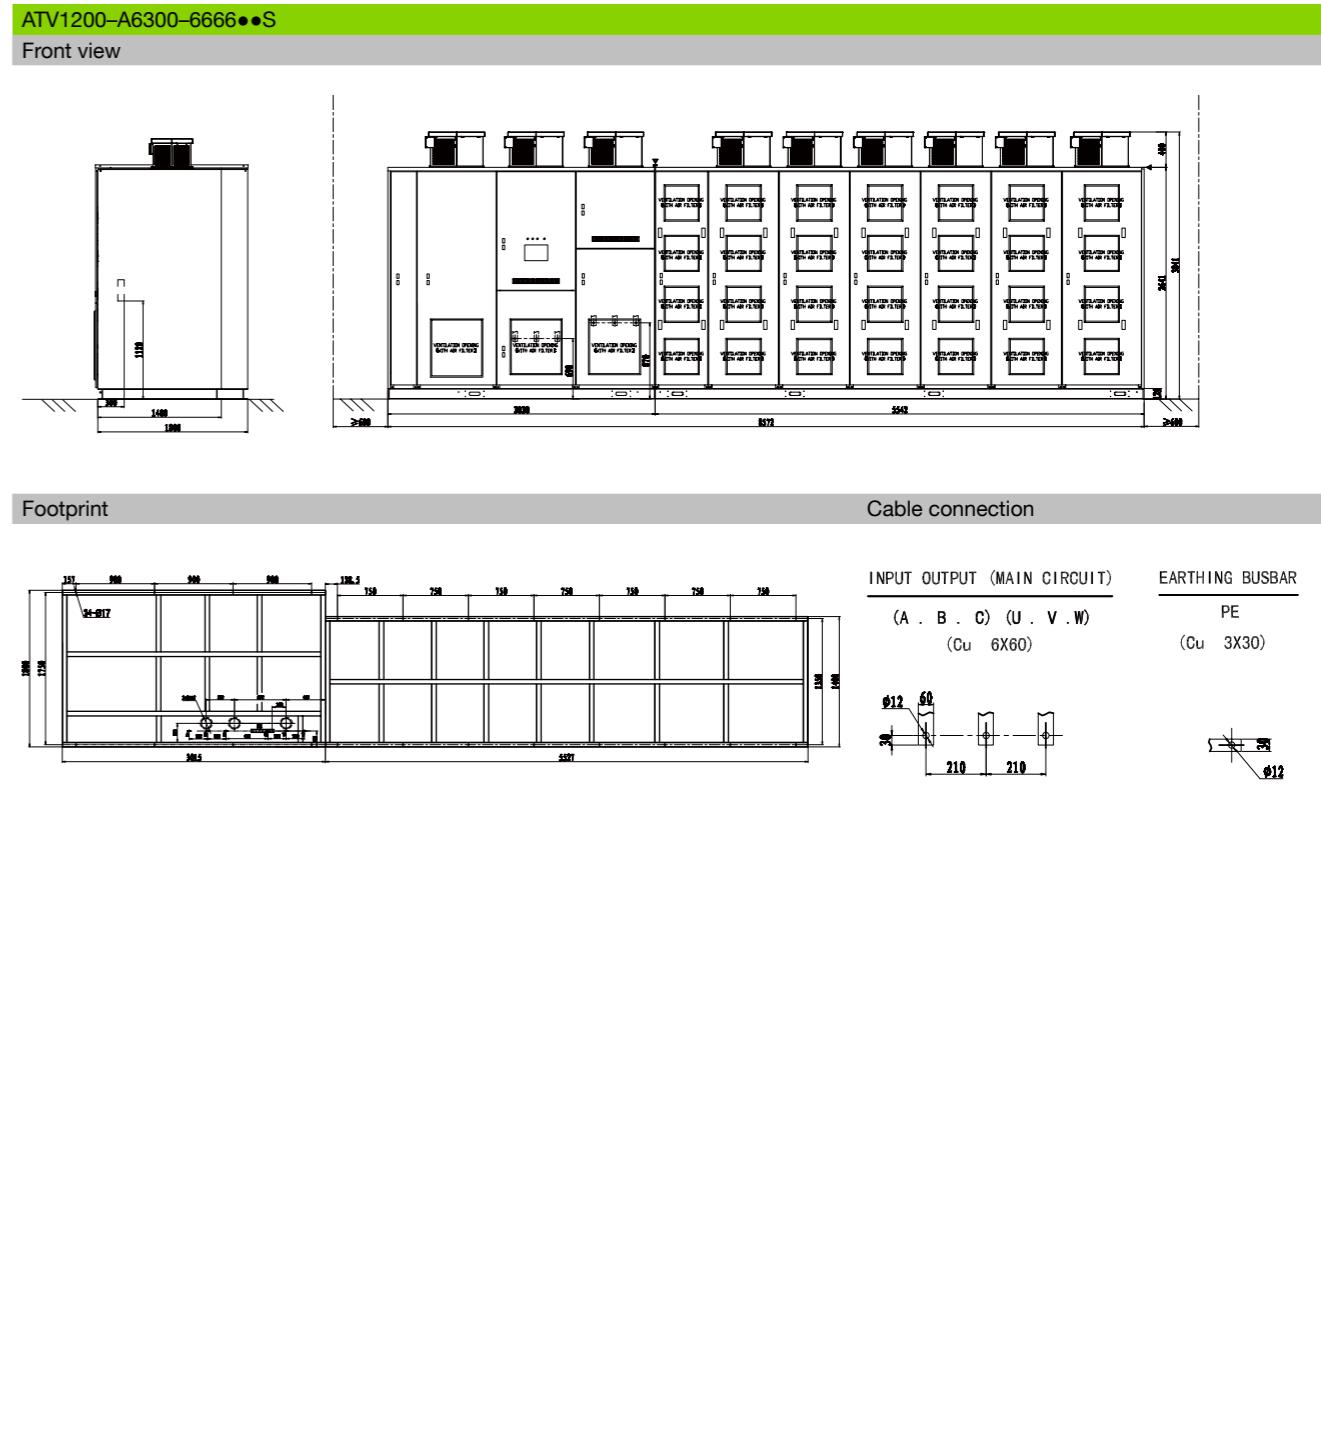

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

Technical data for output voltage 6.6 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A7000-6666••• | A7550-6666••• |
| Nominal data | | |
| Type rating [kVA] | 7000 | 7550 |
| Motor power [kW] | 5852 | 6312 |
| Continuous output current [A] | | |
| With 120 % overload | 612 | 660 |
| With 150 % overload | 490 | 528 |
| Max. output current [A] | | |
| 1 min/10 min | 735 | 793 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 205 (incl. fan power) | ≤ 221 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 90000 | 90000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 18300 | 19000 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 9470x1600x3040 | 9470x1600x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 6.6 kV

ATV1200-A7000-6666••S ... A7550-6666••S


Front view

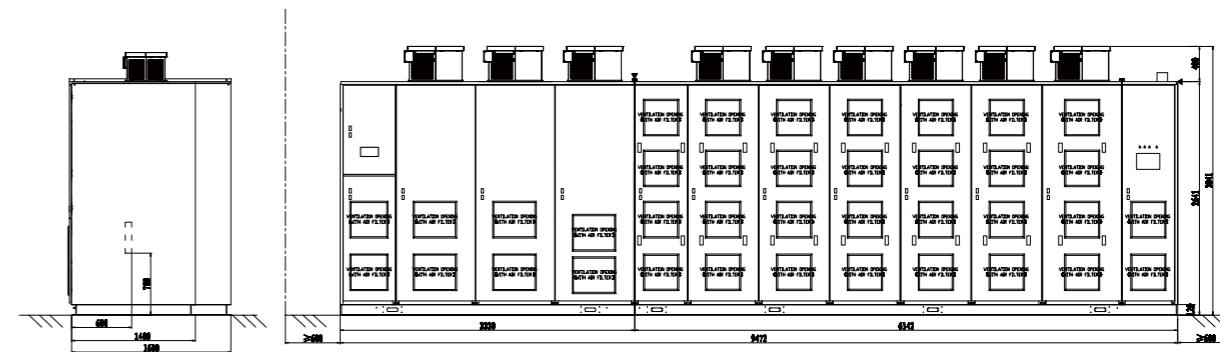

Footprint

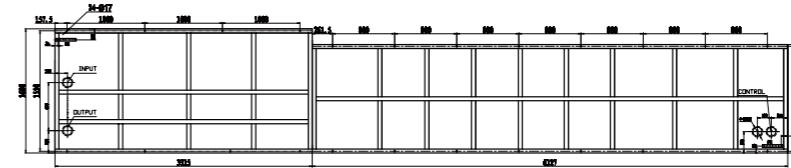

Cable connection

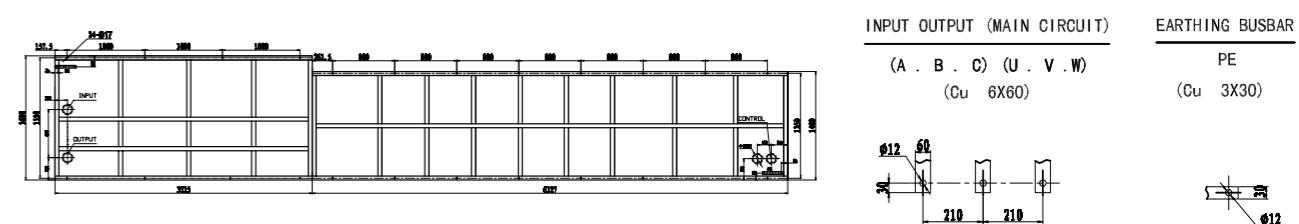

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV


| Technical data for output voltage 6.6 kV | | |
|--|-----------------------------|-----------------------------|
| ATV1200 | A8250-6666••• | A8950-6666••• |
| Nominal data | | |
| Type rating [kVA] | 8250 | 8950 |
| Motor power [kW] | 6897 | 7482 |
| Continuous output current [A] | | |
| With 120 % overload | 720 | 783 |
| With 150 % overload | 576 | 626 |
| Max. output current [A] | | |
| 1 min/10 min | 864 | 940 |
| Power cells | | |
| Number of cells per phase | 6 | 6 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 228 (incl. fan power) | ≤ 239 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 100000 | 100000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 20800 | 21400 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 9770x1700x3040 | 9770x1700x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

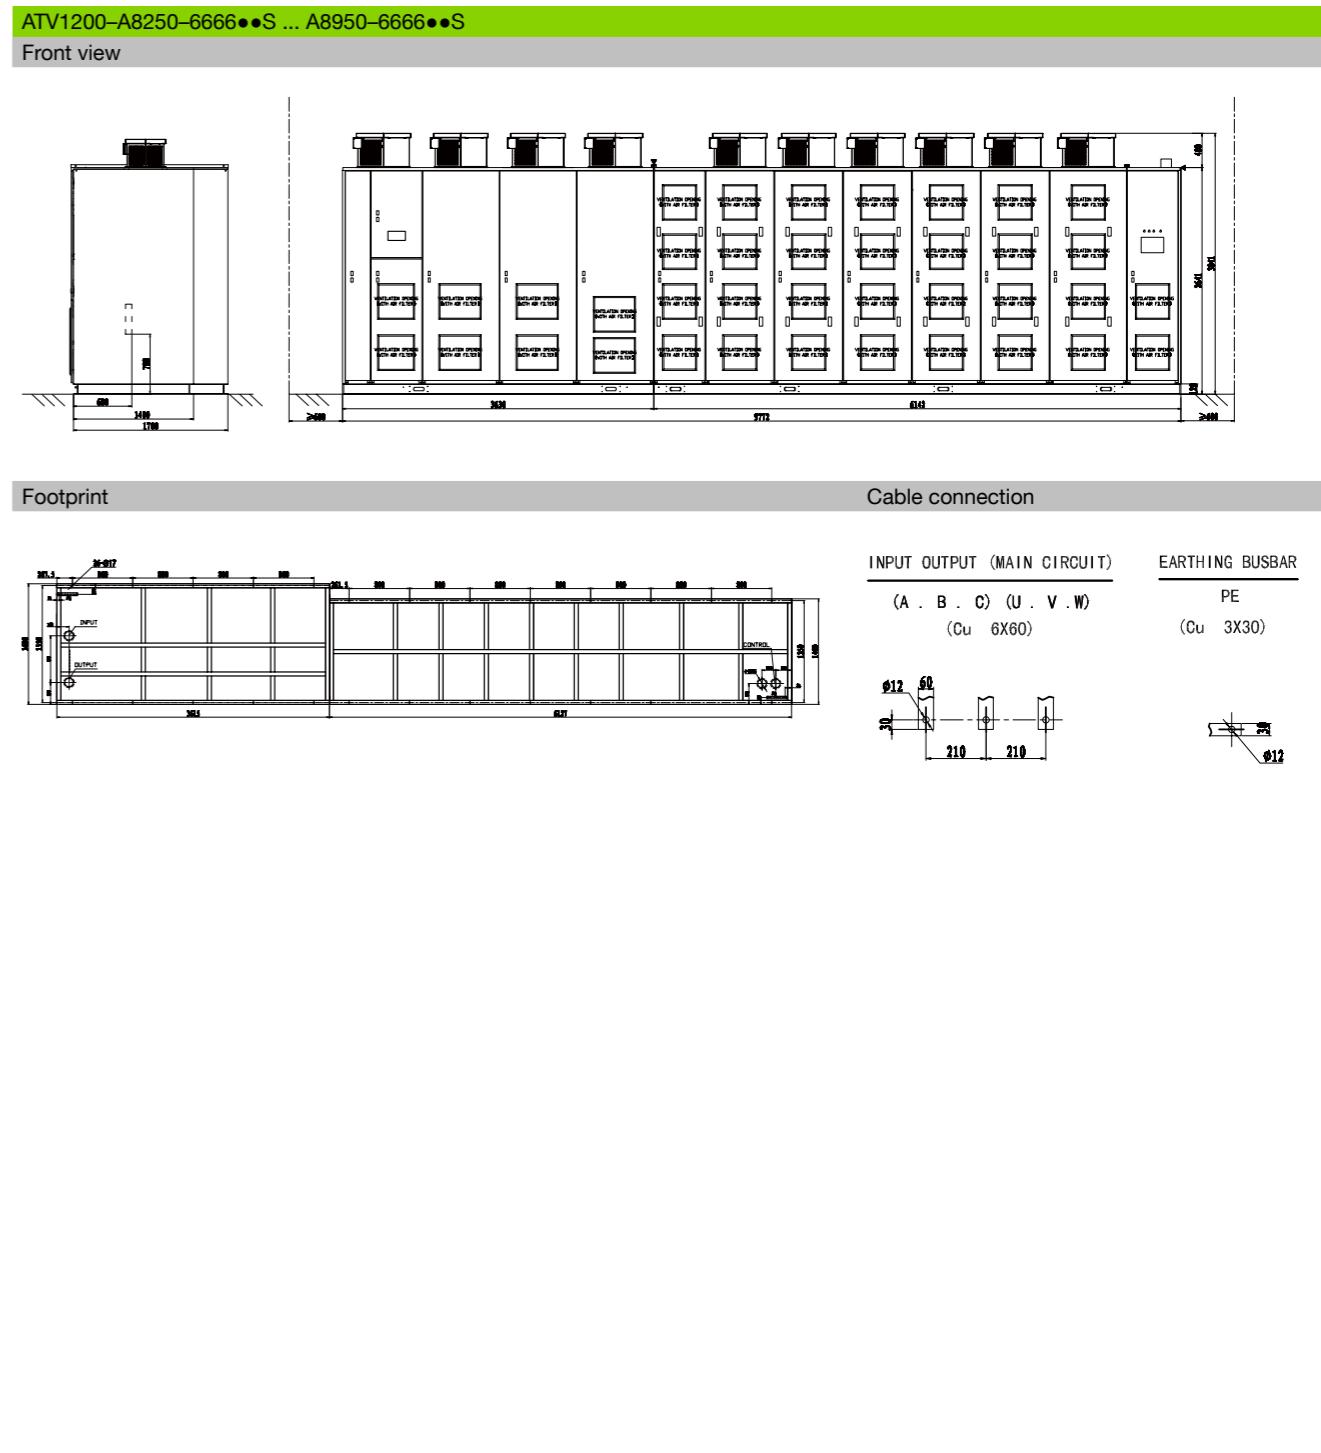

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV


| Technical data for output voltage 6.6 kV | |
|--|-----------------------------|
| ATV1200 | A9750-6666••• |
| Nominal data | |
| Type rating [kVA] | 9750 |
| Motor power [kW] | 8151 |
| Continuous output current [A] | |
| With 120 % overload | 850 |
| With 150 % overload | 680 |
| Max. output current [A] | |
| 1 min/10 min | 1020 |
| Power cells | |
| Number of cells per phase | 6 |
| Characteristics | |
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96.9 (incl. fan power) |
| High efficiency | |
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 253 (incl. fan power) |
| High efficiency | |
| Air flow [m³/h] | |
| Standard efficiency | 100000 |
| High efficiency | |
| Sound pressure level [dB(A)] | |
| | ≤ 80 |
| Weight [kg] | |
| Standard efficiency | 22300 |
| High efficiency | |
| Dimension[mm] W*D*H | |
| Standard efficiency | 9770x1700x3340 |
| High efficiency | |
| Connection | |
| Incoming cable | |
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 6.6 kV

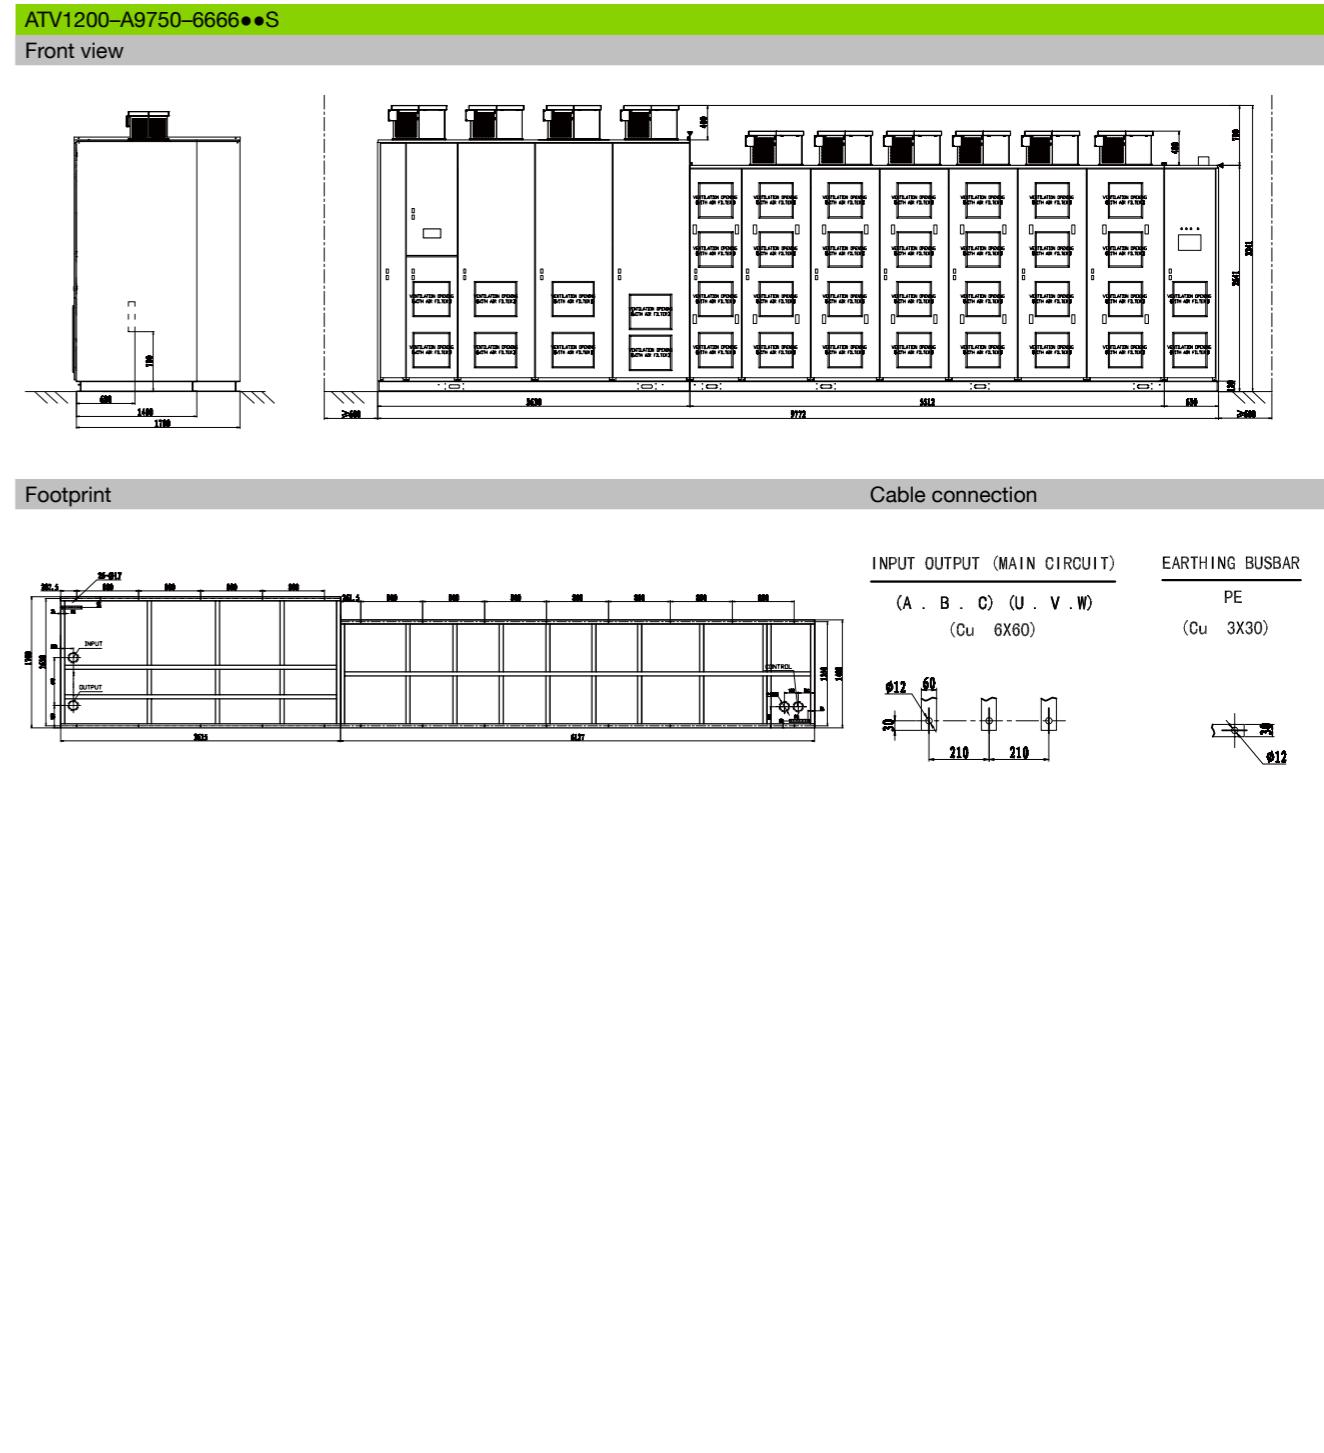

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

| Technical data for output voltage 10 kV | | | | |
|---|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A470-1010••• | A610-1010••• | A700-1010••• | A790-1010••• |
| Nominal data | | | | |
| Type rating [kVA] | | | | |
| 470 | 610 | 700 | 790 | |
| Motor power [kW] | | | | |
| 393 | 510 | 585 | 660 | |
| Continuous output current [A] | | | | |
| With 120 % overload | 27 | 35 | 40 | 46 |
| With 150 % overload | 22 | 28 | 32 | 36 |
| Max. output current [A] | | | | |
| 1 min/10 min | 33 | 42 | 48 | 55 |
| Power cells | | | | |
| Number of cells per phase | | | | |
| | 8 | 8 | 8 | 8 |
| Characteristics | | | | |
| Efficiency (incl. transformer) [%] | | | | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | | |
| Standard efficiency | ≤ 16 (incl. fan power) | ≤ 20 (incl. fan power) | ≤ 23 (incl. fan power) | ≤ 26 (incl. fan power) |
| High efficiency | ≤ 14 (incl. fan power) | ≤ 18 (incl. fan power) | ≤ 20 (incl. fan power) | ≤ 23 (incl. fan power) |
| Air flow [m³/h] | | | | |
| Standard efficiency | 19800 | 19800 | 19800 | 19800 |
| High efficiency | | | | |
| Sound pressure level [dB(A)] | | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | | |
| Standard efficiency | 4100 | 4300 | 4400 | 4500 |
| High efficiency | | | | |
| Dimension[mm] W*D*H | | | | |
| Standard efficiency | 3960x1600x2670 | 3960x1600x2670 | 3960x1600x2670 | 3960x1600x2670 |
| High efficiency | | | | |
| Connection | | | | |
| Incoming cable | | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing | see drawing |
| Motor cable | | | | |
| Type | 3 core | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 10 kV

ATV1200-A470-1010••S ... A790-1010••S



Front view

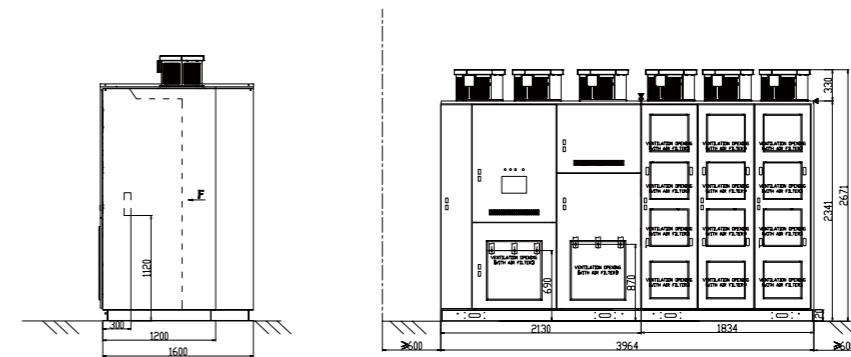

Footprint

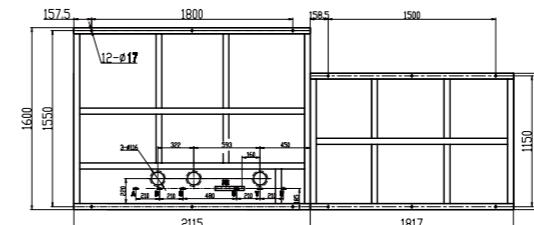

Cable connection

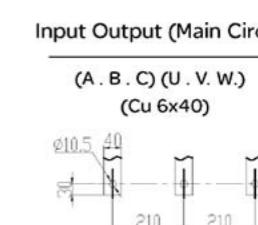

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A940-1010••• | A1070-1010••• | A1130-1010••• |
| Nominal data | | | |
| Type rating [kVA] | | | |
| | 940 | 1070 | 1130 |
| Motor power [kW] | | | |
| | 786 | 895 | 945 |
| Continuous output current [A] | | | |
| With 120 % overload | 54 | 62 | 65 |
| With 150 % overload | 43 | 49 | 52 |
| Max. output current [A] | | | |
| 1 min/10 min | 65 | 74 | 78 |
| Power cells | | | |
| Number of cells per phase | | | |
| | 8 | 8 | 8 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 31 (incl. fan power) | ≤ 36 (incl. fan power) | ≤ 38 (incl. fan power) |
| High efficiency | ≤ 28 (incl. fan power) | ≤ 31 (incl. fan power) | ≤ 33 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 23100 | 23100 | 23100 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 4700 | 4900 | 5000 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 4260x1600x2670 | 4260x1600x2670 | 4260x1600x2670 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

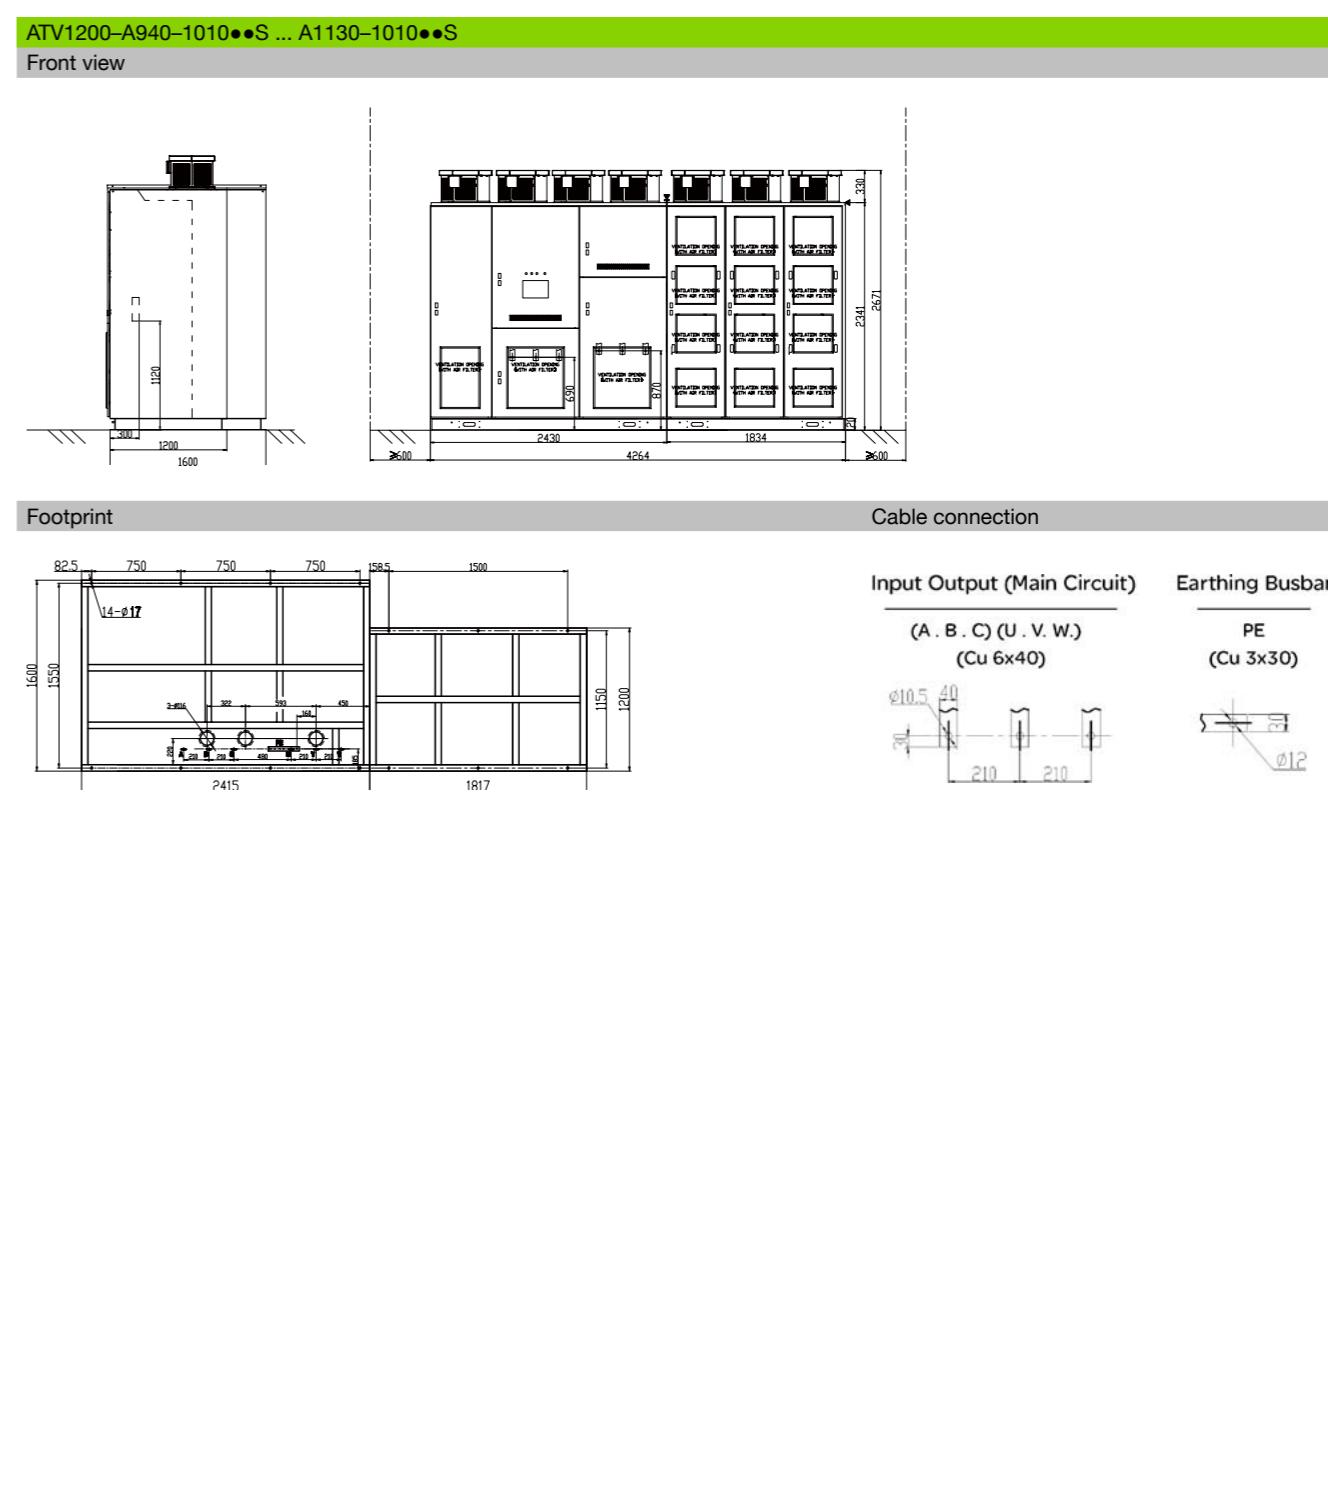

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A1250-1010••• | A1570-1010••• | A1730-1010••• |
| Nominal data | | | |
| Type rating [kVA] | 1250 | 1570 | 1730 |
| Motor power [kW] | 1045 | 1313 | 1446 |
| Continuous output current [A] | | | |
| With 120 % overload | 72 | 91 | 100 |
| With 150 % overload | 58 | 73 | 80 |
| Max. output current [A] | | | |
| 1 min/10 min | 87 | 109 | 120 |
| Power cells | | | |
| Number of cells per phase | 8 | 8 | 8 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 42 (incl. fan power) | ≤ 53 (incl. fan power) | ≤ 58 (incl. fan power) |
| High efficiency | ≤ 37 (incl. fan power) | ≤ 46 (incl. fan power) | ≤ 51 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 23100 | 23100 | 23100 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 5100 | 5500 | 5700 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 4260x1700x2670 | 4260x1700x2670 | 4260x1700x2670 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

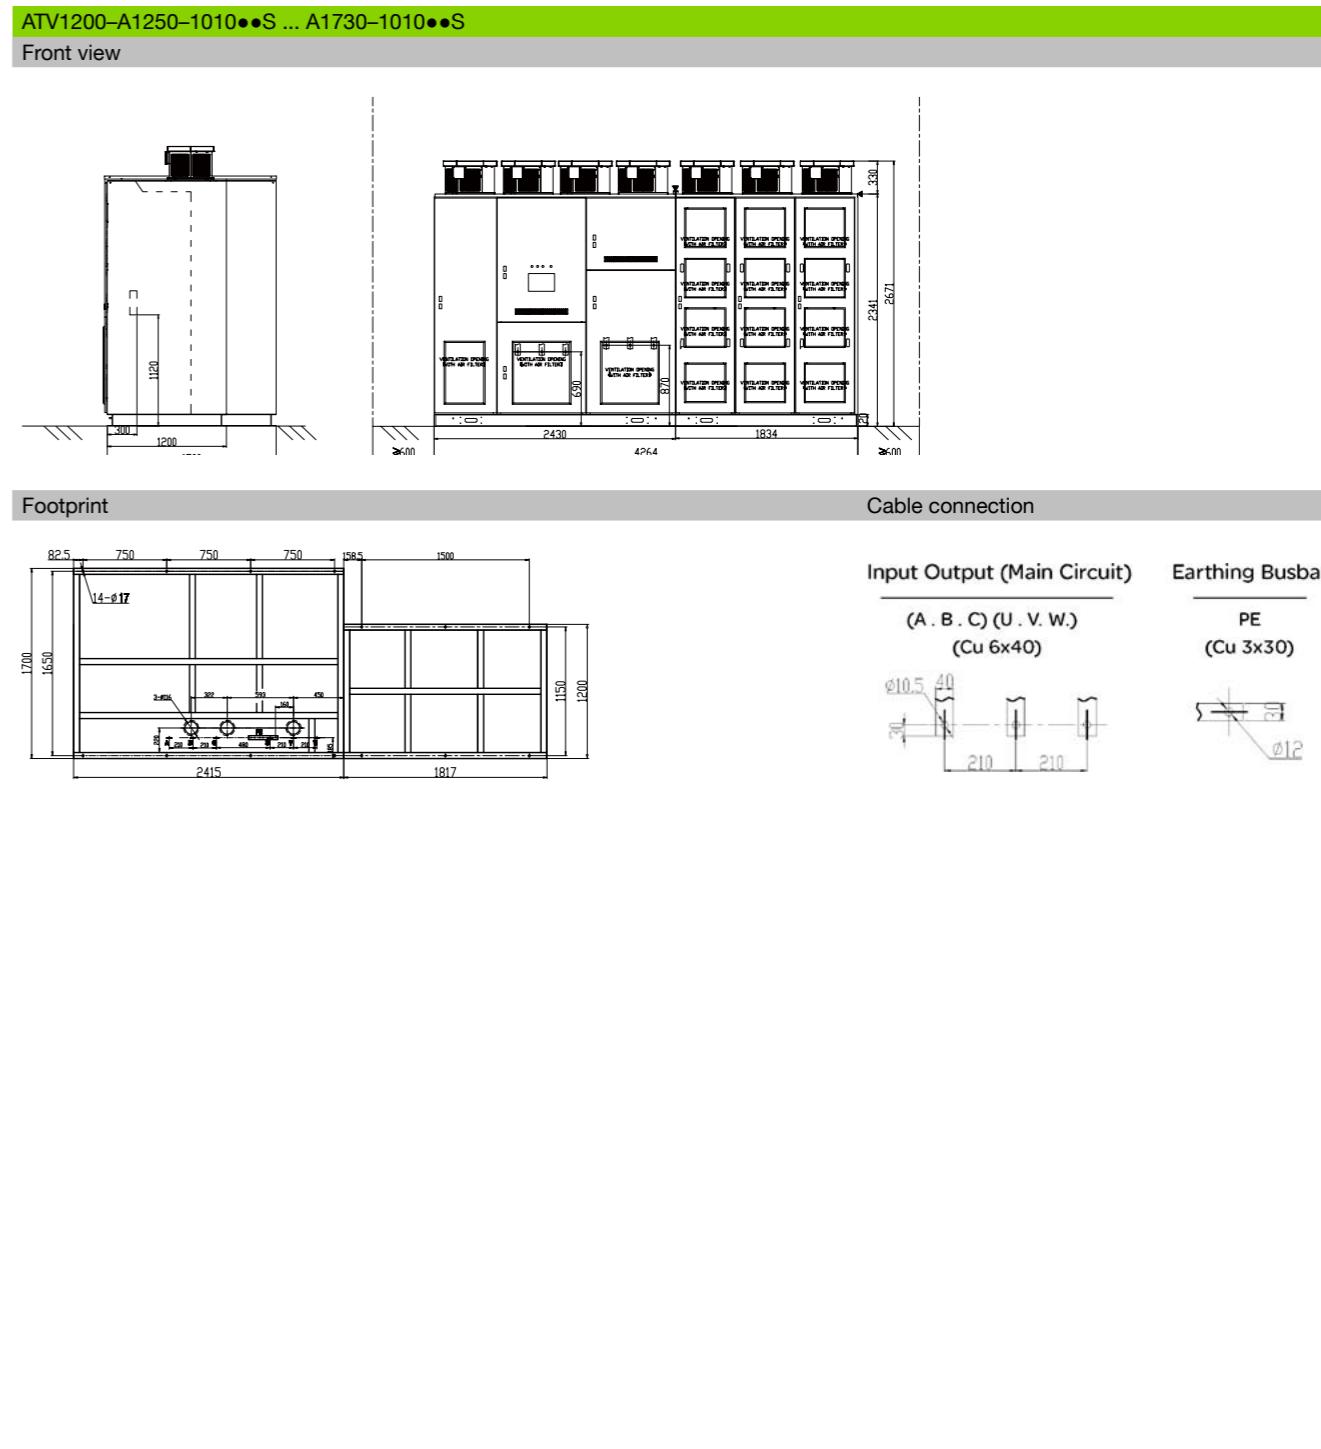

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | |
|---|-----------------------------|-----------------------------|
| ATV1200 | A2000-1010••• | A2340-1010••• |
| Nominal data | | |
| Type rating [kVA] | 2000 | 2340 |
| Motor power [kW] | 1672 | 1956 |
| Continuous output current [A] | | |
| With 120 % overload | 115 | 135 |
| With 150 % overload | 92 | 108 |
| Max. output current [A] | | |
| 1 min/10 min | 139 | 162 |
| Power cells | | |
| Number of cells per phase | 8 | 8 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 67 (incl. fan power) | ≤ 78 (incl. fan power) |
| High efficiency | ≤ 59 (incl. fan power) | ≤ 68 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 23100 | 23100 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 6900 | 7300 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 5160x1700x2670 | 5160x1700x2670 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

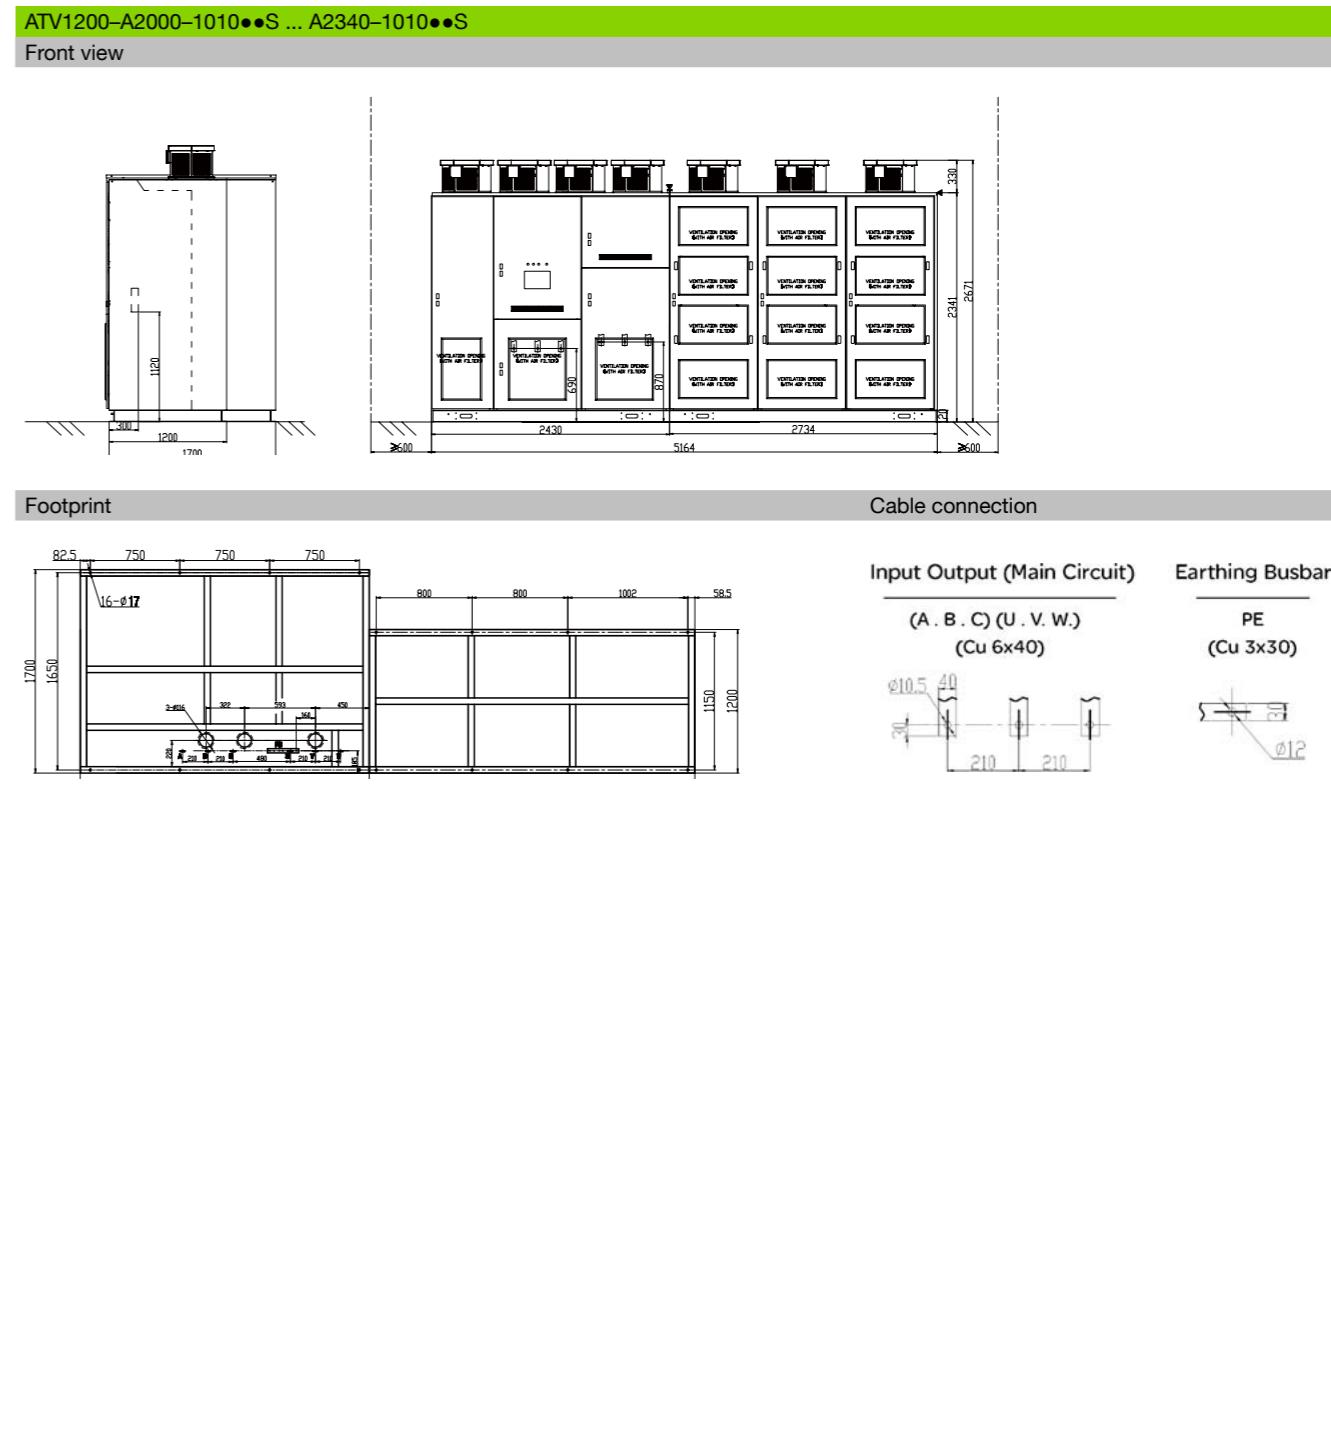

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

Technical data for output voltage 10 kV

| | |
|---------|---------------|
| ATV1200 | A2600-1010••• |
|---------|---------------|

Nominal data

| | |
|-------------------|------|
| Type rating [kVA] | 2600 |
|-------------------|------|

| | |
|------------------|------|
| Motor power [kW] | 2174 |
|------------------|------|

| | |
|-------------------------------|-----|
| Continuous output current [A] | |
| With 120 % overload | 150 |
| With 150 % overload | 120 |
| Max. output current [A] | |
| 1 min/10 min | 180 |

| | |
|---------------------------|---|
| Power cells | |
| Number of cells per phase | 8 |

Characteristics

| | |
|------------------------------------|---------------------------|
| Efficiency (incl. transformer) [%] | |
| Standard efficiency | ≥ 96 (incl. fan power) |

| | |
|-----------------|-----------------------------|
| High efficiency | ≥ 96.5 (incl. fan power) |
|-----------------|-----------------------------|

| | |
|--------------------------------|---------------------------|
| Total losses at 100% load [kW] | |
| Standard efficiency | ≤ 87 (incl. fan power) |

| | |
|-----------------|---------------------------|
| High efficiency | ≤ 76 (incl. fan power) |
|-----------------|---------------------------|

Air flow [m³/h]

| | |
|---------------------|-------|
| Standard efficiency | 43200 |
| High efficiency | |

| | |
|------------------------------|------|
| Sound pressure level [dB(A)] | |
| | ≤ 80 |

Weight [kg]

| | |
|---------------------|------|
| Standard efficiency | 7900 |
| High efficiency | |

Dimension[mm] W*D*H

| | |
|---------------------|----------------|
| Standard efficiency | 6060x1500x2740 |
| High efficiency | |

Connection

Incoming cable

| | |
|------------------------------|----------------------|
| Type | standard symmetrical |
| Max. size | see drawing |
| Motor cable | |
| Type | 3 core |
| Max. size | see drawing |
| Max. length (without filter) | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 10 kV

ATV1200-A2600-1010••S

Front view

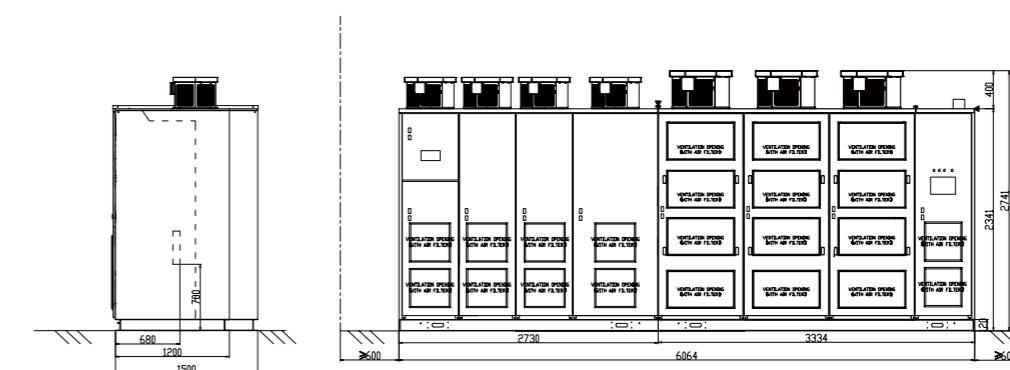


Footprint

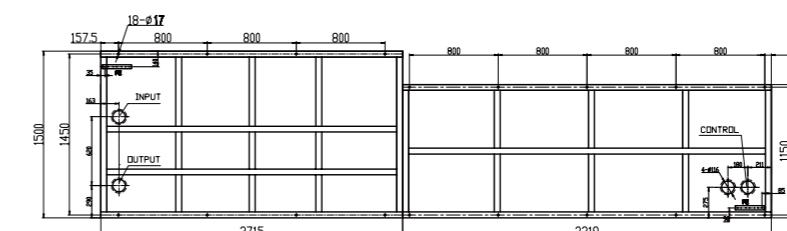

Cable connection


Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)

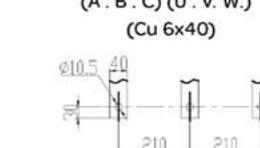

Earthing Busbar

PE
(Cu 3x30)



Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | | | |
|---|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A2800-1010••• | A3130-1010••• | A3470-1010••• | A3810-1010••• |
| Nominal data | | | | |
| Type rating [kVA] | | | | |
| 2800 | 3130 | 3470 | 3810 | |
| Motor power [kW] | | | | |
| 2341 | 2617 | 2901 | 3185 | |
| Continuous output current [A] | | | | |
| With 120 % overload | 162 | 181 | 200 | 220 |
| With 150 % overload | 129 | 145 | 160 | 176 |
| Max. output current [A] | | | | |
| 1 min/10 min | 194 | 217 | 240 | 264 |
| Power cells | | | | |
| Number of cells per phase | | | | |
| | 8 | 8 | 8 | 8 |
| Characteristics | | | | |
| Efficiency (incl. transformer) [%] | | | | |
| Standard efficiency | ≥ 96 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | | |
| Standard efficiency | ≤ 94 (incl. fan power) | ≤ 105 (incl. fan power) | ≤ 116 (incl. fan power) | ≤ 127 (incl. fan power) |
| High efficiency | ≤ 82 (incl. fan power) | ≤ 92 (incl. fan power) | ≤ 102 (incl. fan power) | ≤ 111 (incl. fan power) |
| Air flow [m³/h] | | | | |
| Standard efficiency | 26400 | 26400 | 26400 | 26400 |
| High efficiency | | | | |
| Sound pressure level [dB(A)] | | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | | |
| Standard efficiency | 9100 | 9400 | 9900 | 10300 |
| High efficiency | | | | |
| Dimension[mm] W*D*H | | | | |
| Standard efficiency | 6870x1500x2670 | 6870x1500x2670 | 6870x1500x2670 | 6870x1500x2670 |
| High efficiency | | | | |
| Connection | | | | |
| Incoming cable | | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing | see drawing |
| Motor cable | | | | |
| Type | 3 core | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

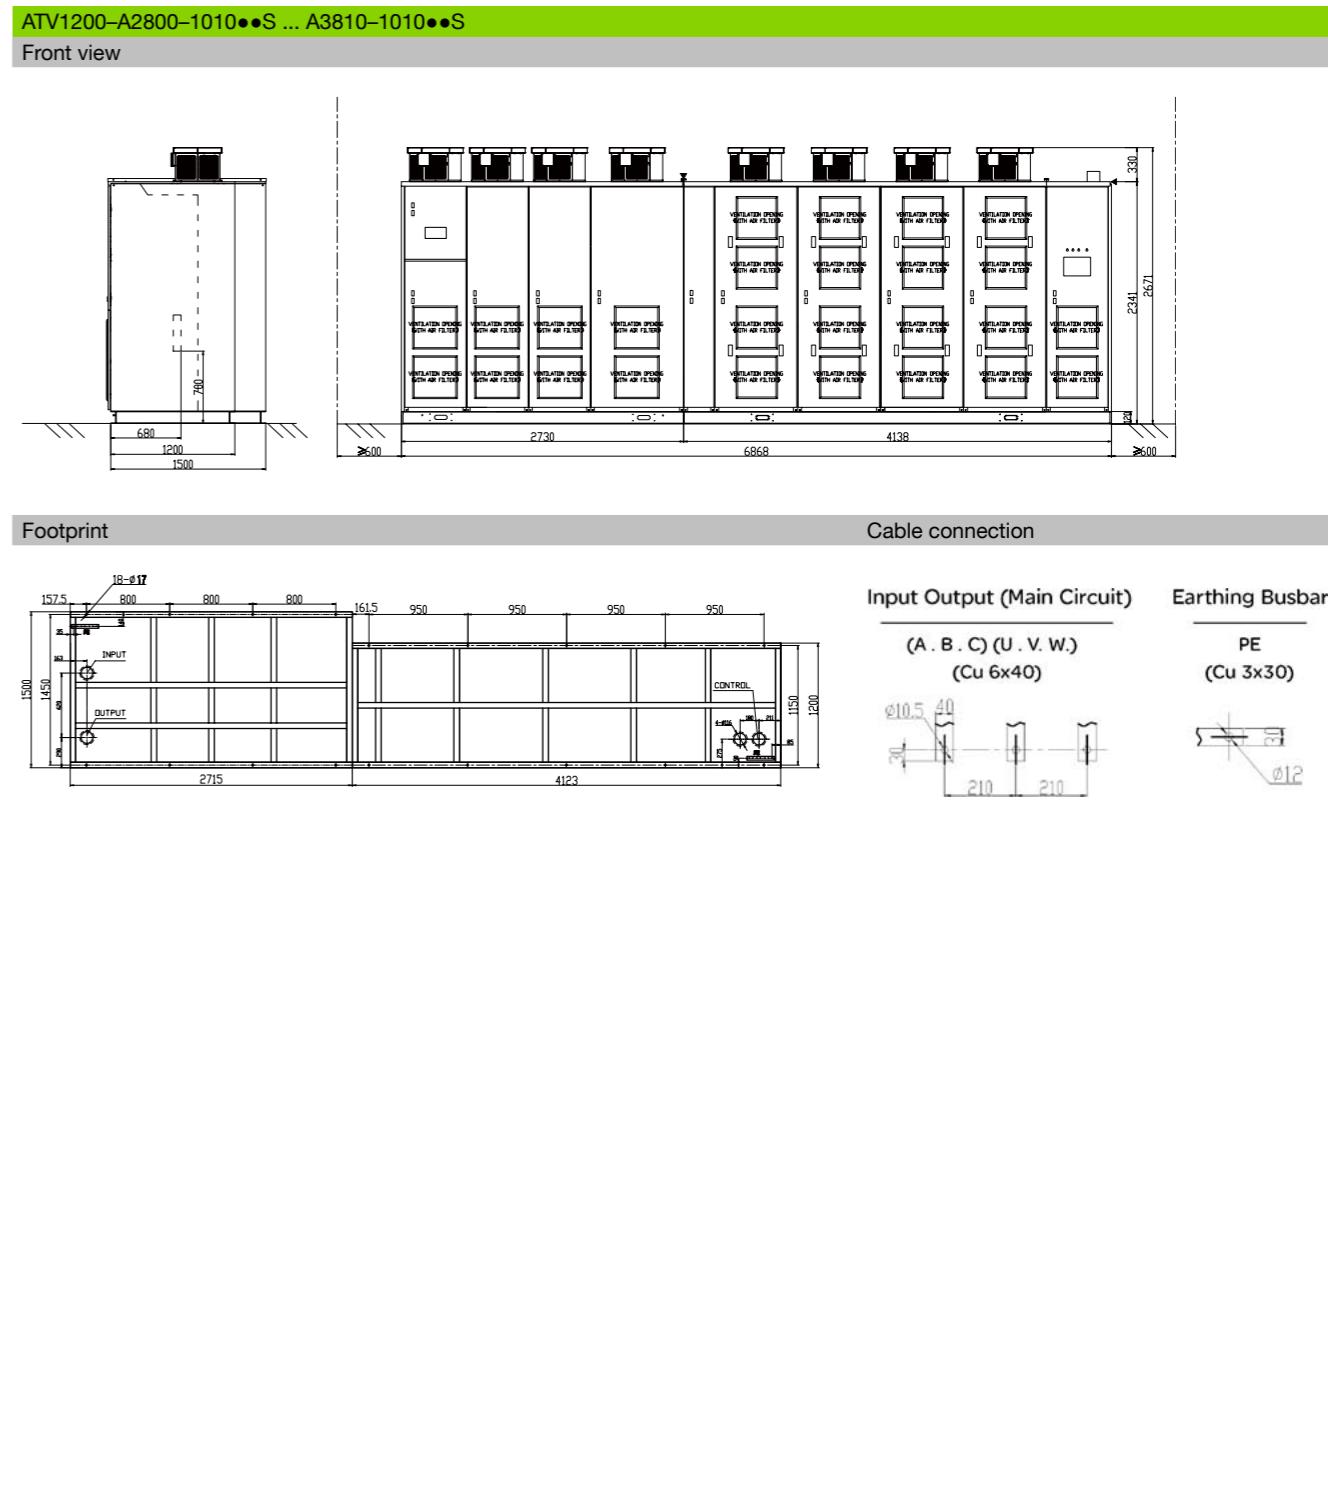

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

Technical data for output voltage 10 kV

| | | |
|------------------------------------|-----------------------------|-----------------------------|
| ATV1200 | A4440-1010••• | A4850-1010••• |
| Nominal data | | |
| Type rating [kVA] | 4440 | 4850 |
| Motor power [kW] | 3712 | 4055 |
| Continuous output current [A] | | |
| With 120 % overload | 256 | 280 |
| With 150 % overload | 205 | 224 |
| Max. output current [A] | | |
| 1 min/10 min | 308 | 336 |
| Power cells | | |
| Number of cells per phase | 8 | 8 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96.1 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 148 (incl. fan power) | ≤ 158 (incl. fan power) |
| High efficiency | ≤ 130 (incl. fan power) | ≤ 142 (incl. fan power) |
| Air flow [m³/h] | | |
| Standard efficiency | 70000 | 70000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 11500 | 12000 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 7170x1600x3040 | 7170x1600x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |


Technical data

Altivar 1200


Medium Voltage Drive Systems

Output voltage 10 kV


ATV1200-A4440-1010••S ... A4850-1010••S
Front view

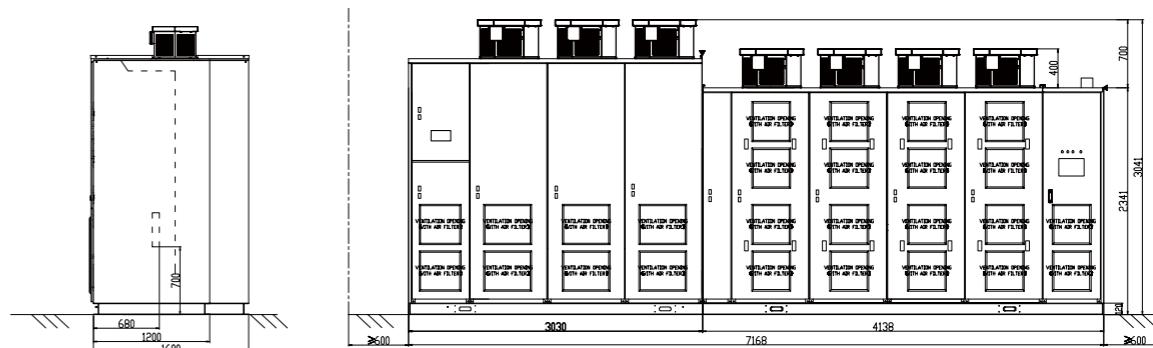

Footprint

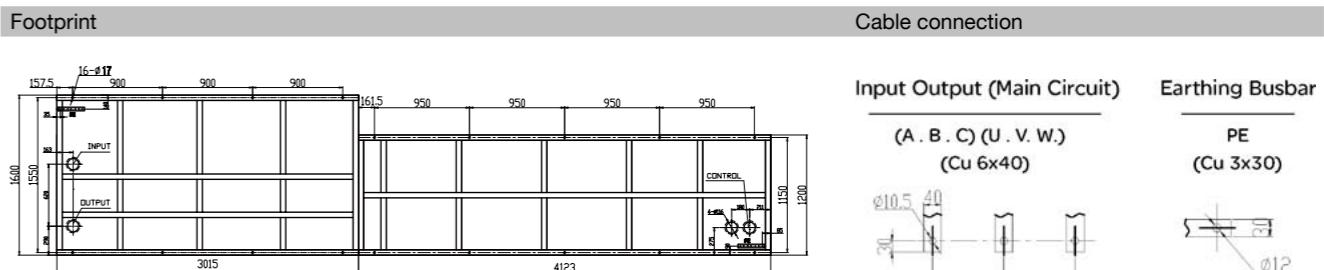

Cable connection

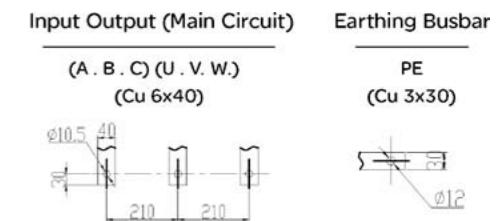

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A5000-1010••• | A5540-1010••• | A6250-1010••• |
| Nominal data | | | |
| Type rating [kVA] | 5000 | 5540 | 6250 |
| Motor power [kW] | | | |
| | 4180 | 4631 | 5225 |
| Continuous output current [A] | | | |
| With 120 % overload | 289 | 320 | 361 |
| With 150 % overload | 231 | 256 | 289 |
| Max. output current [A] | | | |
| 1 min/10 min | 346 | 384 | 433 |
| Power cells | | | |
| Number of cells per phase | 8 | 8 | 8 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.1 (incl. fan power) | ≥ 96.1 (incl. fan power) | ≥ 96.1 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 163 (incl. fan power) | ≤ 181 (incl. fan power) | ≤ 204 (incl. fan power) |
| High efficiency | ≤ 146 (incl. fan power) | ≤ 162 (incl. fan power) | ≤ 183 (incl. fan power) |
| Air flow [m³/h] | | | |
| Standard efficiency | 56400 | 56400 | 56400 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 14800 | 15200 | 16700 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 9070x1600x3040 | 9070x1600x3040 | 9070x1600x3040 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

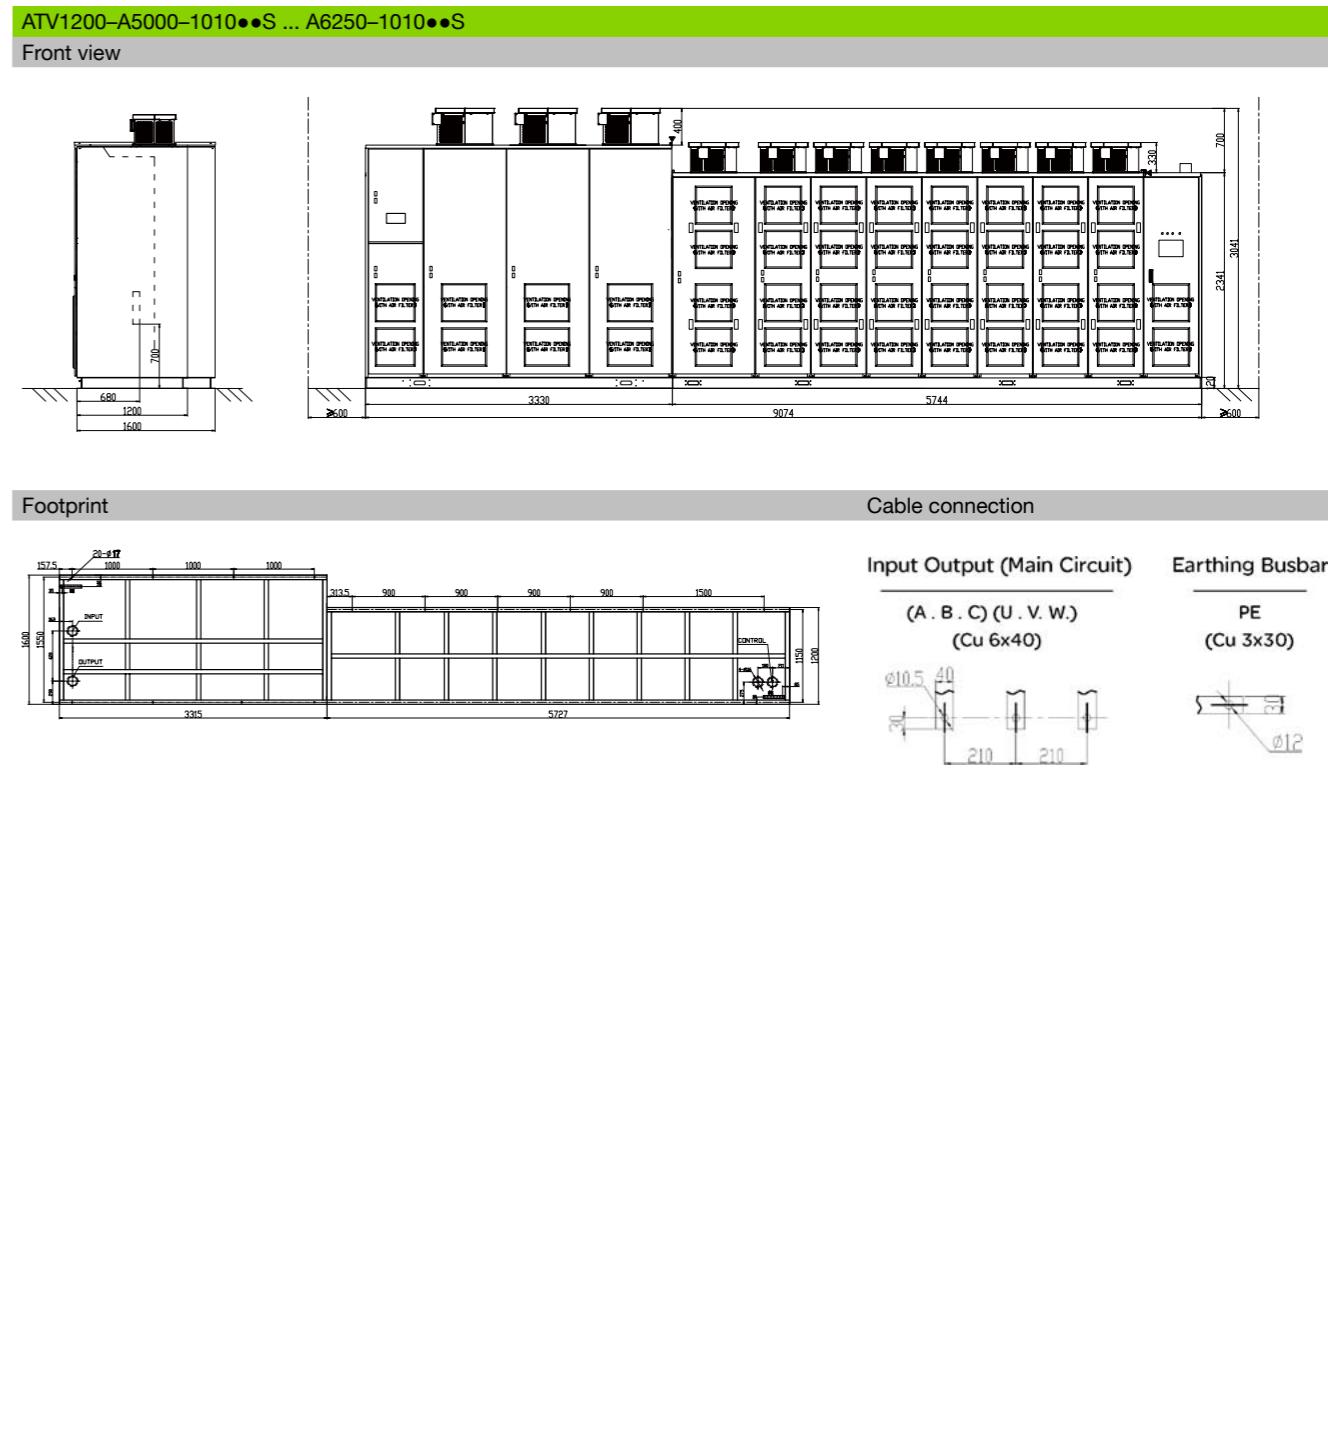

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

| Technical data for output voltage 10 kV | | | |
|---|-----------------------------|-----------------------------|-----------------------------|
| ATV1200 | A7100-1010••• | A7900-1010••• | A8500-1010••• |
| Nominal data | | | |
| Type rating [kVA] | 7100 | 7900 | 8500 |
| Motor power [kW] | | | |
| | 5936 | 6604 | 7106 |
| Continuous output current [A] | | | |
| With 120 % overload | 410 | 456 | 490 |
| With 150 % overload | 328 | 365 | 392 |
| Max. output current [A] | | | |
| 1 min/10 min | 492 | 547 | 588 |
| Power cells | | | |
| Number of cells per phase | 8 | 8 | 8 |
| Characteristics | | | |
| Efficiency (incl. transformer) [%] | | | |
| Standard efficiency | ≥ 96.3 (incl. fan power) | ≥ 96.7 (incl. fan power) | ≥ 96.8 (incl. fan power) |
| High efficiency | ≥ 96.5 (incl. fan power) | | |
| Total losses at 100% load [kW] | | | |
| Standard efficiency | ≤ 220 (incl. fan power) | ≤ 218 (incl. fan power) | ≤ 227 (incl. fan power) |
| High efficiency | ≤ 208 (incl. fan power) | | |
| Air flow [m³/h] | | | |
| Standard efficiency | 66400 | 110000 | 110000 |
| High efficiency | | | |
| Sound pressure level [dB(A)] | | | |
| | ≤ 80 | ≤ 80 | ≤ 80 |
| Weight [kg] | | | |
| Standard efficiency | 18300 | 20100 | 20100 |
| High efficiency | | | |
| Dimension[mm] W*D*H | | | |
| Standard efficiency | 9370x1700x3040 | 9370x1700x3040 | 9370x1700x3040 |
| High efficiency | | | |
| Connection | | | |
| Incoming cable | | | |
| Type | standard symmetrical | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing | see drawing |
| Motor cable | | | |
| Type | 3 core | 3 core | 3 core |
| Max. size | see drawing | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m | 2000 m |

Technical data


Altivar 1200

Medium Voltage Drive Systems


Output voltage 10 kV

ATV1200-A7100-1010••S ... A8500-1010••S


Front view

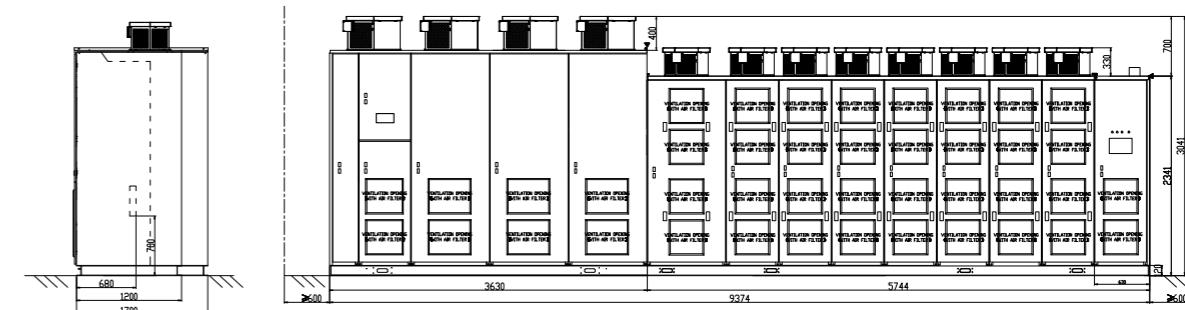

Footprint

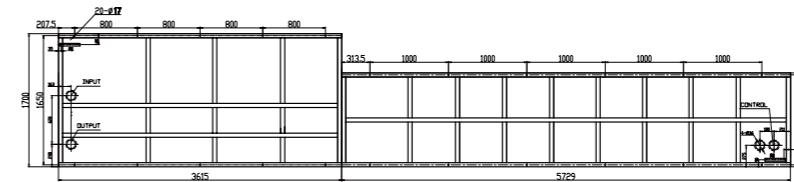


Cable connection

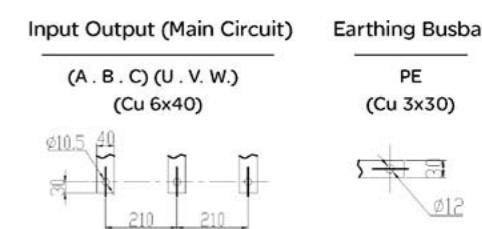


Input Output (Main Circuit)

(A . B . C) (U . V . W.)
(Cu 6x40)



Earthing Busbar

PE
(Cu 3x30)



Technical data

Altivar 1200


Medium Voltage Drive Systems
Output voltage 10 kV

| Technical data for output voltage 10 kV | | |
|---|----------------------------|-----------------------------|
| ATV1200 | A9530-1010••• | A10600-1010••• |
| Nominal data | | |
| Type rating [kVA] | 9530 | 10600 |
| Motor power [kW] | 7967 | 8862 |
| Continuous output current [A] | | |
| With 120 % overload | 550 | 612 |
| With 150 % overload | 440 | 490 |
| Max. output current [A] | | |
| 1 min/10 min | 660 | 734 |
| Power cells | | |
| Number of cells per phase | 8 | 8 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96 (incl. fan power) | ≥ 96.1 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 319 (incl. fan power) | ≤ 346 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 140000 | 140000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 26200 | 26700 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 14480x1600x3040 | 14480x1600x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems
Output voltage 10 kV

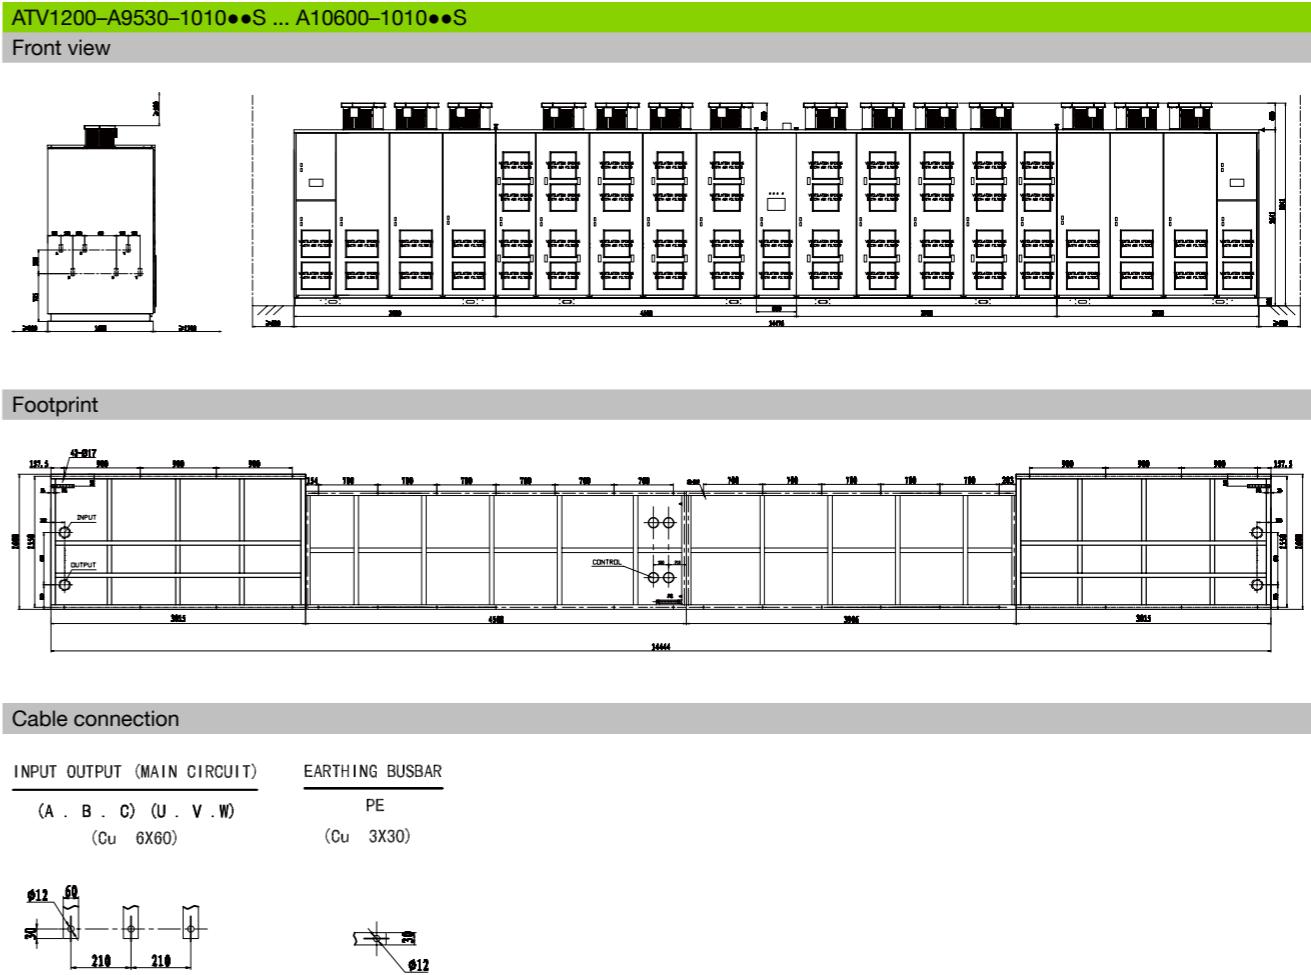

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | |
|---|-----------------------------|-----------------------------|
| ATV1200 | A11500-1010••• | A12500-1010••• |
| Nominal data | | |
| Type rating [kVA] | 11500 | 12500 |
| Motor power [kW] | 9614 | 10450 |
| Continuous output current [A] | | |
| With 120 % overload | 664 | 720 |
| With 150 % overload | 531 | 576 |
| Max. output current [A] | | |
| 1 min/10 min | 797 | 864 |
| Power cells | | |
| Number of cells per phase | 8 | 8 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.1 (incl. fan power) | ≥ 96.2 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 375 (incl. fan power) | ≤ 397 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 140000 | 140000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 28400 | 30400 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 15080x1600x3040 | 15080x1600x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

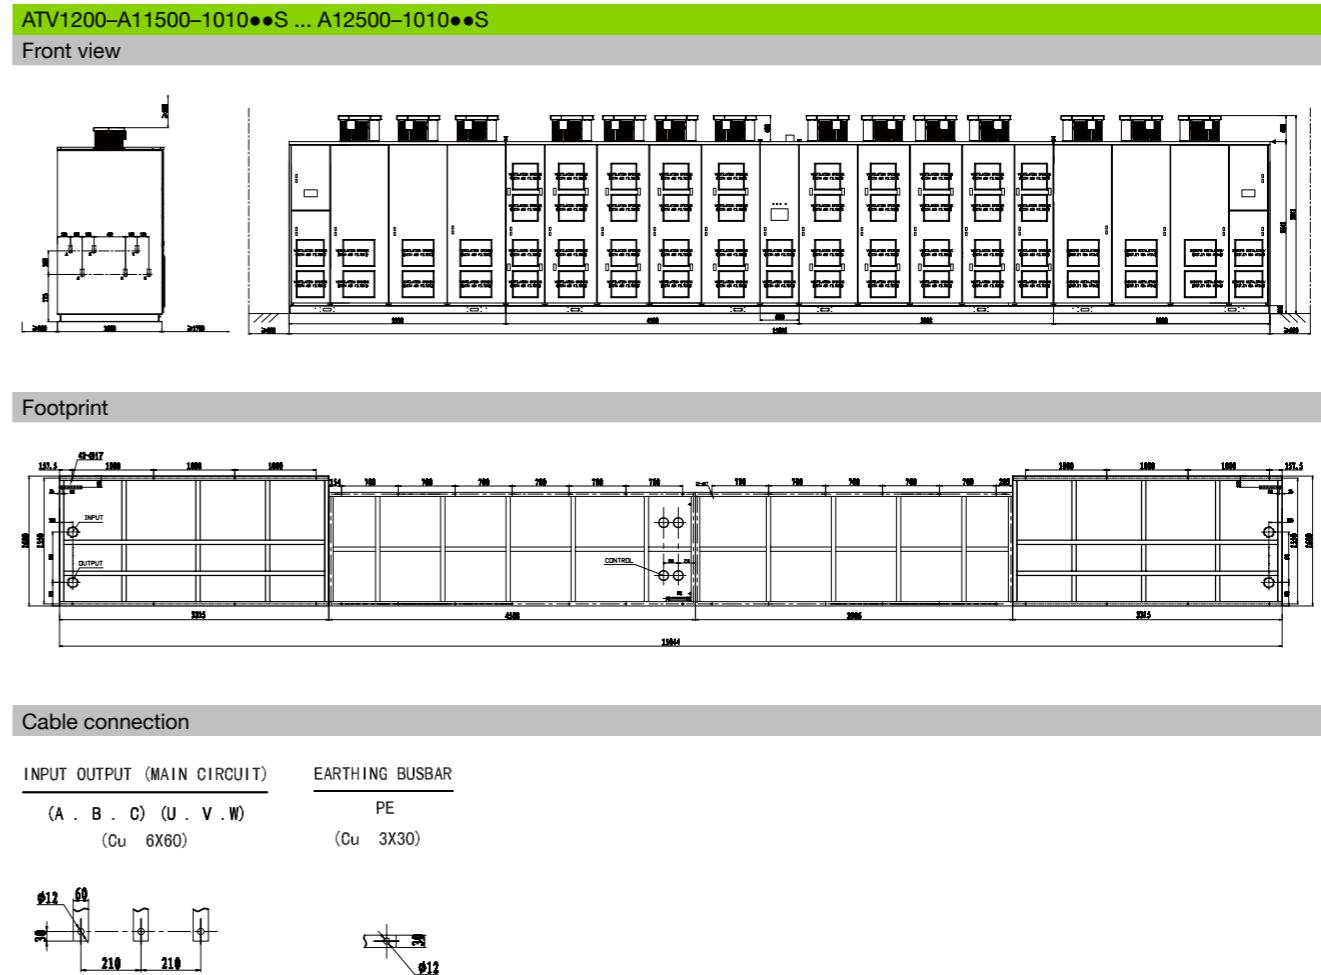

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV


| Technical data for output voltage 10 kV | | |
|---|-----------------------------|-----------------------------|
| ATV1200 | A13500-1010••• | A14750-1010••• |
| Nominal data | | |
| Type rating [kVA] | 13500 | 14750 |
| Motor power [kW] | 11286 | 12331 |
| Continuous output current [A] | | |
| With 120 % overload | 779 | 850 |
| With 150 % overload | 624 | 680 |
| Max. output current [A] | | |
| 1 min/10 min | 935 | 1020 |
| Power cells | | |
| Number of cells per phase | 8 | 8 |
| Characteristics | | |
| Efficiency (incl. transformer) [%] | | |
| Standard efficiency | ≥ 96.3 (incl. fan power) | ≥ 96.5 (incl. fan power) |
| High efficiency | | |
| Total losses at 100% load [kW] | | |
| Standard efficiency | ≤ 418 (incl. fan power) | ≤ 432 (incl. fan power) |
| High efficiency | | |
| Air flow [m³/h] | | |
| Standard efficiency | 160000 | 160000 |
| High efficiency | | |
| Sound pressure level [dB(A)] | | |
| | ≤ 80 | ≤ 80 |
| Weight [kg] | | |
| Standard efficiency | 32000 | 37400 |
| High efficiency | | |
| Dimension[mm] W*D*H | | |
| Standard efficiency | 15680x1700x3040 | 15680x1700x3040 |
| High efficiency | | |
| Connection | | |
| Incoming cable | | |
| Type | standard symmetrical | standard symmetrical |
| Max. size | see drawing | see drawing |
| Motor cable | | |
| Type | 3 core | 3 core |
| Max. size | see drawing | see drawing |
| Max. length (without filter) | 2000 m | 2000 m |

Technical data

Altivar 1200

Medium Voltage Drive Systems

Output voltage 10 kV

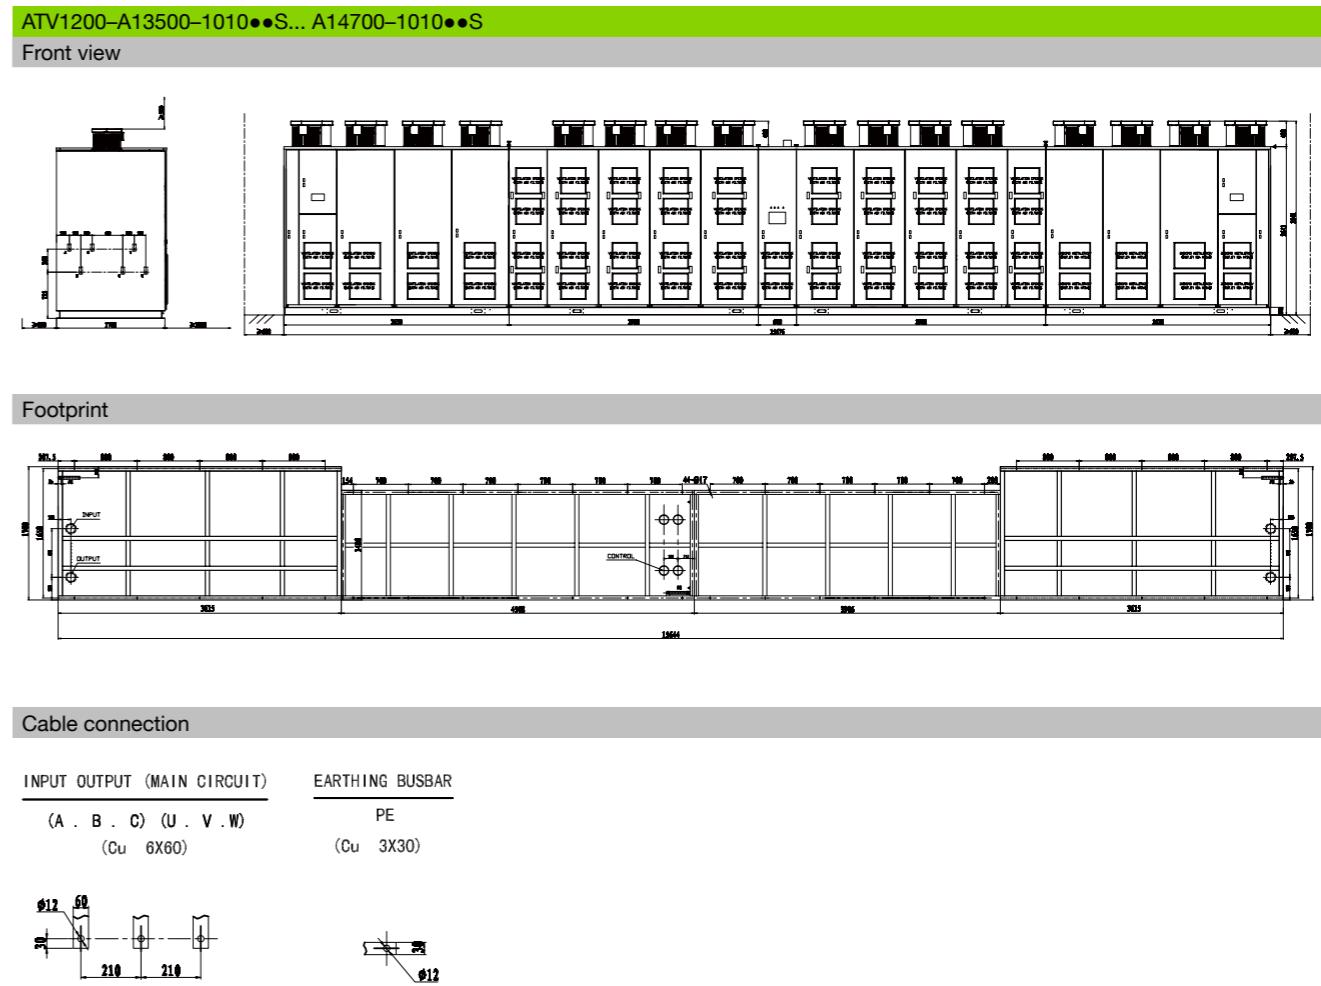



Make the most of your energy